


AMERICAN COUNTRY
COLLECTION
—by Somerset™—



Hickory Sunset
(Hickory)

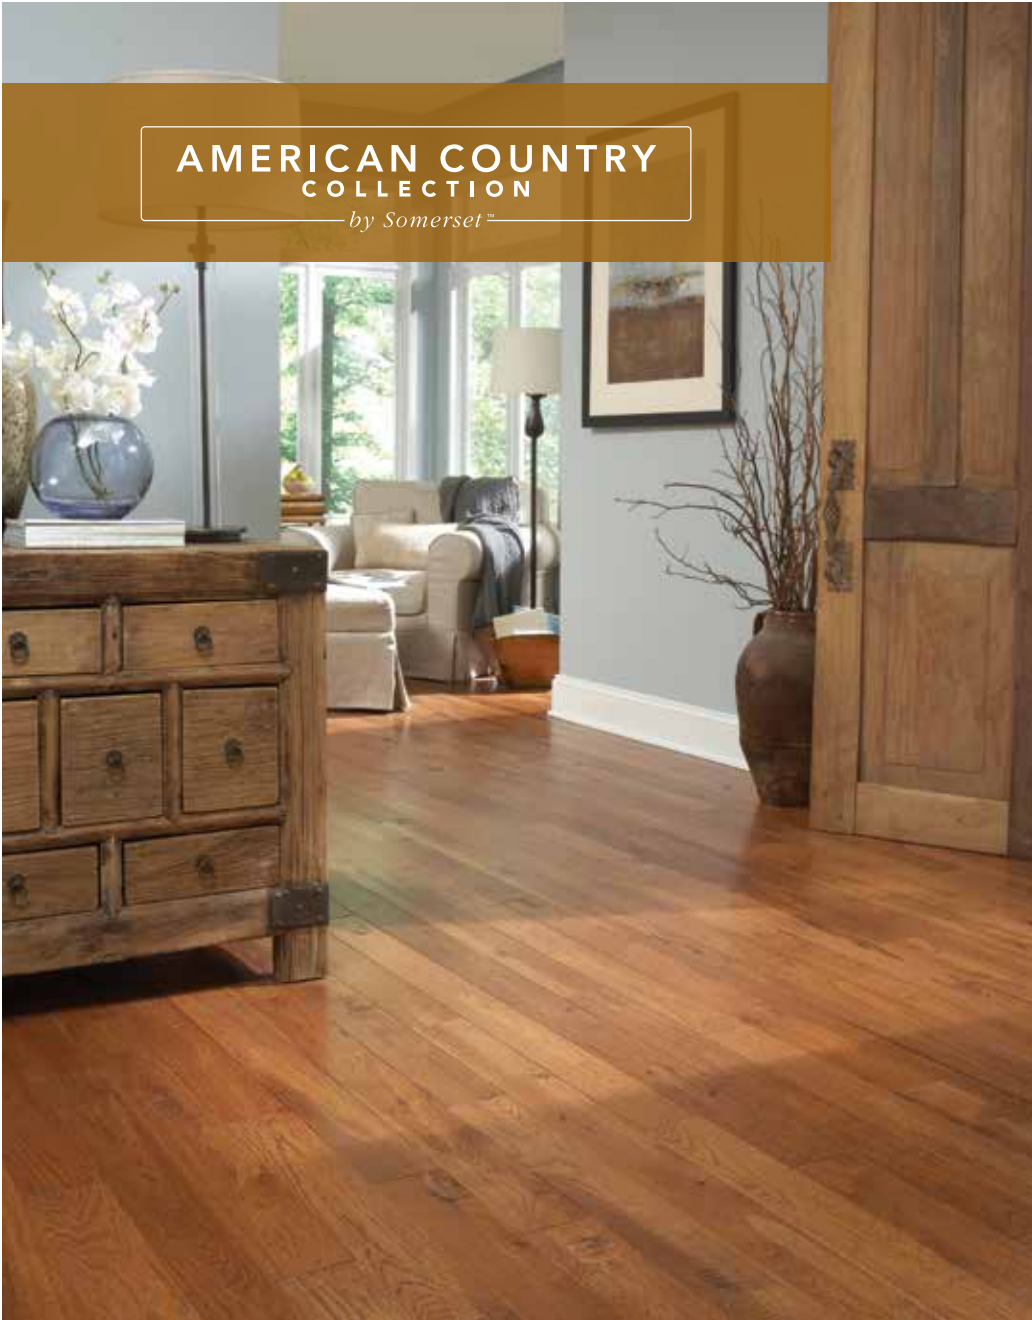

Toast
(Maple)



Forest Brown
(Maple)



Desert Tan
(Maple)



Royal Brown
(White Oak)



Buttercup
(White Oak)



Merlot
(Maple)

ENJOY THE TEXTURE AND TIMEWORN APPEARANCE OF SOLID AND ENGINEERED FLOORING THAT FEATURES SUBTLE HAND SCRAPING AND RUSTIC CHARACTER MARKINGS.



S SOLID

3/4" thick; random lengths

WIDTHS: 4", 5"

E ENGINEERED

1/2" thick, solid sawn face; 8 plies; random lengths

WIDTHS: 4", 5"



PRODUCT SPECIFICATION SHEET

06/12

AMERICAN COUNTRY: SOLID



Product:	Somerset Country Collection Solid Hardwood Flooring			
Species:	Maple, Hickory, or White Oak			
Grade:	Proprietary Somerset character grade that will include but is not limited to, small, sound open knots, mineral, worm holes, heartwood, sapwood, and burls.			
Dimensions:	Thickness: 3/4"* Widths: 4", 5"* Lengths: Random up to 6-1/2' (conforms to NOFMA Standard and Better specification) <small>*Nominal</small>			
Construction:	Traditional 3/4" solid construction produced from domestically grown and harvested Appalachian hardwood. Material conforms to Appalachian Hardwood Manufacturers Inc.'s Verified Sustainable Seal (www.appalachianwood.org) and is available as a FSC Certified Product (Forest Stewardship Council) at an additional cost. Product is also affiliated with National Oak Flooring Manufacturers Association and the National Wood Flooring Association.			
Profile:	Beveled Edge, Beveled End			
Finish:	Ultimate™ Urethane Finish — UV Cured Aluminum Oxide, Abrasion Resistant Finish			
Colors:	4" Width	5" Width	Base Species	
	Hickory Sunset	AC41HSS	AC51HSS	Hickory
	Toast	AC41TO	AC51TO	Maple
	Forest Brown	AC41FB	AC51FB	Maple
	Desert Tan	AC41DT	AC51DT	Maple
	Royal Brown	AC41RB	AC51RB	White Oak
	Buttercup	AC41BU	AC51BU	White Oak
	Merlot	AC41ML	AC51ML	Maple
Gloss Level:	Low Gloss			
Janka Hardness:	Species	Lbs		
	White Oak	1360	Hickory 1820	
	Maple	1450		
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request			
Flame Spread:	Class C			
Installation:	Nail down or staple, on or above grade. (NWFA Installation Guidelines and Methods, Revised March 2007). Installation guidelines are printed on the bottom of each carton and available at Somersetfloors.com .			
Maintenance:	Somerset Ultimate™ Wood Floor Cleaner (www.somersetfloors.com)			
Limited Warranty:	50-Year Finish Wear; Lifetime Structural Integrity (www.somersetfloors.com)			
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer			

AMERICAN COUNTRY: ENGINEERED



Product:	Somerset Country Collection Engineered Hardwood Flooring												
Species:	Maple, Hickory, or White Oak												
Grade:	Proprietary Somerset character grade that will include but is not limited to, small, sound open knots, mineral, worm holes, heartwood, sapwood, and burls.												
Dimensions:	Thickness: 1/2"*; 3mm* dry sawn face Widths: 4", 5" Lengths: Random up to 6-1/2' <small>*Nominal</small>												
Construction:	8 ply cross grain engineered construction; 7 ply birch core												
Profile:	Eased Edge, Eased End												
Finish:	Ultimate™ Urethane Finish — UV Cured Aluminum Oxide, Abrasion Resistant Finish												
Colors:	4" Width	5" Width	Base Species										
	Hickory Sunset	EP41ACHSE	EP51ACHSE	Hickory									
	Toast	EP41ACTOE	EP51ACTOE	Maple									
	Forest Brown	EP41ACFBE	EP51ACFBE	Maple									
	Desert Tan	EP41ACDTE	EP51ACDTE	Maple									
	Royal Brown	EP41ACRBE	EP51ACRBE	White Oak									
	Buttercup	EP41ACBUE	EP51ACBUE	White Oak									
	Merlot	EP41ACMLE	EP51ACMLE	Maple									
Gloss Level:	Semi Gloss												
Janka Hardness:	<table border="1"> <thead> <tr> <th>Species</th> <th>Lbs</th> </tr> </thead> <tbody> <tr> <td>White Oak</td> <td>1360</td> </tr> <tr> <td>Maple</td> <td>1450</td> </tr> </tbody> </table>	Species	Lbs	White Oak	1360	Maple	1450	<table border="1"> <thead> <tr> <th>Species</th> <th>Lbs</th> </tr> </thead> <tbody> <tr> <td>Hickory</td> <td>1820</td> </tr> </tbody> </table>	Species	Lbs	Hickory	1820	
Species	Lbs												
White Oak	1360												
Maple	1450												
Species	Lbs												
Hickory	1820												
MSDS:	Not required for cured finish, MSDS for Wood Dust available on request												
Flame Spread:	Class C												
Installation:	Nail, staple, glue down, or float on, above or below grade (ground level). (NWFA Installation Guidelines and Methods, Revised March 2007). Installation guidelines are printed on the bottom of each carton and available at Somersetfloors.com.												
Maintenance:	Somerset Ultimate Wood Flooring Cleaner (www.somersetfloors.com)												
Limited Warranty:	50 year finish wear; Lifetime Structural Integrity (www.somersetfloors.com)												
Molding:	Quarter Round, Stair Nose, Threshold, T-Mold, and Reducer												