



### BEFORE YOU BEGIN

- Observe all local plumbing and building codes.
- Follow these instructions only if it apply to your installation.
- Before installation, carefully inspect it for damage. Return the vanity top to its packaging until you are ready to install it.
- These instructions contain important care and cleaning instructions. Please review these instructions carefully.

### SUGGESTED TOOLS AND MATERIALS



Philips Screwdriver



Silicon Sealant



Tape Measure



Safety Glasses

### PARTS / HARDWARE INCLUDED



4x

120003



4x

111213



4x

111214



4x


500001

### SINK INSTALLATION




**CAUTION!** Risk of product damage. Do not use plumbers putty or oil-based sealers with this vanity top. These products will stain the surfaces permanently.

**1**

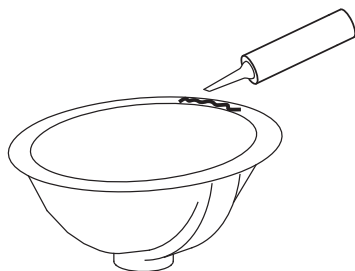


Apply a continuous bead of quality sealant to the top surface (rim) of the sink.

**2**

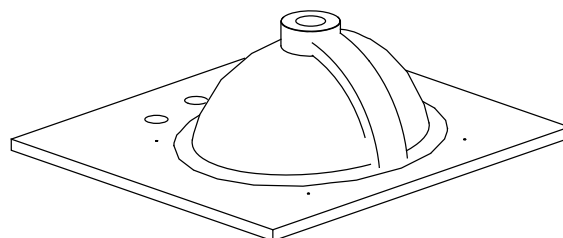

Turn the vanity top upside down and place it on a clean, scratch resistant surface. Center the sink over the cutout.

**3**

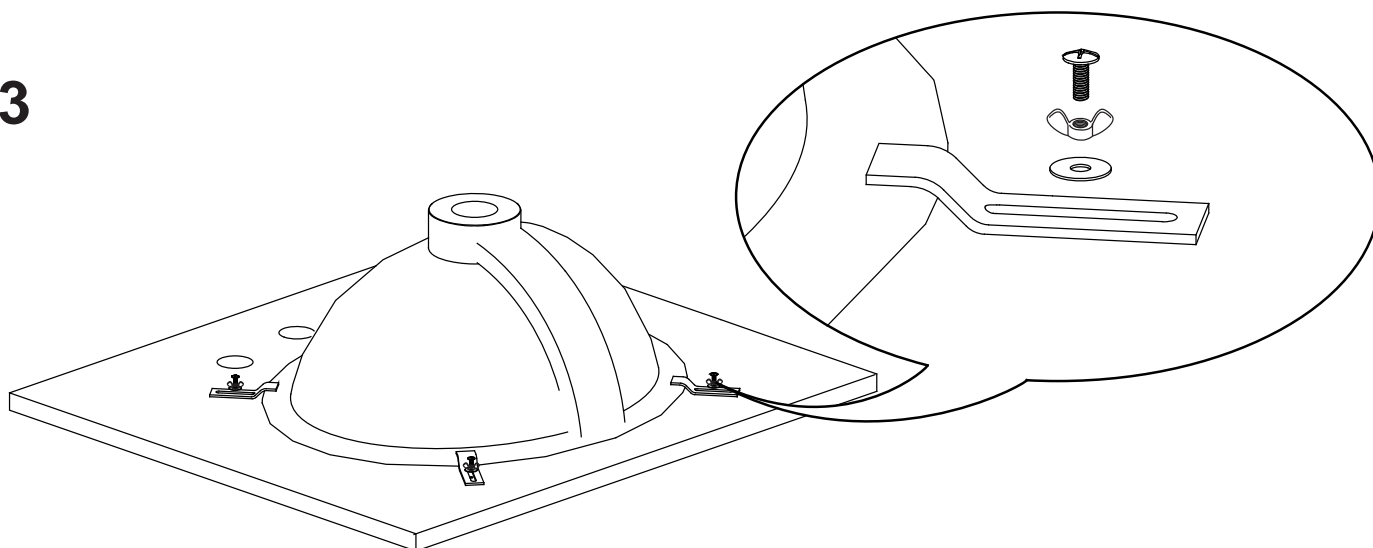

Secure the sink to the top using the mounting kit / hardware provided.

**\*\* NOTE:** Sink style, shape, cutout on top may vary from the picture above. Instructional purposes only