


The photograph may not match the reference exactly. Please read the product description to identify the finish.




TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable:	Adjustable $\pm 90^\circ$ on the vertical axis
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Light source 1:	14 x LED Cree 24W Warm White - 3000K 1750 lm ^(N) CRI 80
Angle of the optics / Reflector:	15x50°
Voltage / Frequency:	24 VDC
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	9
Net Weight (Kg):	1.2
EAN:	8435381402228

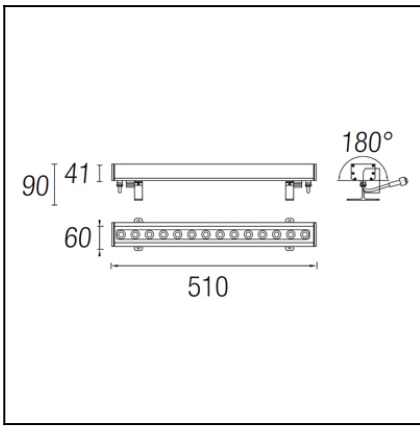

LED 24W

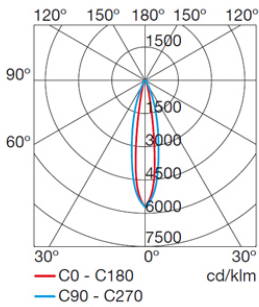


MATERIALS / FINISHES

Structure material:	Aluminium	Diffuser material:	UVA glass
Structure finish:	Anodized	Diffuser finish:	Transparent

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt / .ies

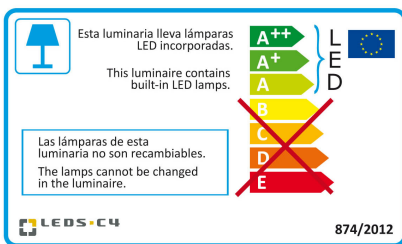



Click on image to download energy label

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


Luminaire		Measur.		Lamp		
Code	05-1547	Code	05-1547	Code	Wall Washer 24W	
Name	Wall Washer 24W	Name	Wall Washer 24W	Number	1	
Line	TRON	Date	16-09-2013	Position		
Efficiency	100.00%	Coordinate system	CG	Total Flux	1045.40 lm	
Maximum value	5570.98 cd	Position	C=15.00 G=0.00	Asymmetrical		
Rectangular Luminaire	Length	500 mm	Width	59 mm	Height	40 mm
Rectangular Luminous Area	Length	500 mm	Width	59 mm	Height	40 mm
Horizontal Luminous Area	0.029500 m2	Emitting area on Plane 180°		0.020000 m2		
Emitting area on Plane 0°	0.020000 m2	Emitting area on Plane 270°		0.002360 m2		
Emitting area on Plane 90°	0.002360 m2	Glare area at 76°		0.026543 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		90		
Measurement Distance	0.00	Measurement Flux		1045.40 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						




Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
IESNA-2002	Wall Washer 24W	SMD /LED - 24.30 W	1045.40	24.30	1	
C.I.E.	95 98 100 100 100	D DIN 5040		A60		
F UTE	1.00 A	B NBN		BZ 1		

500mm x 59mm



ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

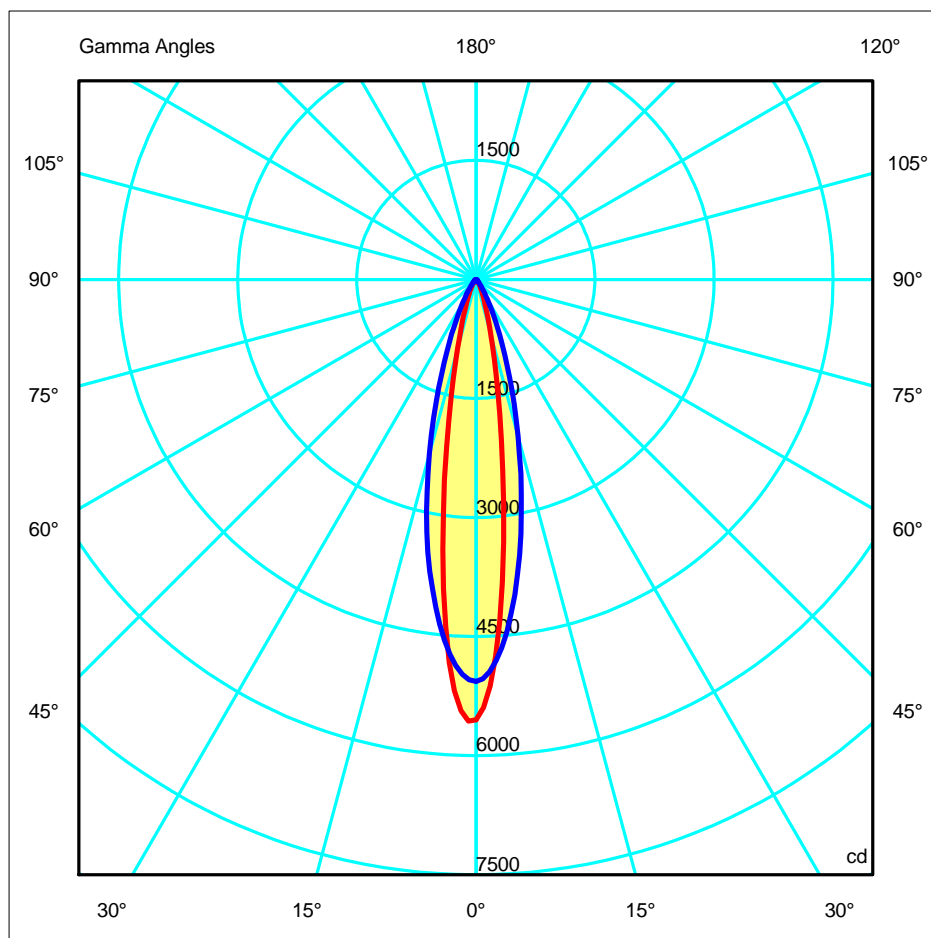

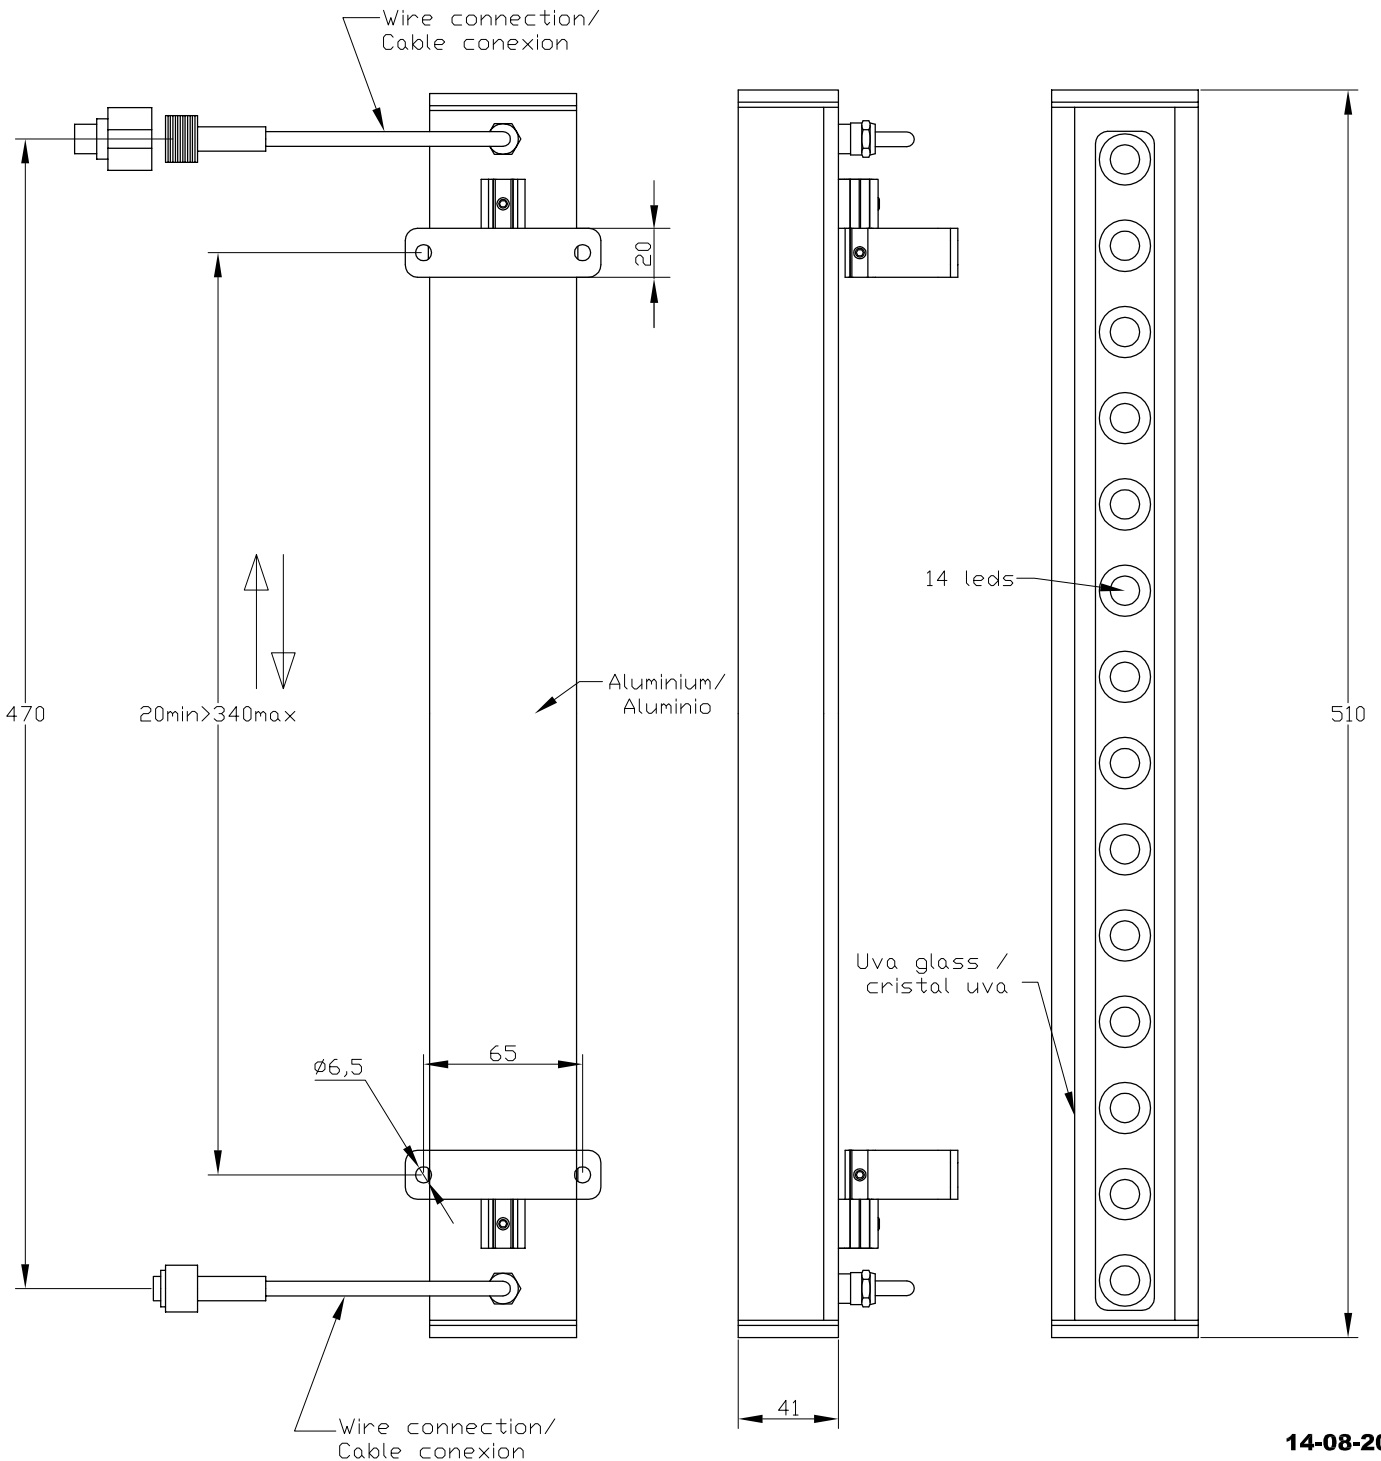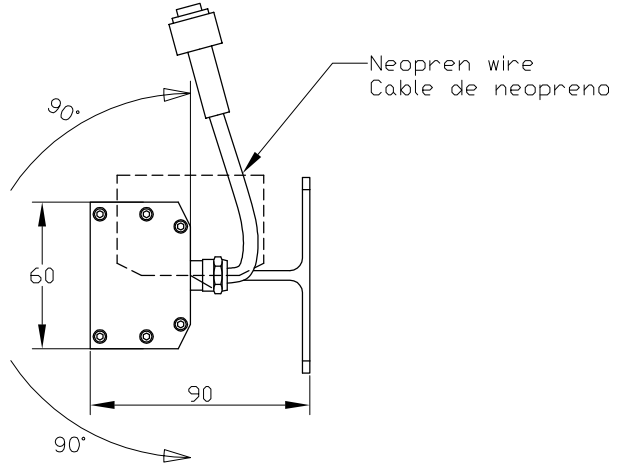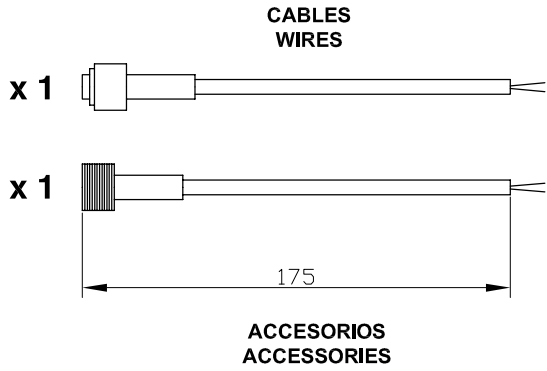



GUIA INSTALACIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-1549-54-H6 / 05-1546-54-H6 - NEUTRAL WHITE








05-1552-54-H6 / 05-1547-54-H6 - WARM WHITE

05-1544-54/H6 / 05-1548-54-H6 - RGB

LEDS-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

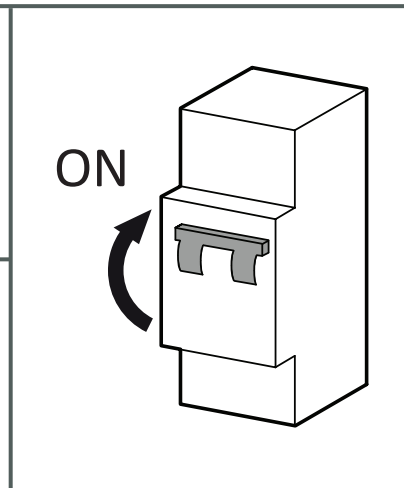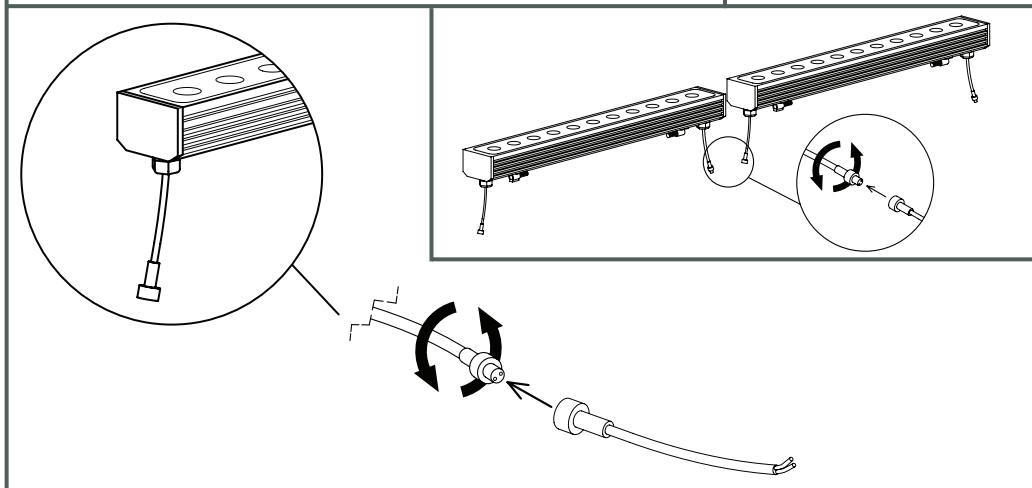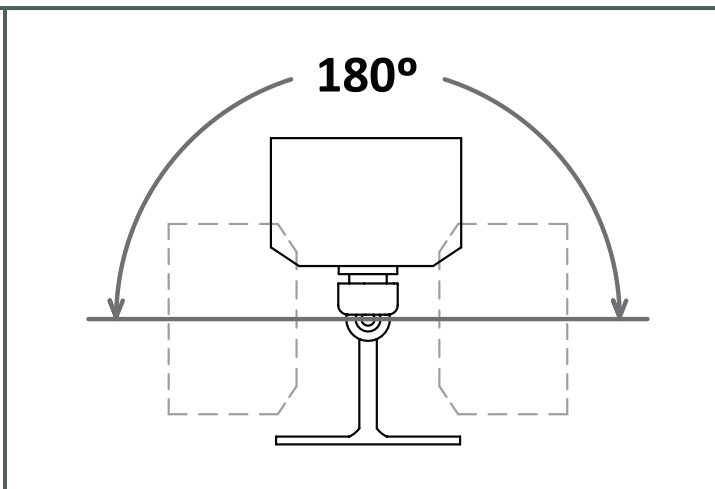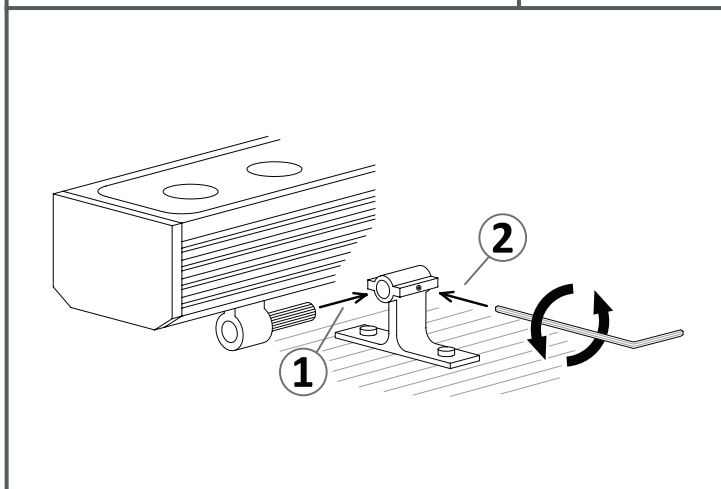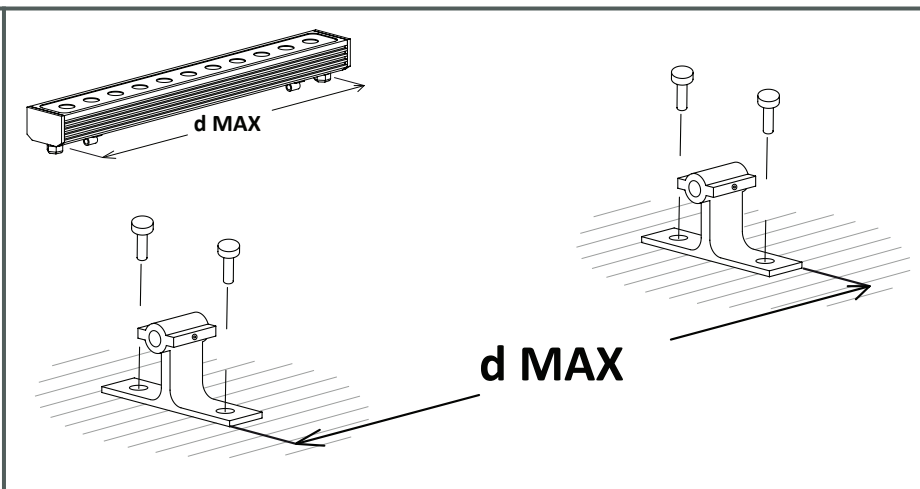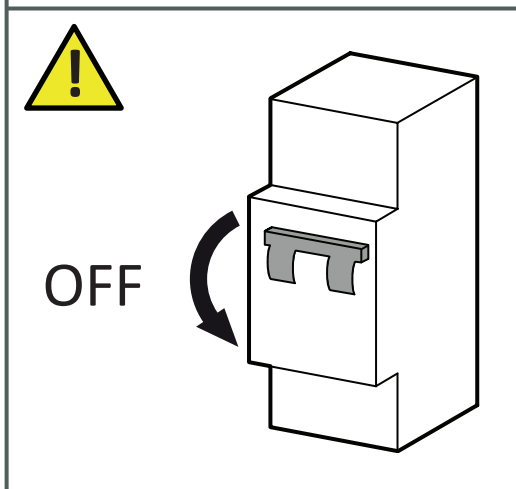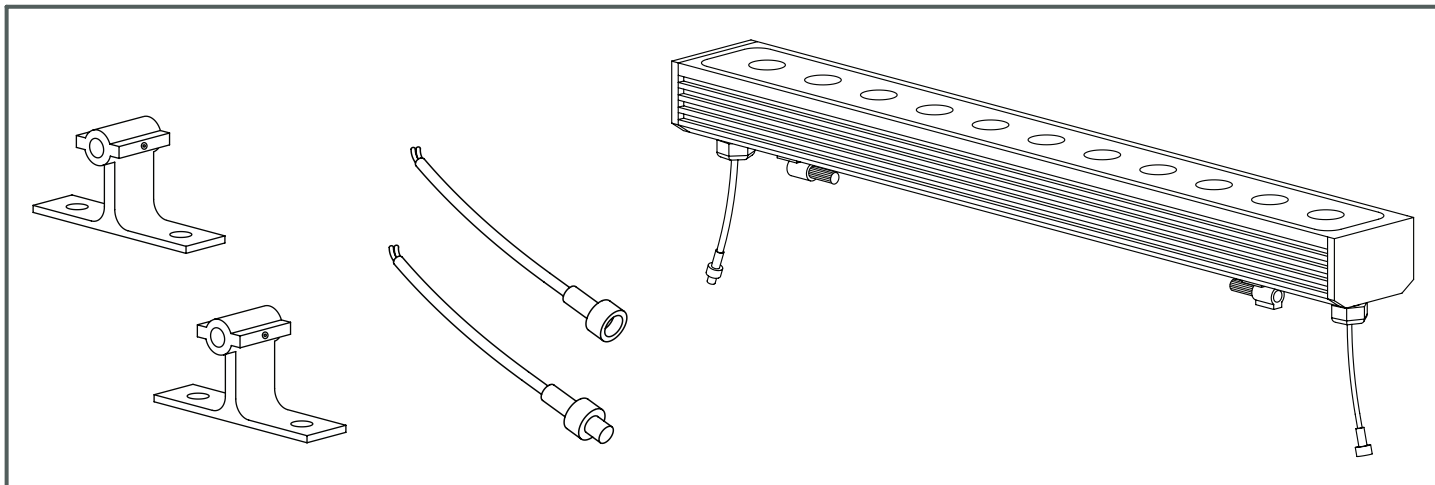

PS
24VDC

71-0038-00-00 - 26,4 W
 71-0039-00-00 - 52,8 W
 71-0063-00-00 - 76,8 W
 71-0064-00-00 - 156 W
 71-0065-00-00 - 240 W
 71-0066-00-00 - 312 W
 71-4727-00-00 - 150 W (IP67)

C
DALI

71-3473-00-00 - 120 W

C
WHITE

71-0017-00-00 - 288 W

C
DMX

71-3493-00-00
 - 4x48W (R,G,B,W)
 - 3x48W (R,G,B)

C
RGB

71-0019-00-00 - 432 W

A

71-3433-00-00 - 288 W
 71-1553-00-00 - 288 W

C
1-10V

71-0727-00-00 - 312 W

C
RGB


71-4662-00-00 - 432 W
 71-4663-00-00 - 432 W (IP65)
 71-4666-00-00 - REMOTE (OPTIONAL)

WHITE


05-1549-54-H6 / 05-1552-54-H6 (1,0 mt - 48W)

05-1546-54-H6 / 05-1547-54-H6 (0,5 mt - 24W)


ON / OFF

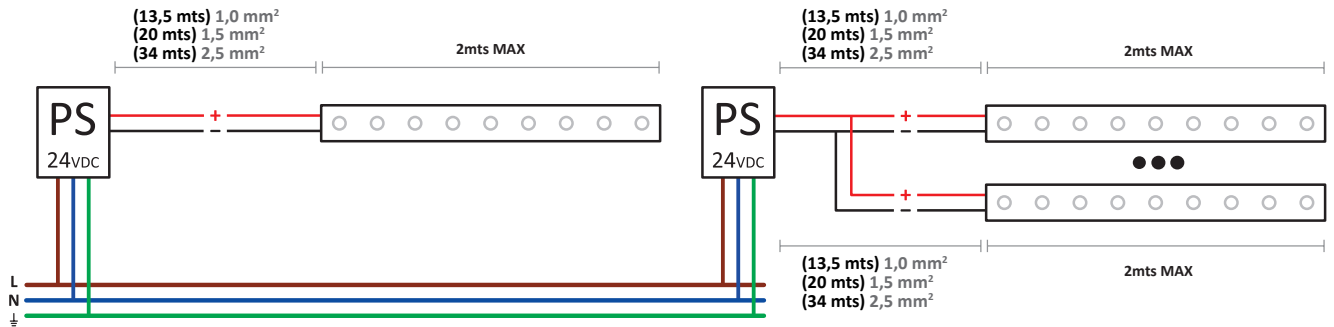


DIMMING WITH REMOTE CONTROL

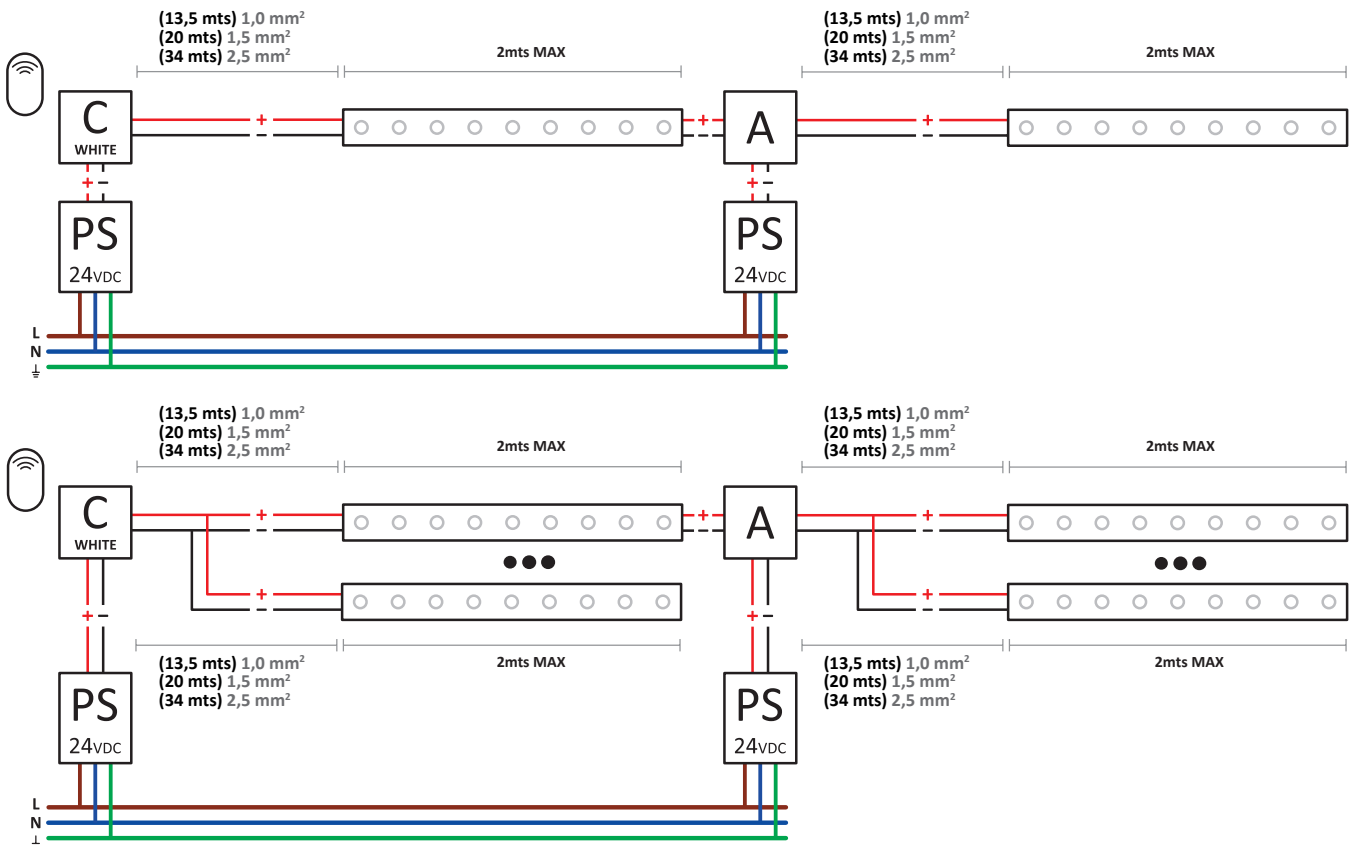

1-10V

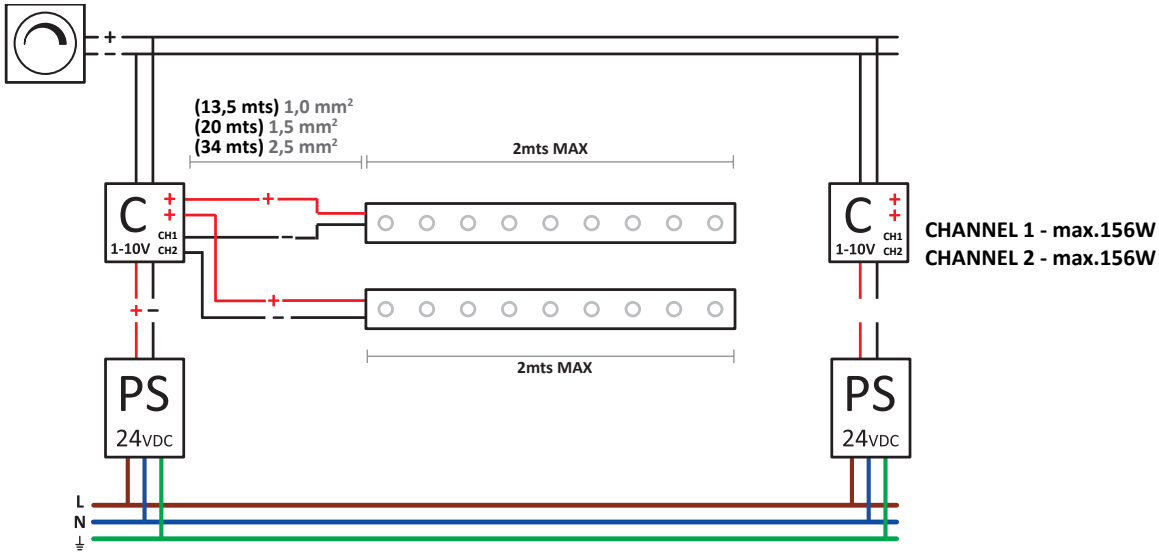

DALI

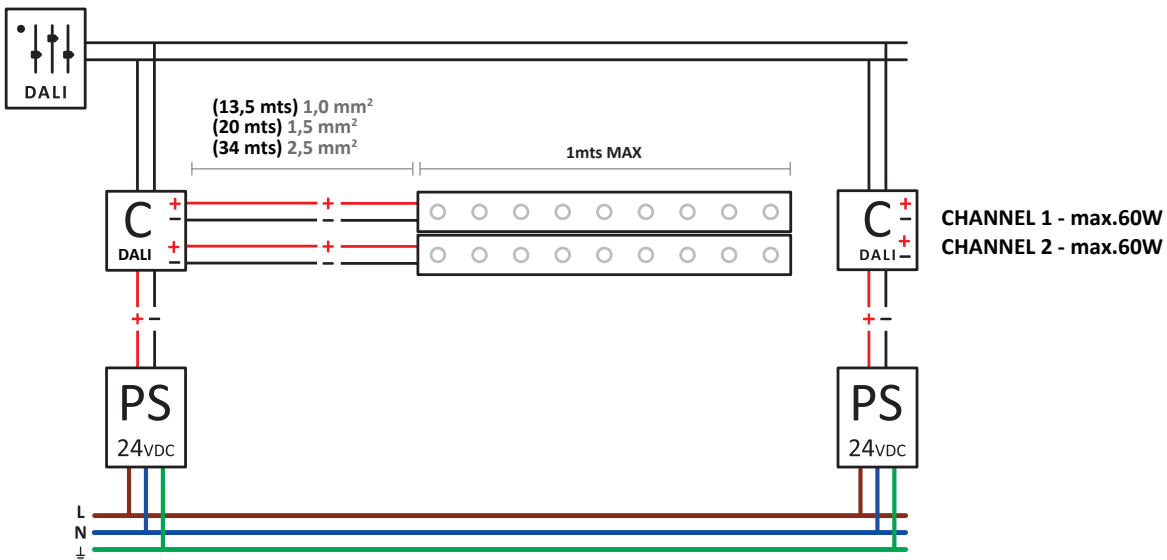



RGB

05-1548-54-H6 (1,0 mt - 60W)

05-1544-54-H6 (0,5 mt - 30W)

RGB CONTROL WITH / WITHOUT REMOTE CONTROL

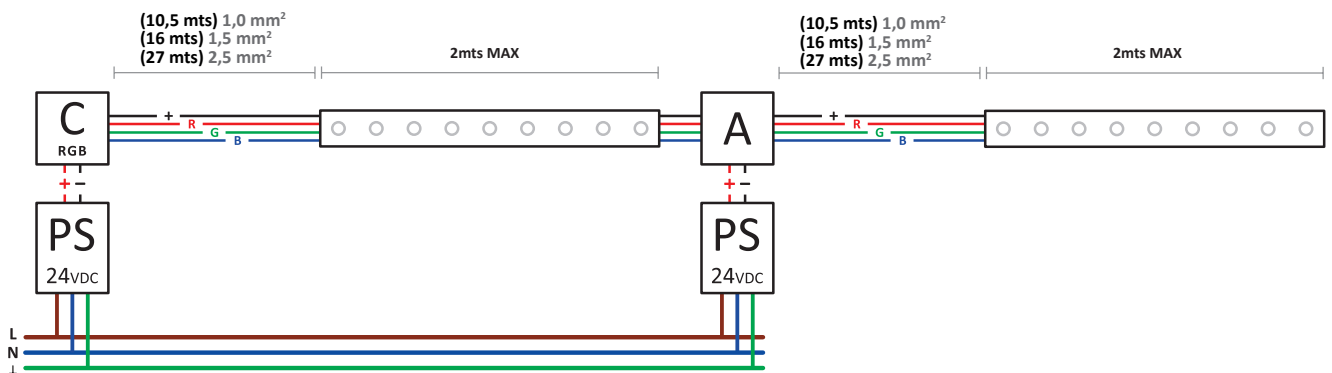

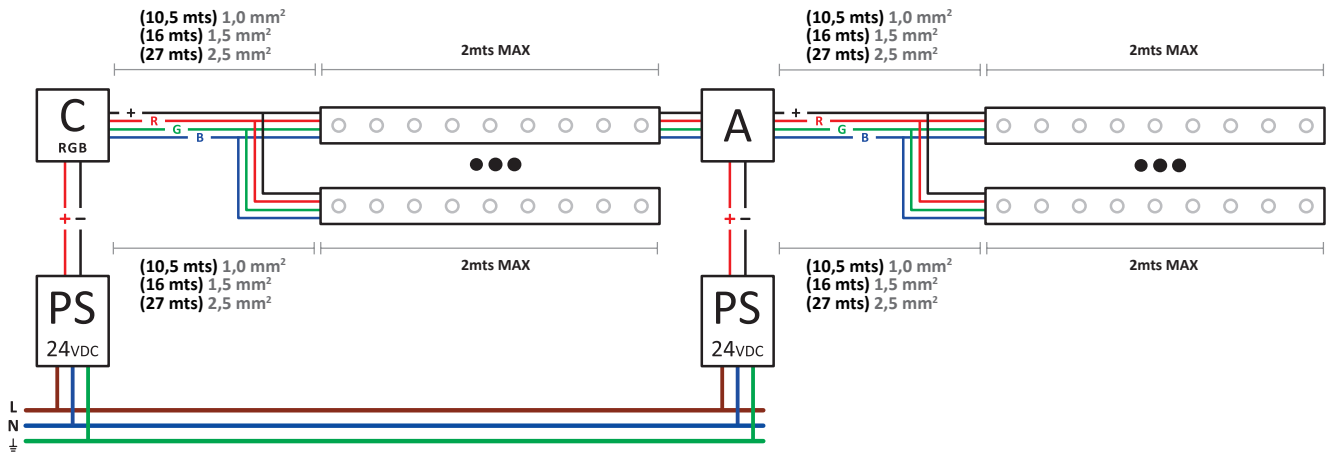

DMX

