


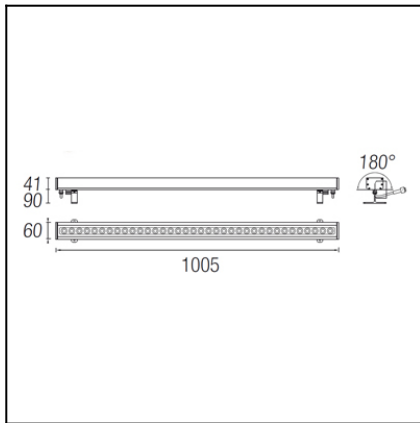


The photograph may not match the reference exactly. Please read the product description to identify the finish.


TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable:	Adjustable $\pm 90^\circ$ on the vertical axis
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Light source 1:	36 x LED Cree 60W Led RGB 2500 lm ^(N)
Angle of the optics / Reflector:	15x50°
Voltage / Frequency:	24 VDC
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	9
Net Weight (Kg):	2.185
EAN:	8435381408688

Download photometric file .ldt /.ies

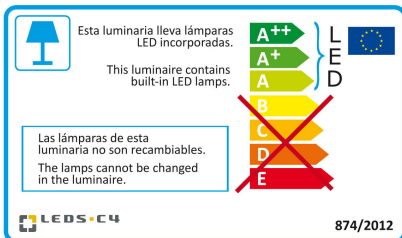

Click on image to download energy label


MATERIALS / FINISHES

Structure material:	Aluminium	Diffuser material:	UVA glass
Structure finish:	Anodized	Diffuser finish:	Transparent

GEAR



Necessary equipment not included. For more information check website / catalogs / sales organization.

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


Luminaire		Measur.		Lamp		
Code	05-1548-54-H6	Code	05-1548-54-H6	Code	05-1548-54-H6	
Name	Aplique TRON 36 leds RGB 60W	Name	Aplique TRON 36 leds RGB 60W	Number	1	
Line	- LEDS C4 LEDS	Date	20-11-2013	Position	Universal	
Efficiency	100.00%	Coordinate system	CG	Total Flux	1595.52 lm	
Maximum value	7137.06 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	1000 mm	Width	60 mm	Height	42 mm
Rectangular Luminous Area	Length	960 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area	0.019200 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.004645 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90			
Measurement Distance	6.44	Measurement Flux	1595.52 lm			
Operator	Asselum T2	Source voltage	230.00 V			
Temperature	20.00 °C	Source current	PRC			
Humidity	47.00 %	Photocell				
Notes						


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
- LEDS C4 LEDS	05-1548-54-H6	Lámpara leds RGB 60W	1595.52	60.00	1	
C.I.E.	95 98 100 100 100	D DIN 5040	A60			
F UTE	1.00 A	B NBN	BZ 1			

1000mm x 60mm






ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

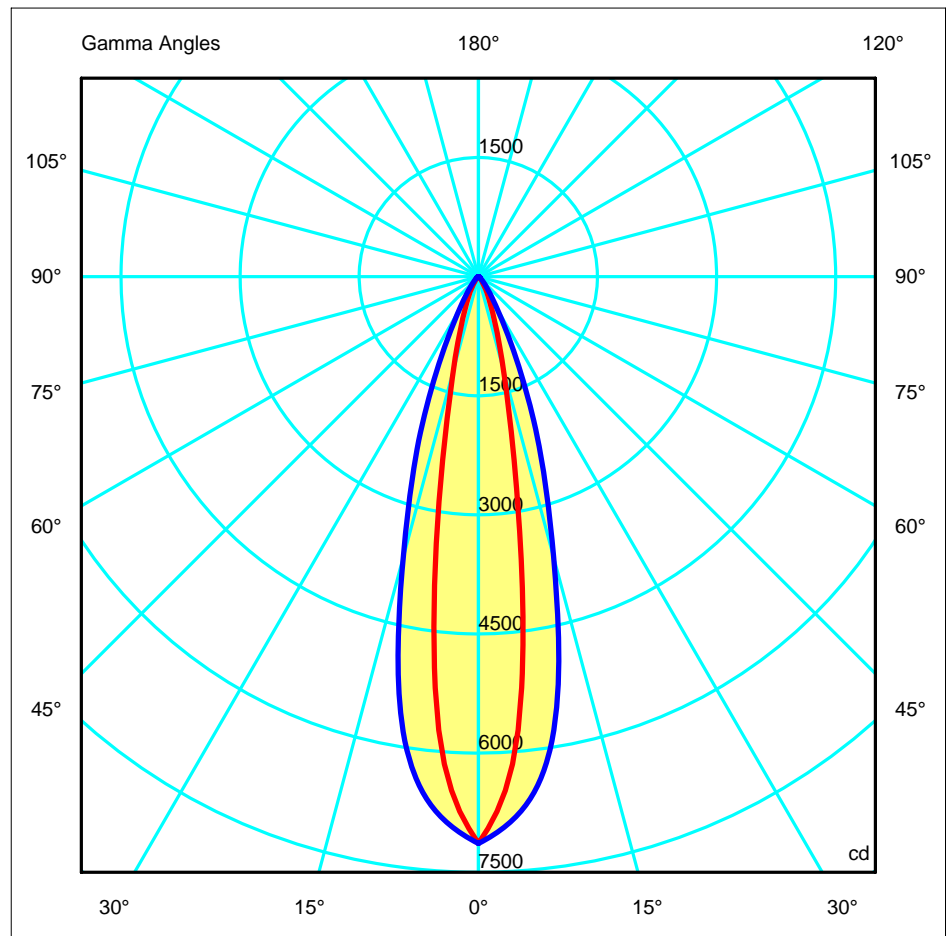



ACCESORIOS
ACCESSORIES

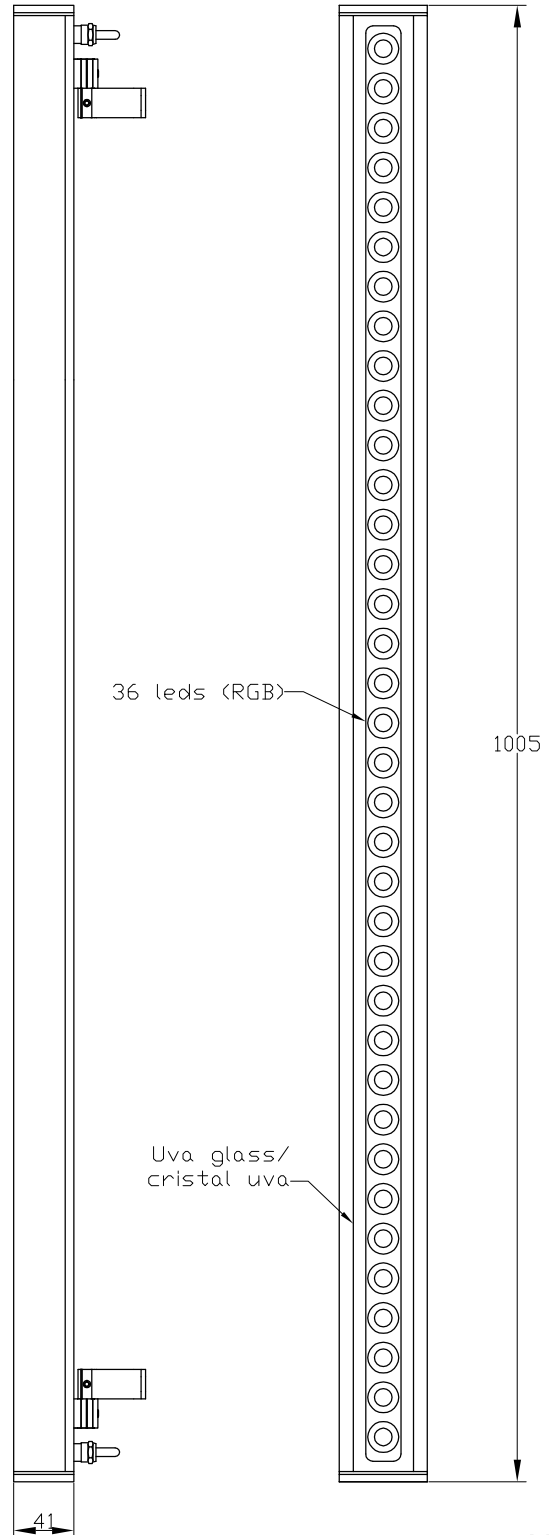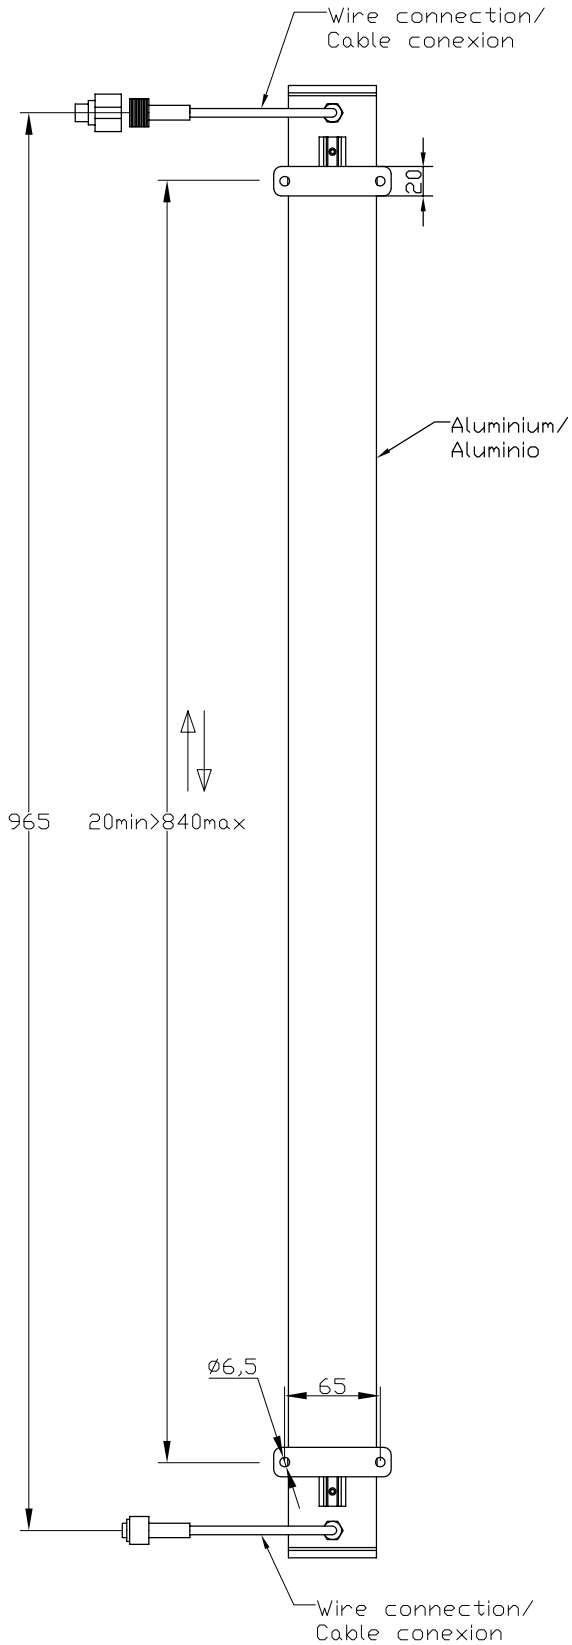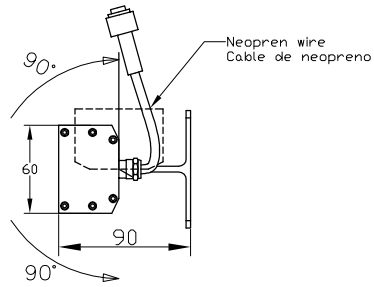



GUIA INSTALCIÓN SERIE TRON
INSTALLATION GUIDE TRON SERIES
INSTALLATIONSANLEITUNG SERIE TRON
GUIDE D'INSTALLATION SÉRIE TRON
GUIDA DI INSTALLAZIONE SERIE TRON

05-1549-54-H6 / 05-1546-54-H6 - NEUTRAL WHITE









05-1552-54-H6 / 05-1547-54-H6 - WARM WHITE

05-1544-54/H6 / 05-1548-54-H6 - RGB

LEDS-C4 S.A.
CIF A-59410910

Afores, s/n
25750 Torà · Lleida · Spain
T +34 973 46 81 00
F +34 973 46 81 06
e-mail: leds-c4@leds-c4.com

WWW.LEDS-C4.COM

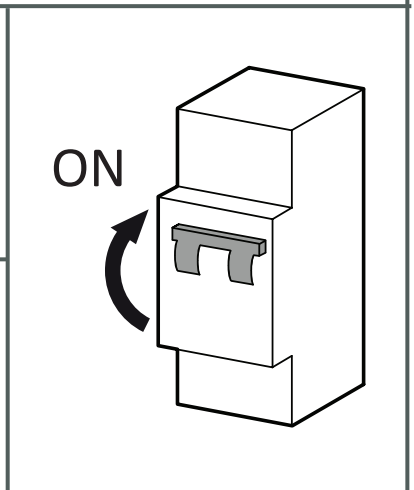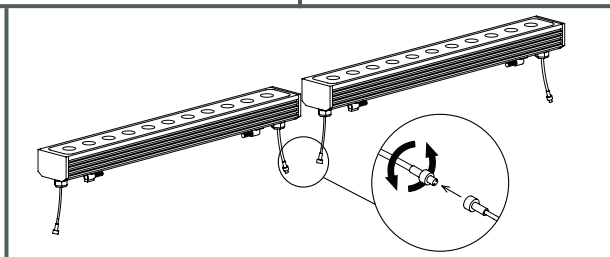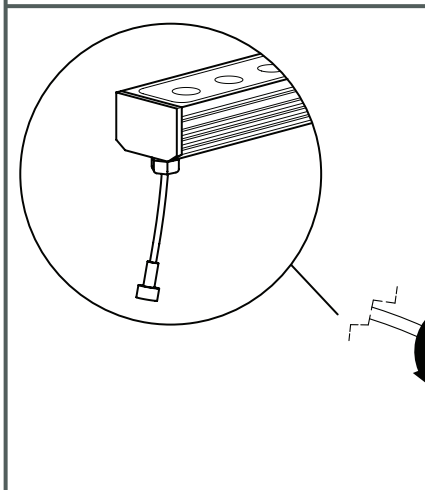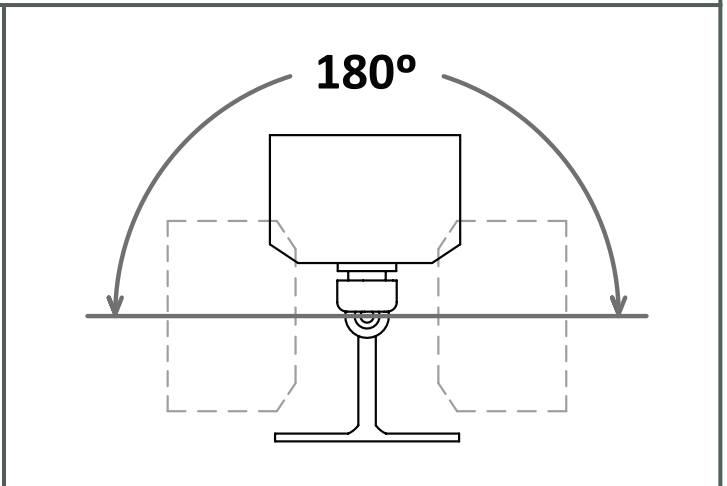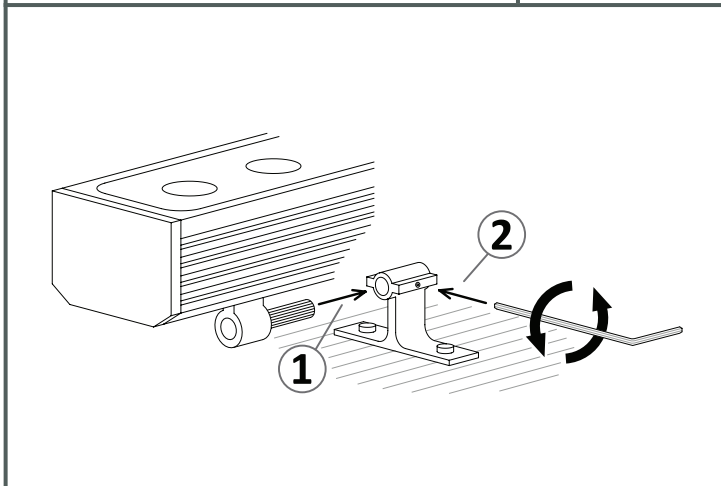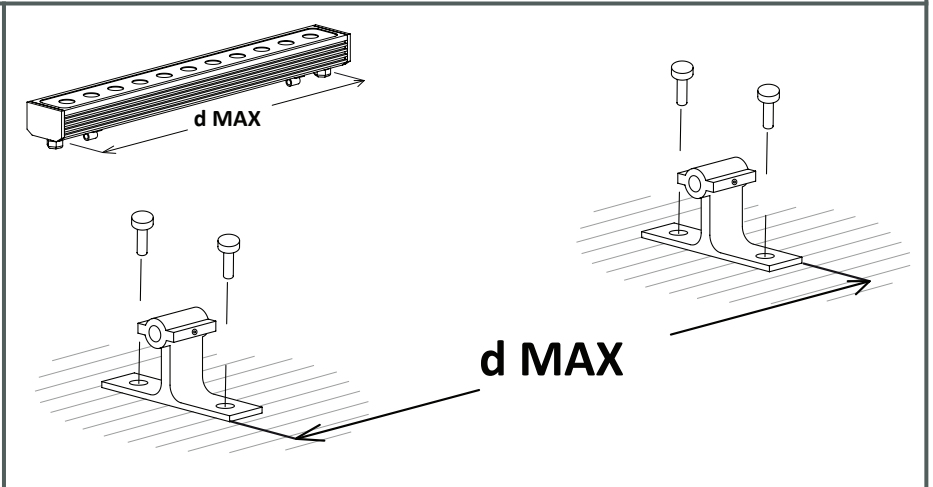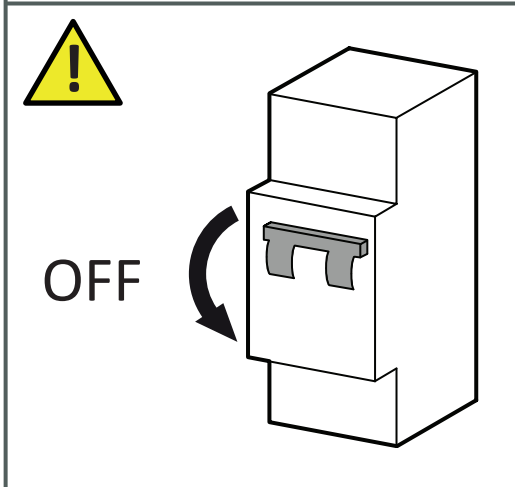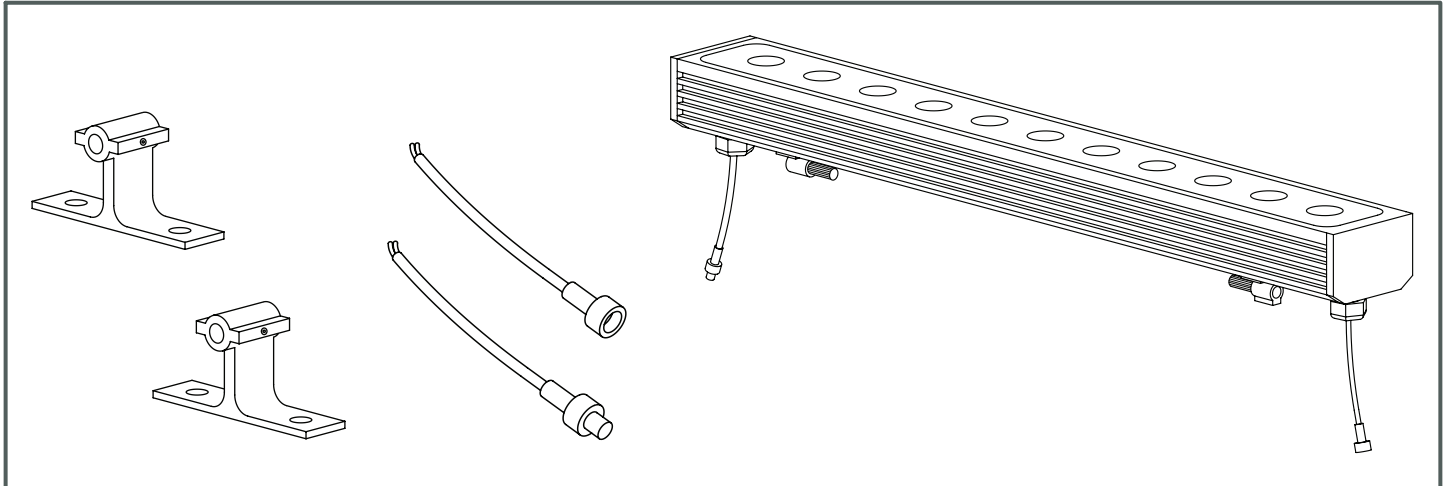

PS
24VDC

71-0038-00-00 - 26,4 W
 71-0039-00-00 - 52,8 W
 71-0063-00-00 - 76,8 W
 71-0064-00-00 - 156 W
 71-0065-00-00 - 240 W
 71-0066-00-00 - 312 W
 71-4727-00-00 - 150 W (IP67)

C
DALI

71-3473-00-00 - 120 W

C
WHITE

71-0017-00-00 - 288 W

C
DMX

71-3493-00-00
 - 4x48W (R,G,B,W)
 - 3x48W (R,G,B)

C
RGB

71-0019-00-00 - 432 W

A

71-3433-00-00 - 288 W
 71-1553-00-00 - 288 W

C
1-10V

71-0727-00-00 - 312 W

C
RGB


71-4662-00-00 - 432 W
 71-4663-00-00 - 432 W (IP65)
 71-4666-00-00 - REMOTE (OPTIONAL)

WHITE


05-1549-54-H6 / 05-1552-54-H6 (1,0 mt - 48W)

05-1546-54-H6 / 05-1547-54-H6 (0,5 mt - 24W)


ON / OFF

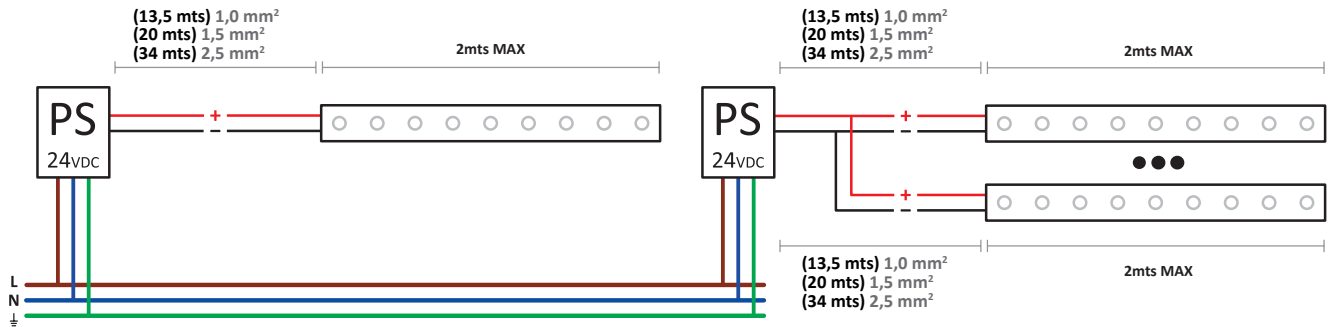


DIMMING WITH REMOTE CONTROL

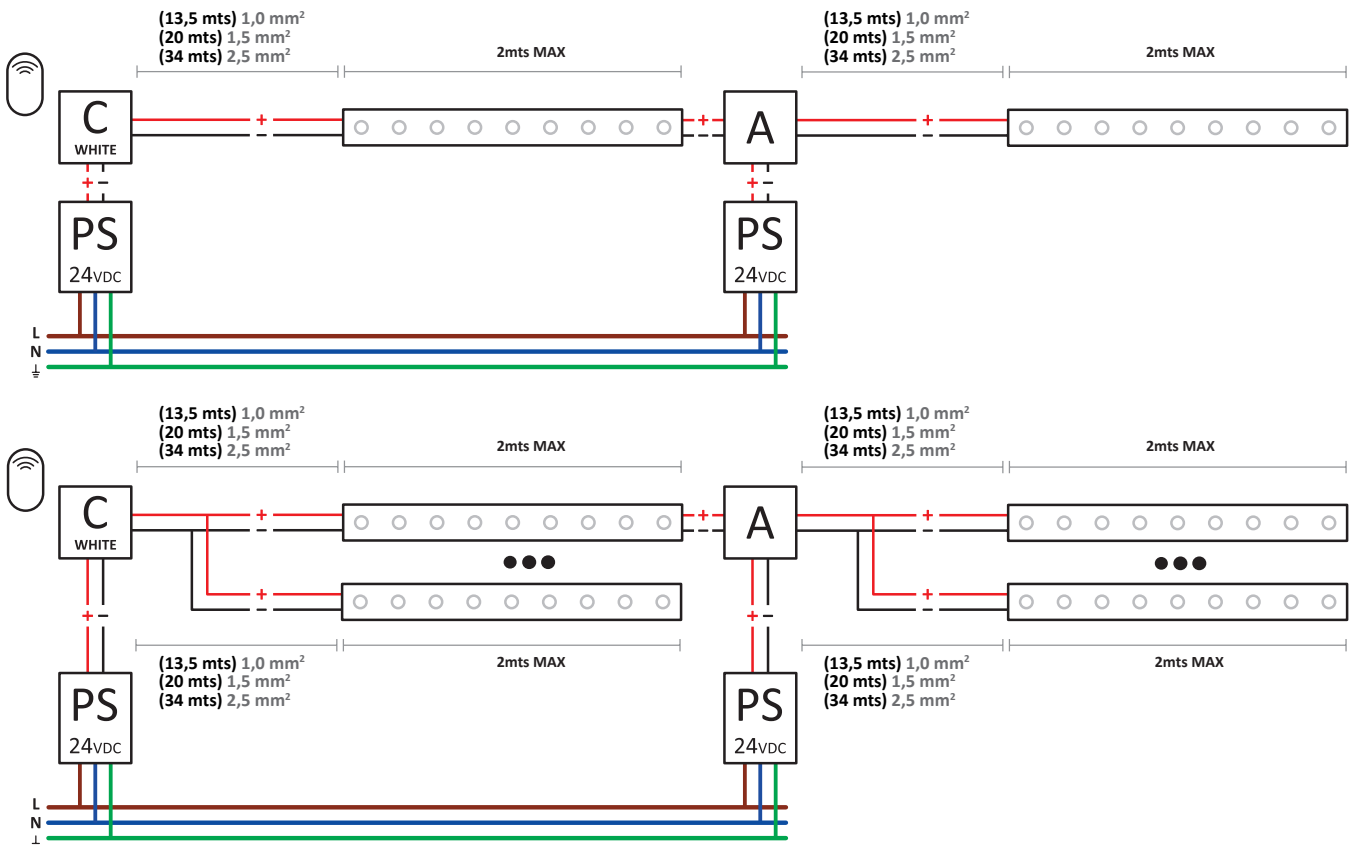

1-10V

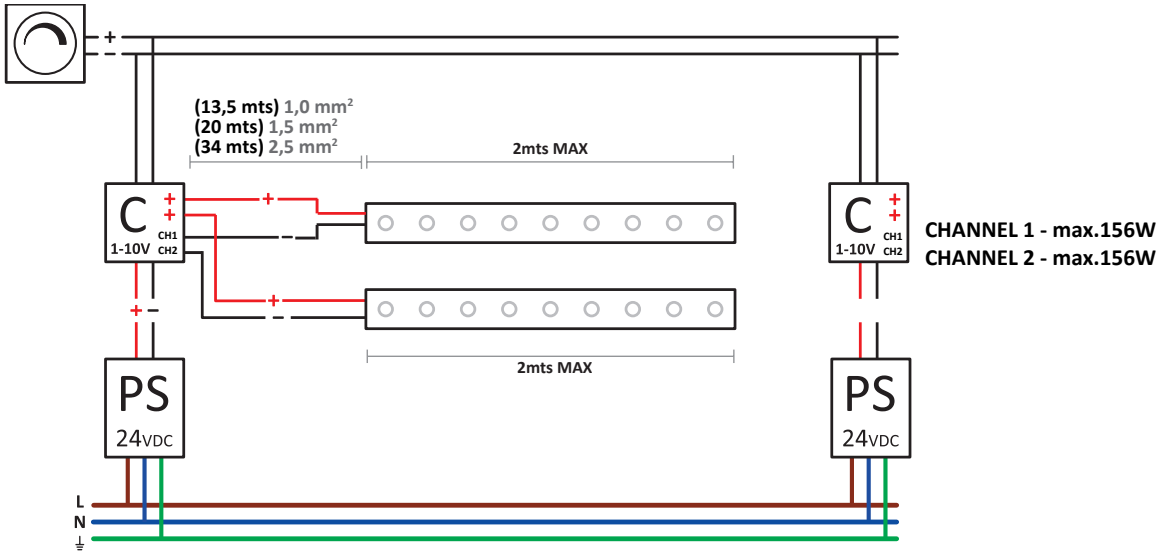

DALI

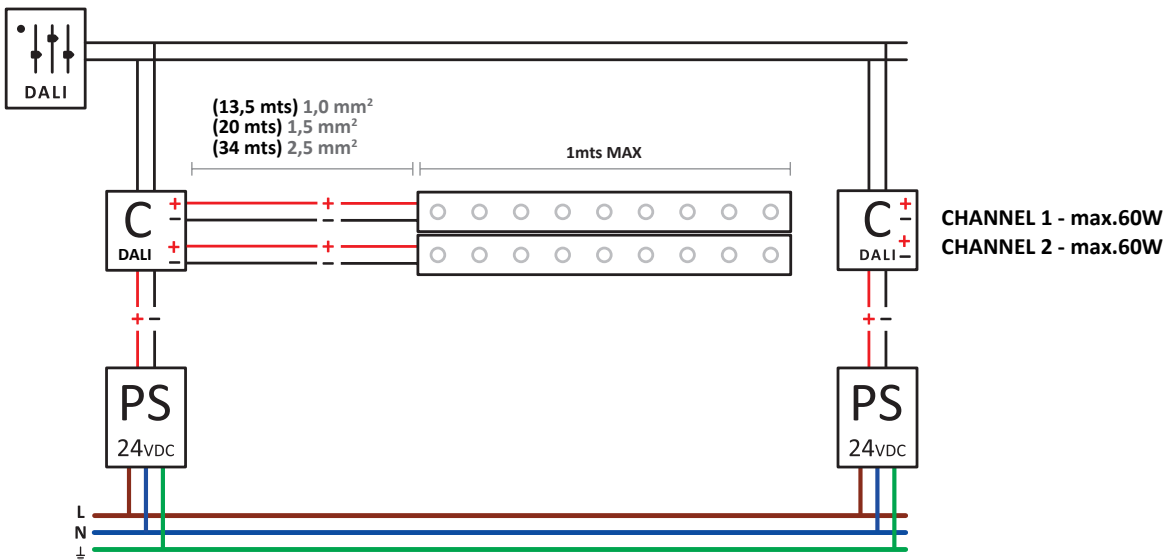



RGB

05-1548-54-H6 (1,0 mt - 60W)

05-1544-54-H6 (0,5 mt - 30W)

RGB CONTROL WITH / WITHOUT REMOTE CONTROL

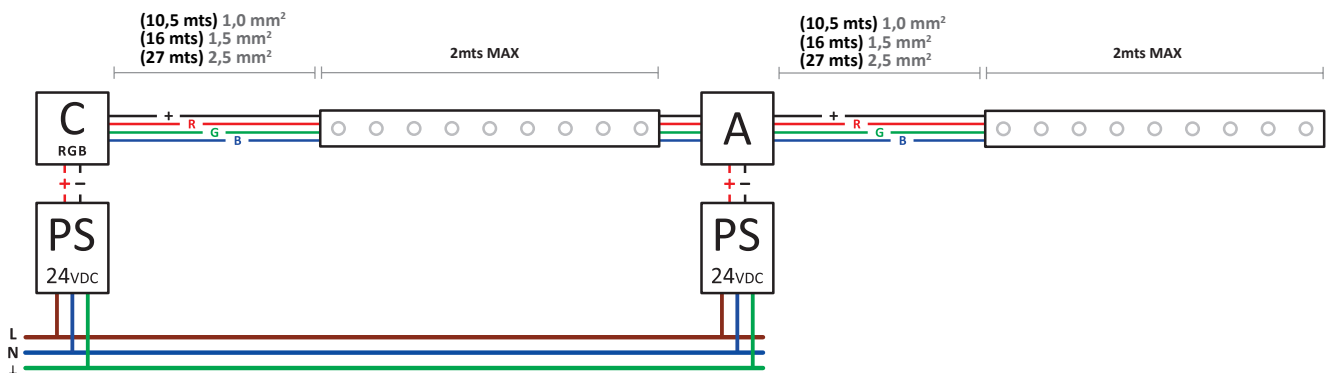

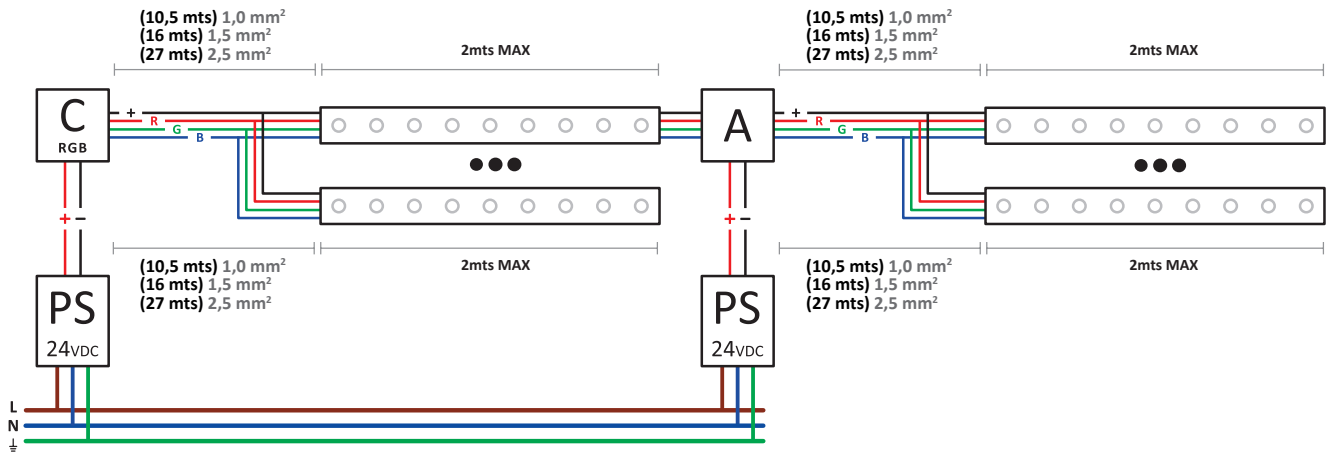

DMX

