



The photograph may not match the reference exactly. Please read the product description to identify the finish.

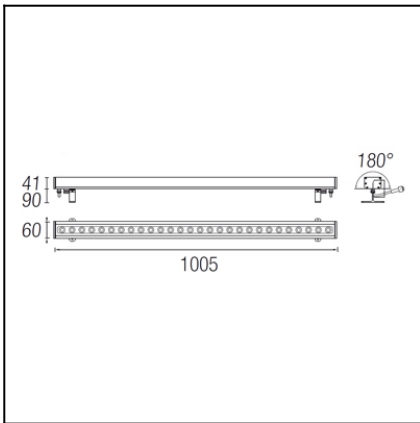

**TECHNICAL CHARACTERISTICS**

Type:	Spotlight
Adjustable:	Adjustable $\pm 90^\circ$ on the vertical axis
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Light source 1:	28 x LED Cree 48W Neutral white - 4000K 4000 lm <sup>(N)</sup> CRI 80
Angle of the optics / Reflector:	15x50°
Voltage / Frequency:	24 VDC
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	9
Net Weight (Kg):	2.185
EAN:	8435381402235


LED 48W

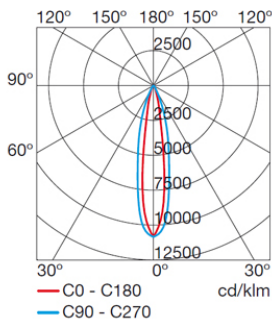

**MATERIALS / FINISHES**

<b>Structure material:</b>	Aluminium	<b>Diffuser material:</b>	UVA glass
<b>Structure finish:</b>	Anodized	<b>Diffuser finish:</b>	Transparent

Download photometric file .ldt /.ies

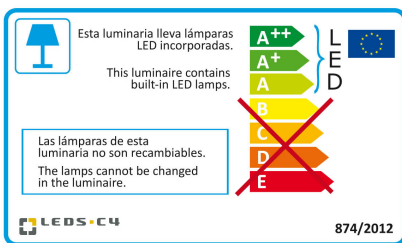

Click on image to download energy label

**GEAR**



Necessary equipment not included. For more information check website / catalogs / sales organization.

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>		
Code	05-1549	Code	05-1549	Code	05-1549	
Name	Aplique TRON leds 48W	Name	Aplique TRON leds 48W	Number	1	
Line	Eulumdat	Date	16-05-2013	Position		
Efficiency	100.00%	Coordinate system	CG	Total Flux	2715.00 lm	
Maximum value	14893.06 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	1005 mm	Width	72 mm	Height	41 mm
Rectangular Luminous Area	Length	955 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area	0.019100 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.004621 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1980.70 lm		
Operator	Asselum T2	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	05-1549	05-1549 - 48.00 W	2715.00	48.00	1	
C.I.E.	94 98 100 100 100	D DIN 5040		A60		
F UTE	1.00 A	B NBN		BZ 1		

1005mm x 72mm






ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

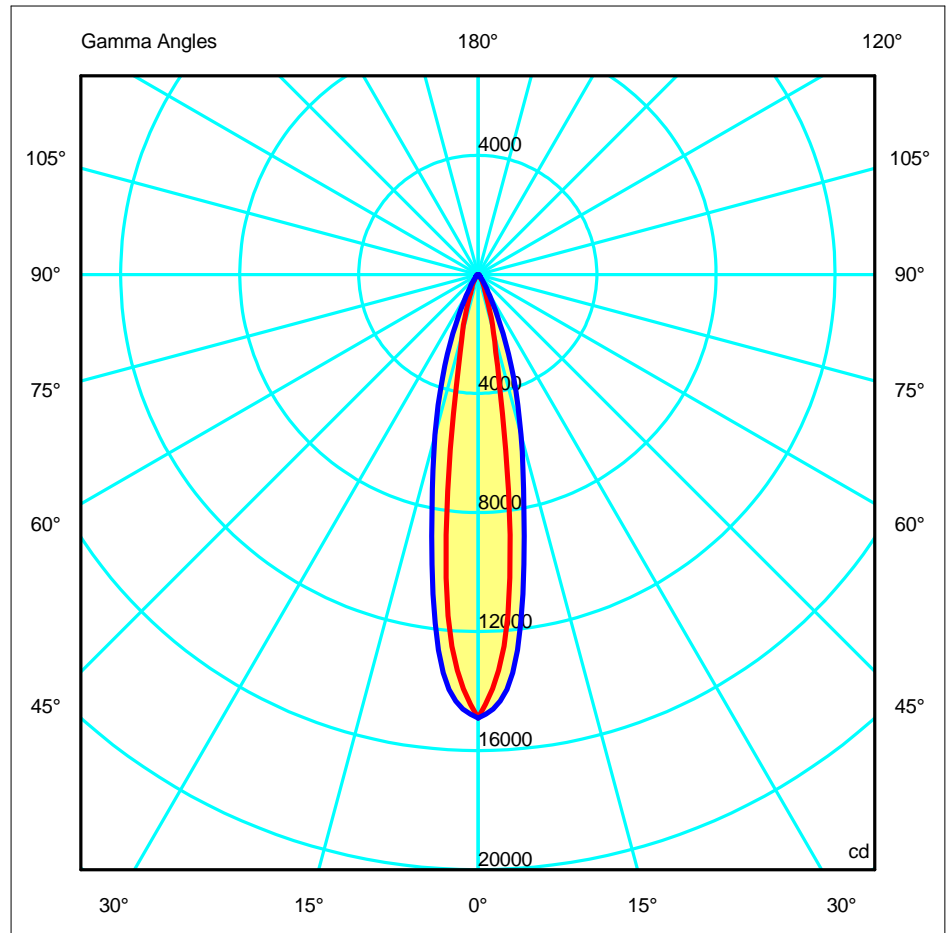

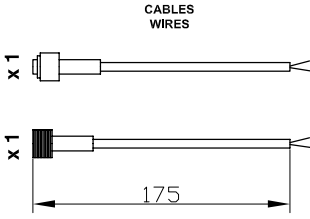

**ACCESORIOS**  
**ACCESSORIES**

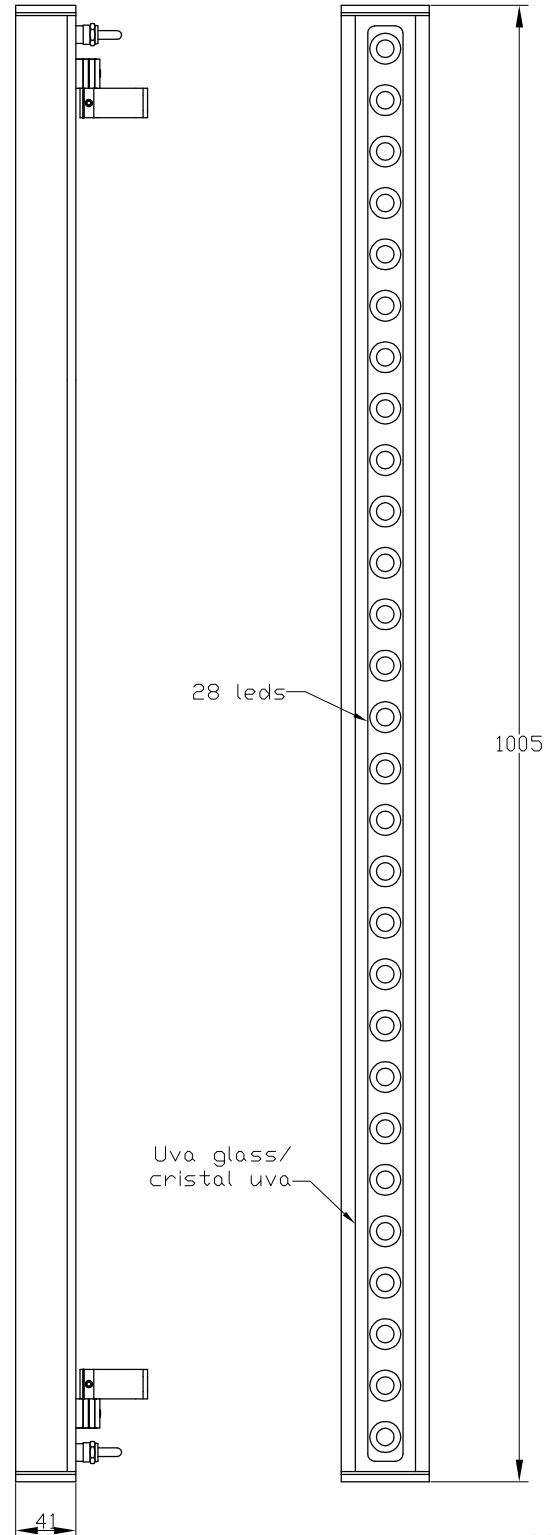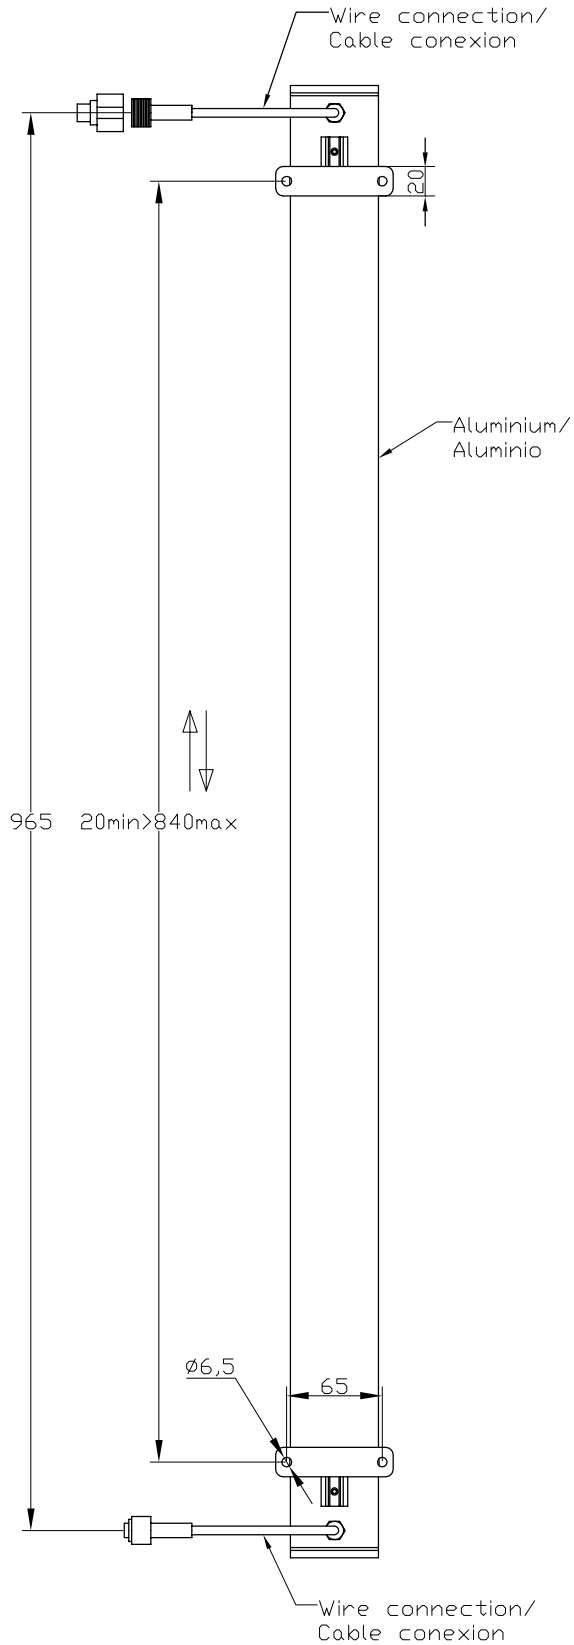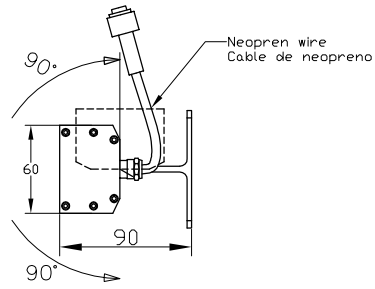



**GUIA INSTALCIÓN SERIE TRON**  
**INSTALLATION GUIDE TRON SERIES**  
**INSTALLATIONSANLEITUNG SERIE TRON**  
**GUIDE D'INSTALLATION SÉRIE TRON**  
**GUIDA DI INSTALLAZIONE SERIE TRON**

**05-1549-54-H6 / 05-1546-54-H6 - NEUTRAL WHITE**








**05-1552-54-H6 / 05-1547-54-H6 - WARM WHITE**

**05-1544-54/H6 / 05-1548-54-H6 - RGB**

**LEDS-C4 S.A.**  
**CIF A-59410910**

**Afores, s/n**  
**25750 Torà · Lleida · Spain**  
**T +34 973 46 81 00**  
**F +34 973 46 81 06**  
**e-mail: leds-c4@leds-c4.com**

**WWW.LEDS-C4.COM**

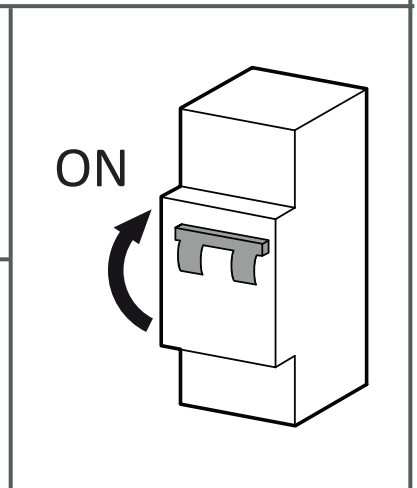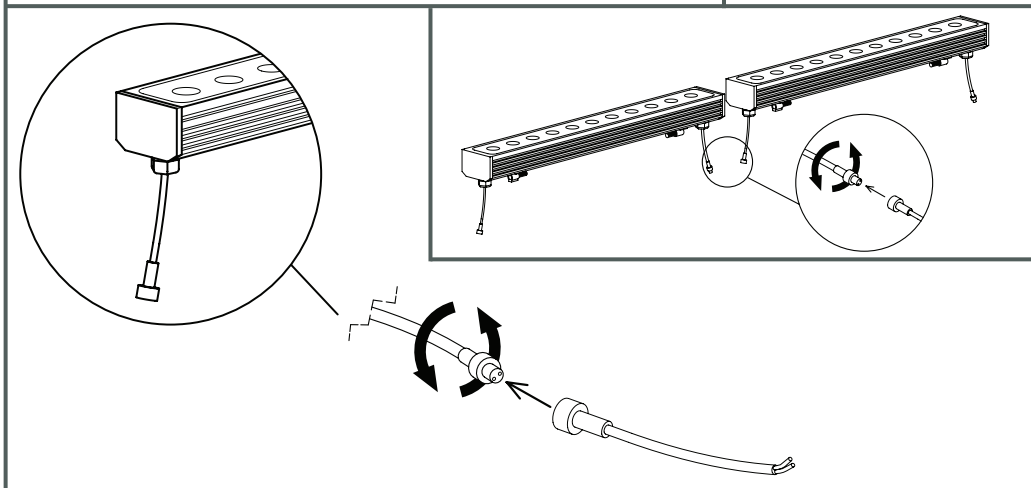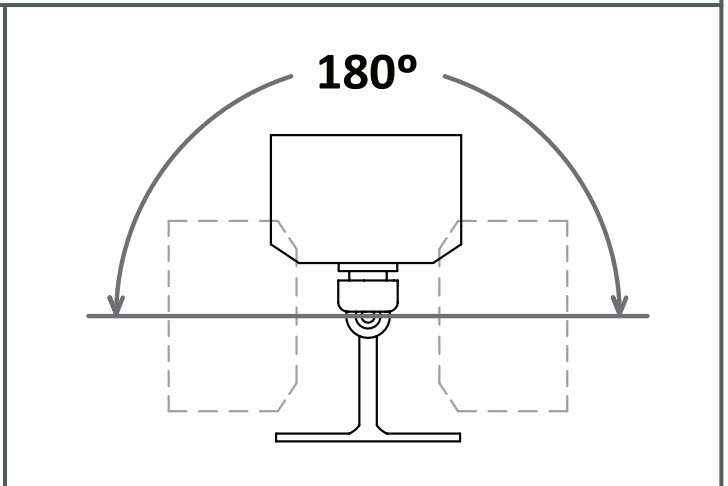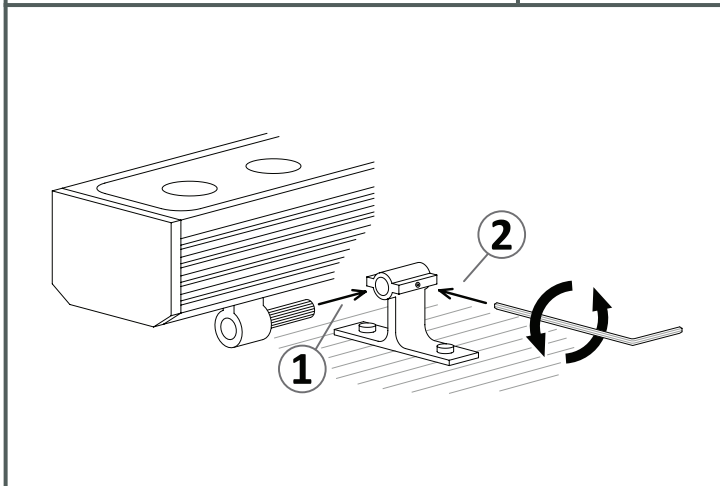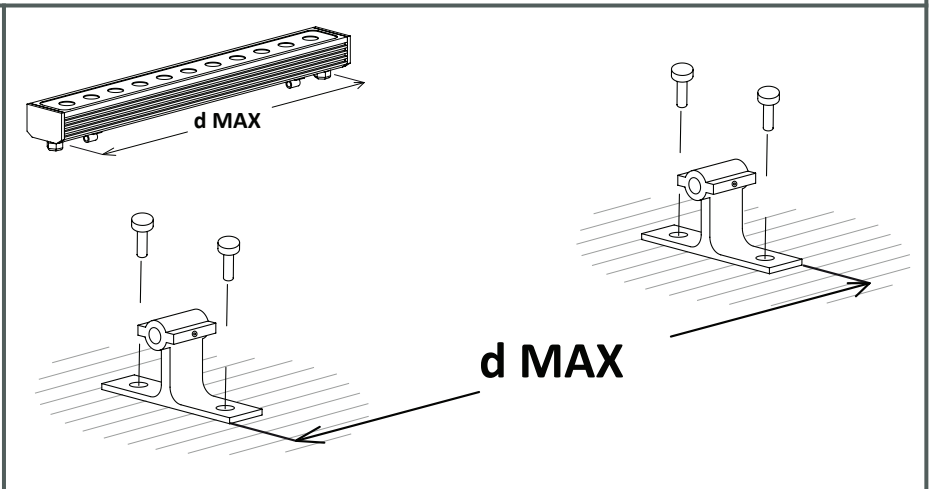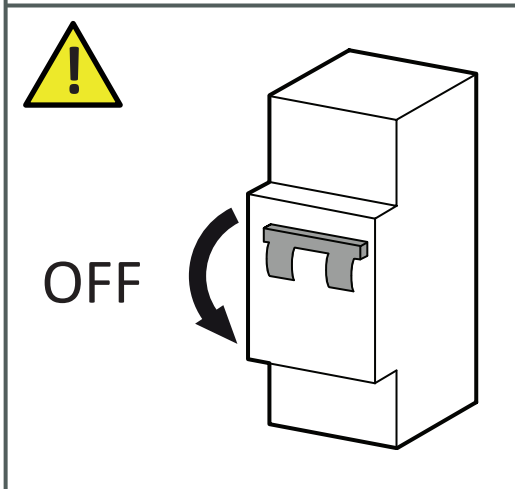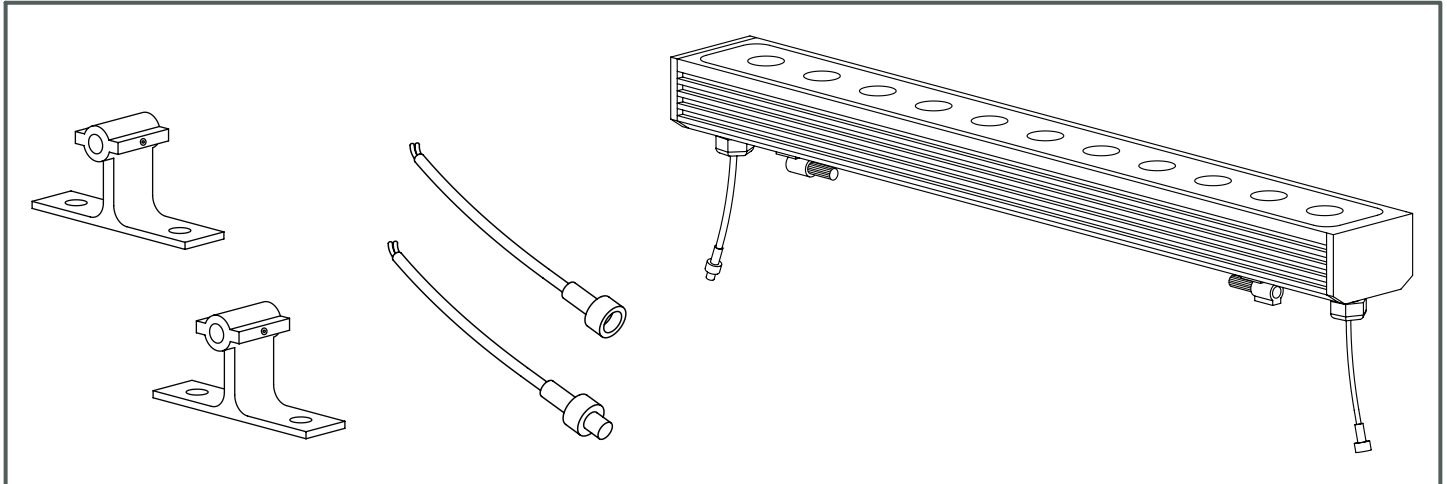

**PS**  
24VDC

71-0038-00-00 - 26,4 W  
 71-0039-00-00 - 52,8 W  
 71-0063-00-00 - 76,8 W  
 71-0064-00-00 - 156 W  
 71-0065-00-00 - 240 W  
 71-0066-00-00 - 312 W  
 71-4727-00-00 - 150 W (IP67)

**C**  
DALI

71-3473-00-00 - 120 W

**C**  
WHITE

71-0017-00-00 - 288 W

**C**  
DMX

71-3493-00-00  
 - 4x48W (R,G,B,W)  
 - 3x48W (R,G,B)

**C**  
RGB

71-0019-00-00 - 432 W

**A**

71-3433-00-00 - 288 W  
 71-1553-00-00 - 288 W

**C**  
1-10V

71-0727-00-00 - 312 W

**C**  
RGB


71-4662-00-00 - 432 W  
 71-4663-00-00 - 432 W (IP65)  
 71-4666-00-00 - REMOTE (OPTIONAL)

## WHITE


05-1549-54-H6 / 05-1552-54-H6 (1,0 mt - 48W)

05-1546-54-H6 / 05-1547-54-H6 (0,5 mt - 24W)


## ON / OFF

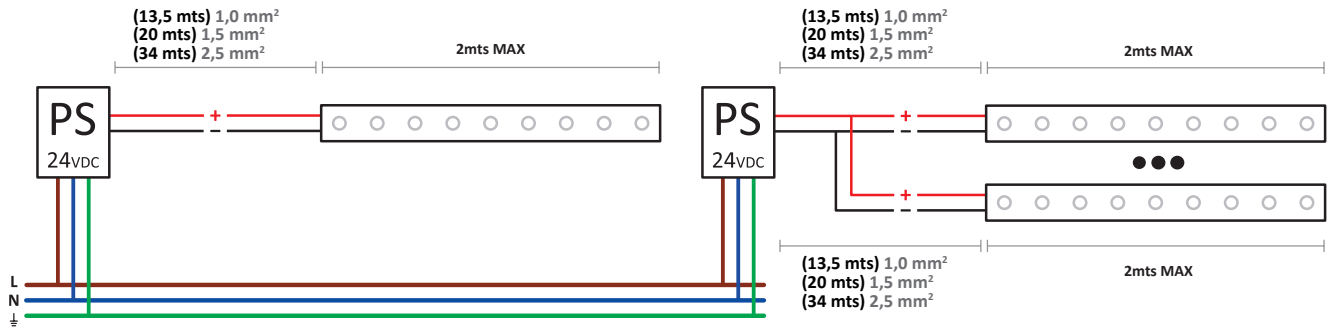


## DIMMING WITH REMOTE CONTROL

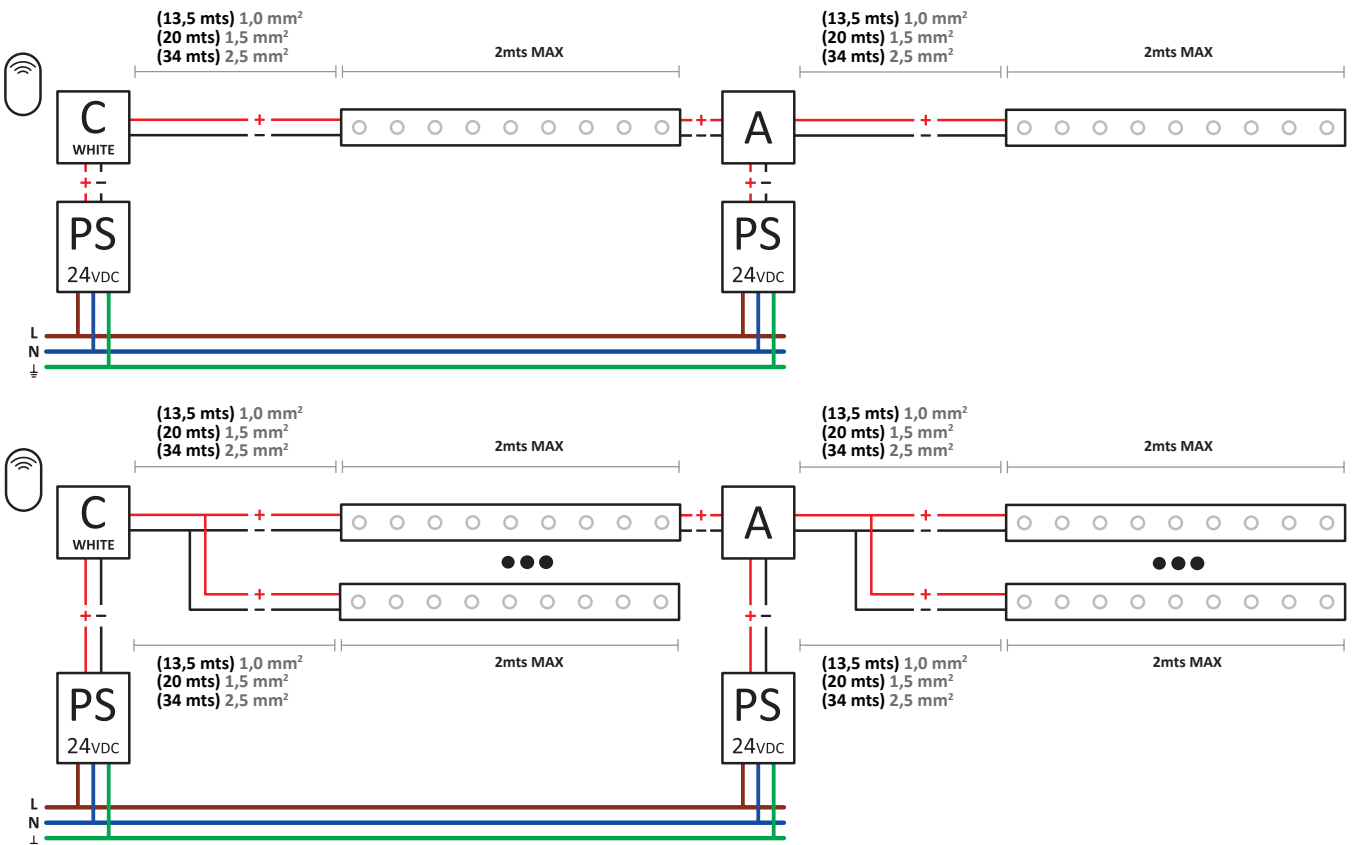

**1-10V**

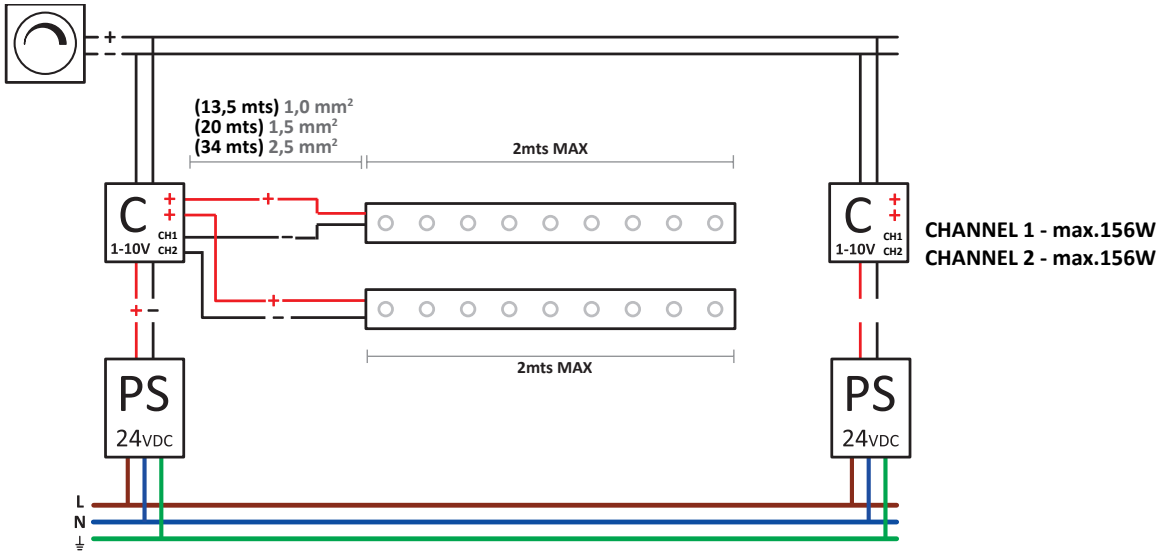

**DALI**

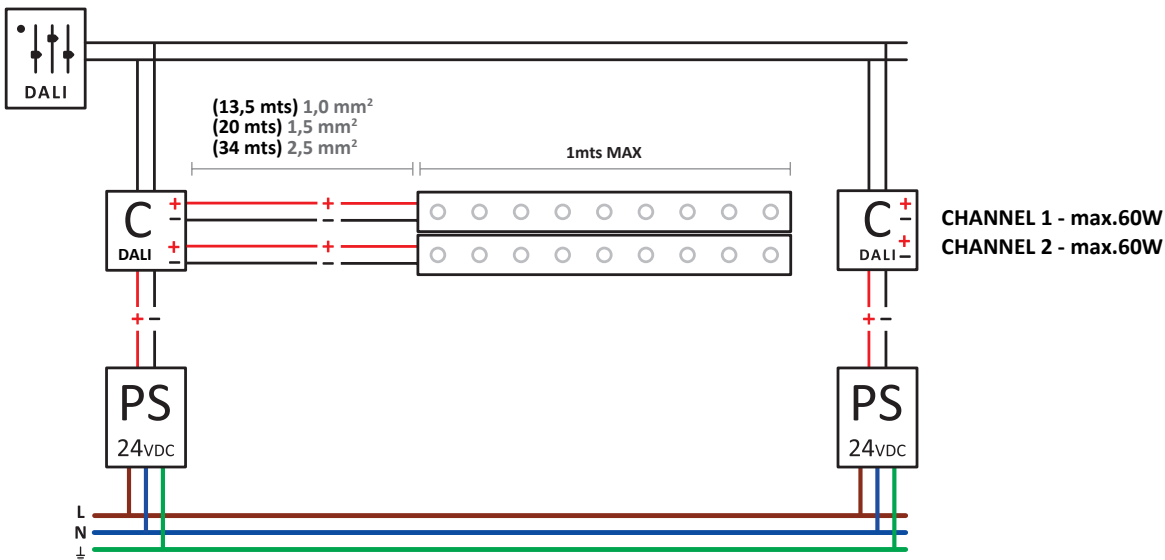



**RGB**

05-1548-54-H6 (1,0 mt - 60W)

05-1544-54-H6 (0,5 mt - 30W)

**RGB CONTROL WITH / WITHOUT REMOTE CONTROL**

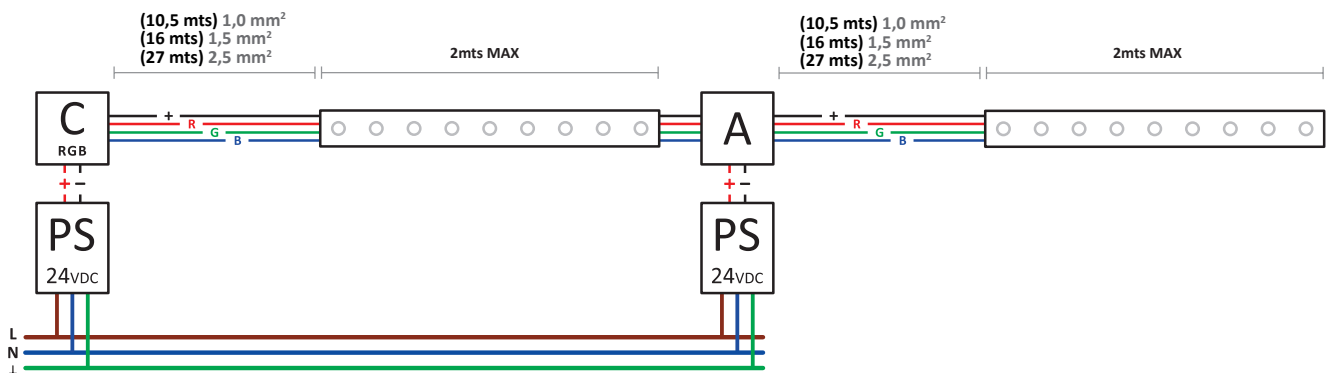

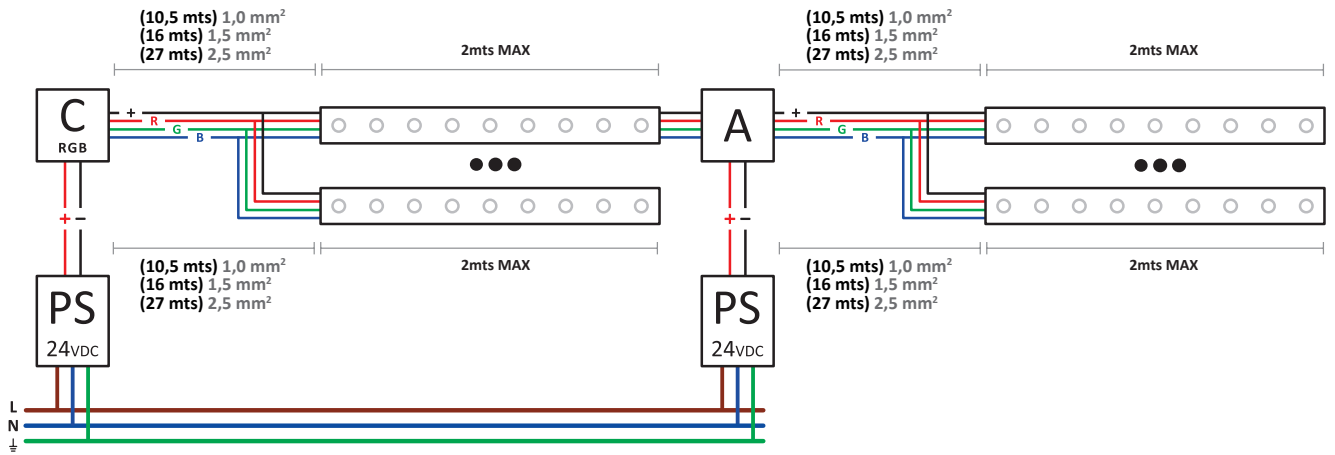

DMX

