





The photograph may not match the reference exactly. Please read the product description to identify the finish.

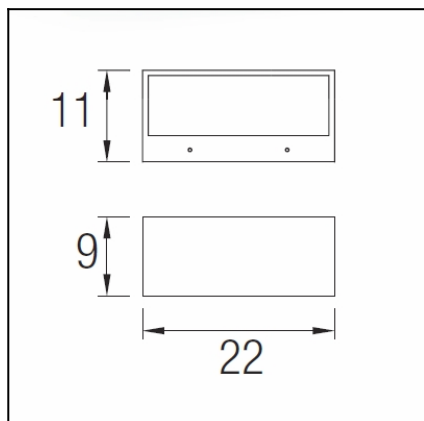

TECHNICAL CHARACTERISTICS


Type:	Wall fixture
IP Protection degrees:	IP54
IK Protection degrees:	IK04
Light source 1:	1 x E27 max. 60W Maximum lamp length: 155.00 mm
Total power consumption (W):	60
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	6
Net Weight (Kg):	1.145
EAN:	8435381400460



MATERIALS / FINISHES

Structure material:	Injected aluminium	Diffuser material:	Glass
Structure finish:	White	Diffuser finish:	Matt

Download photometric file .ldt / .ies

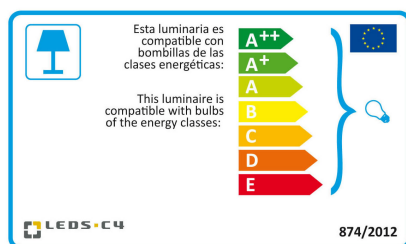


Click on image to download energy label

Luminaire			Measurem.			Lamp		
Code	05-9649		Code	05-9649		Code	PL-C13W/840/2P	
Name	Aplique dir/ind 22W TC-D		Name	Aplique dir/ind 22W TC-D		Number	1	
Line	Eulumdat		Date	27-01-2014		Position		
Efficiency			40.02%		Coordinate system	CG	Total Flux	1440.00 lm
Maximum value			133.53 cd		Position	C=0.00 G=165.00	Asymmetrical	
Rectangular Luminaire			Length	110 mm	Width	220 mm	Height	90 mm
Rectangular Luminous Area			Length	90 mm	Width	155 mm	Height	1 mm
Horizontal Luminous Area			0.013950 m2		Emitting area on Plane 180°		0.000090 m2	
Emitting area on Plane 0°			0.000090 m2		Emitting area on Plane 270°		0.000155 m2	
Emitting area on Plane 90°			0.000155 m2		Glare area at 76°		0.003462 m2	
Symmetry Type			Asymmetrical		Maximum Gamma Angle		180	
Measurement Distance			0.00		Measurement Flux		1440.00 lm	
Operator			Asselum		Source voltage			
Temperature			25.00 °C		Source current			
Humidity			60.00 %		Photocell			
Notes								


Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	PL-C13W/840/2P	PL-C13W/840/2P - 22.00 W	1440.00	22.00	1
C.I.E.	55 84 97 49 40	D DIN 5040			
F UTE	0.20 D + 0.20 T	B NBN			
		C42			
		BZ 3 / 0.6 / BZ 4			

110mm x 220mm






C Halfplanes
 180.0 — 0.0
 270.0 — 90.0


ULOR 20.23 %
 DLOR 19.79 %
 RN 50.56 %

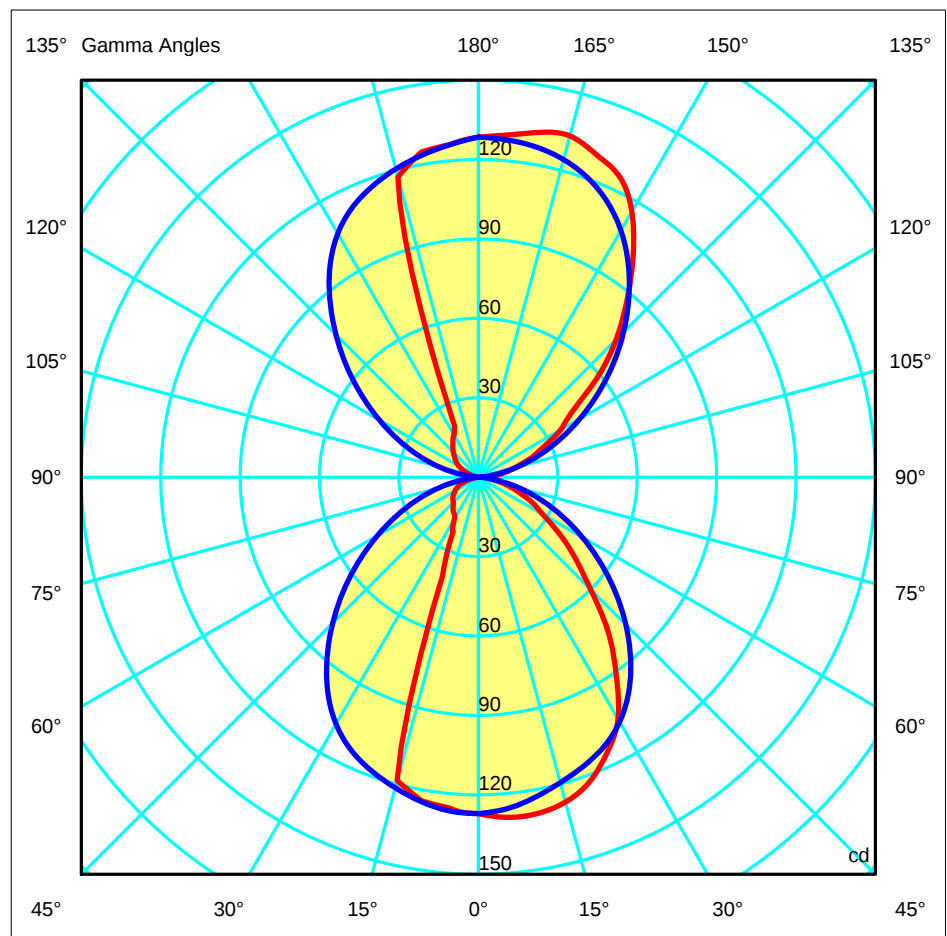

CRISTAL ARENADO INTERIOR
SANDFROSTED GLASS INSIDE

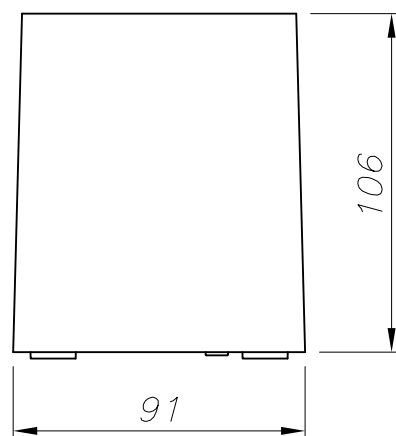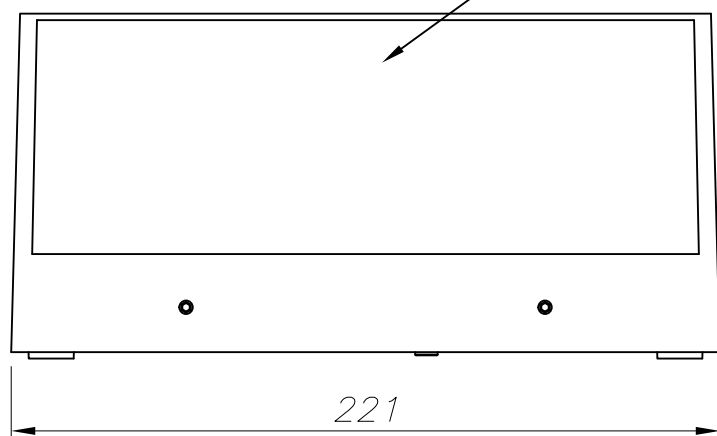


ALUMINIO INYECTADO
INJECTED ALUMINUM

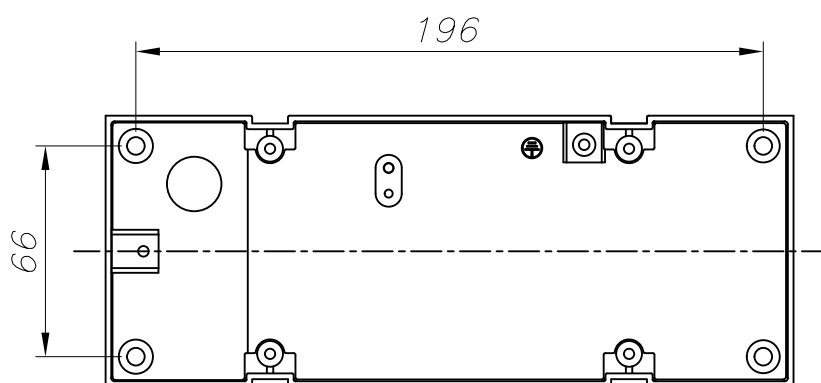


PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE


①

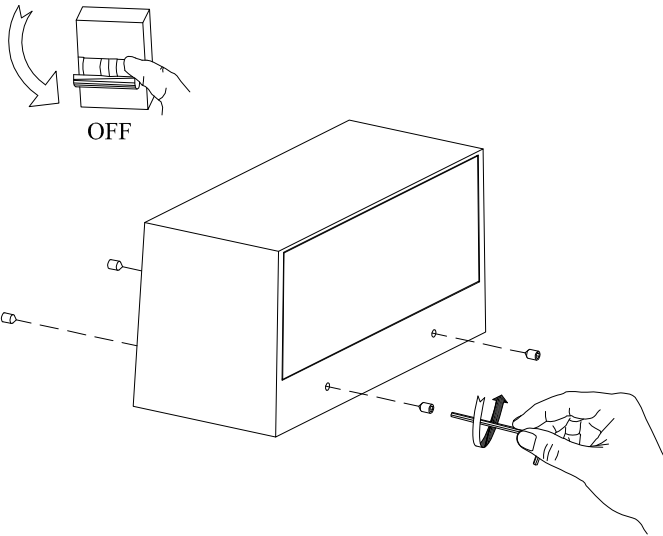


②

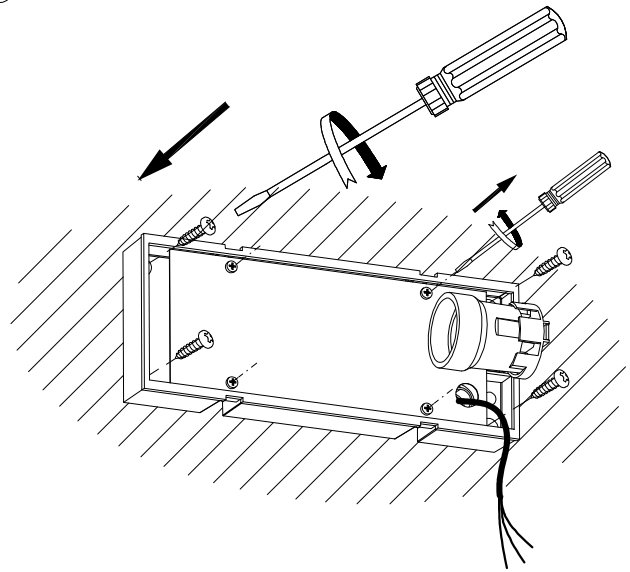


③

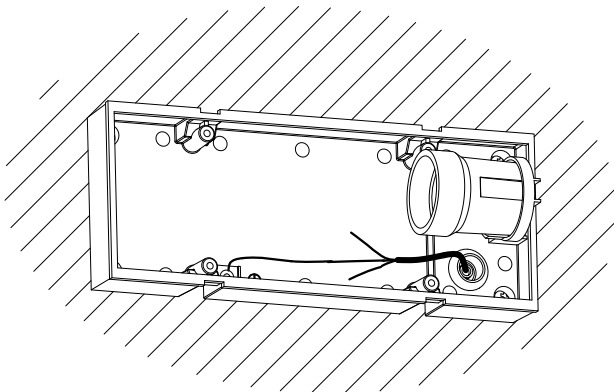

④

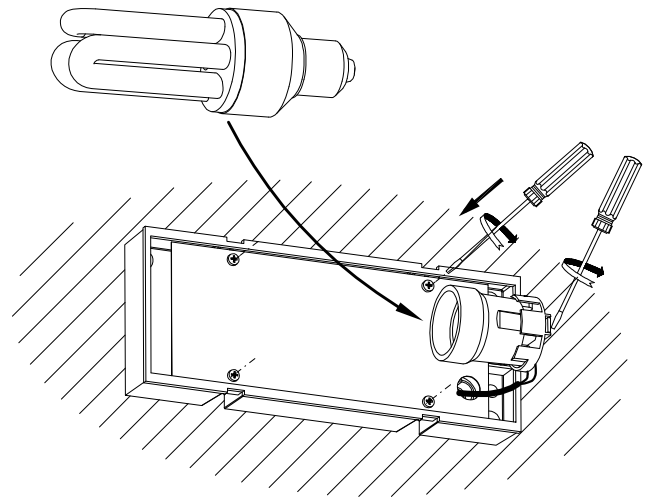

⑤

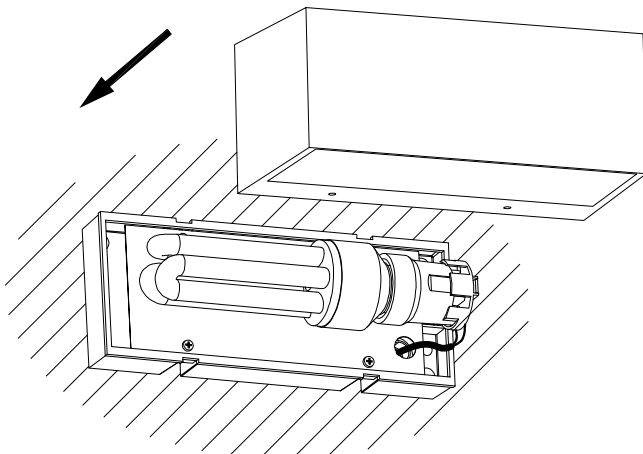

⑥

