OUT

AFRODITA
05-9228-34-37

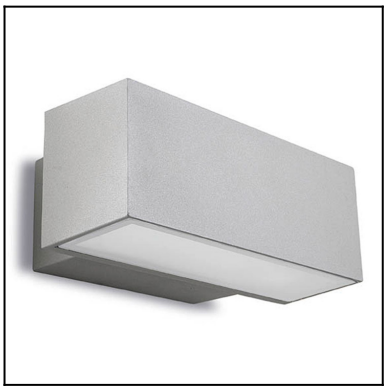

The photograph may not match the reference exactly. Please read the product description to identify the finish.

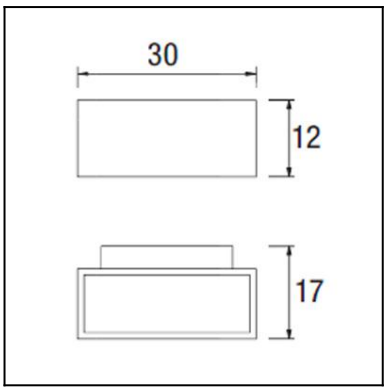



Download photometric file .ldt /.ies

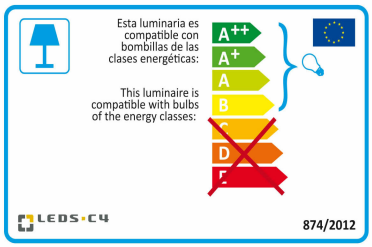

Click on image to download energy label

Description

Straight edged lamp designed for lighting vertical surfaces. Injected aluminium body and tempered glass diffuser. Available in various sizes and finishes: white, light grey, dark grey and brown. Available in different wattages for metal halide lamps, LED and fluorescent lights.

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP65
IK Protection degrees:	IK04
Light source 1:	2 x G24q3 26W
Total power consumption (W):	57.5
Voltage / Frequency:	220-240V/50Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	2.23
EAN:	8435111049242

MATERIALS / FINISHES

Structure material:	Injected aluminium	**Diffuser material:**	Glass
Structure finish:	Grey	**Diffuser finish:**	Matt

GEAR

Gear included: Yes, electronic

LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire		**Measurem.**		**Lamp**	
Code	05-9228-34-Z5	Code	LEDS024	Code	TC-DEL 26/840
Name	AFRODITA	Name	AFRODITA	Number	2
Line	Eulumdat	Date	29-04-1994	Position	

Efficiency	28.68%	Coordinate system	CG	Total Flux	3600.00 lm
Maximum value	222.12 cd	Position	C=90.00 G=20.00	Asymmetrical	

Rectangular Luminaire	Length	300 mm	Width	178 mm	Height	120 mm
Rectangular Luminous Area	Length	66 mm	Width	267 mm	Height	0 mm

Horizontal Luminous Area	0.017622 m2	Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.004263 m2

Symmetry Type	Asymmetrical	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	3600.00 lm

Operator		Source voltage	
Temperature	25.00 °C	Source current	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	TC-DEL 26/840	TC-DEL 26/840 - 26.00 W	1800.00	26.00	2

C.I.E.	52 85 98 50 29	D DIN 5040	C41
F UTE	0.14 D + 0.14 T	B NBN	BZ 4

300mm x 178mm



C Halfplanes

180.0 — 0.0

270.0 — 90.0

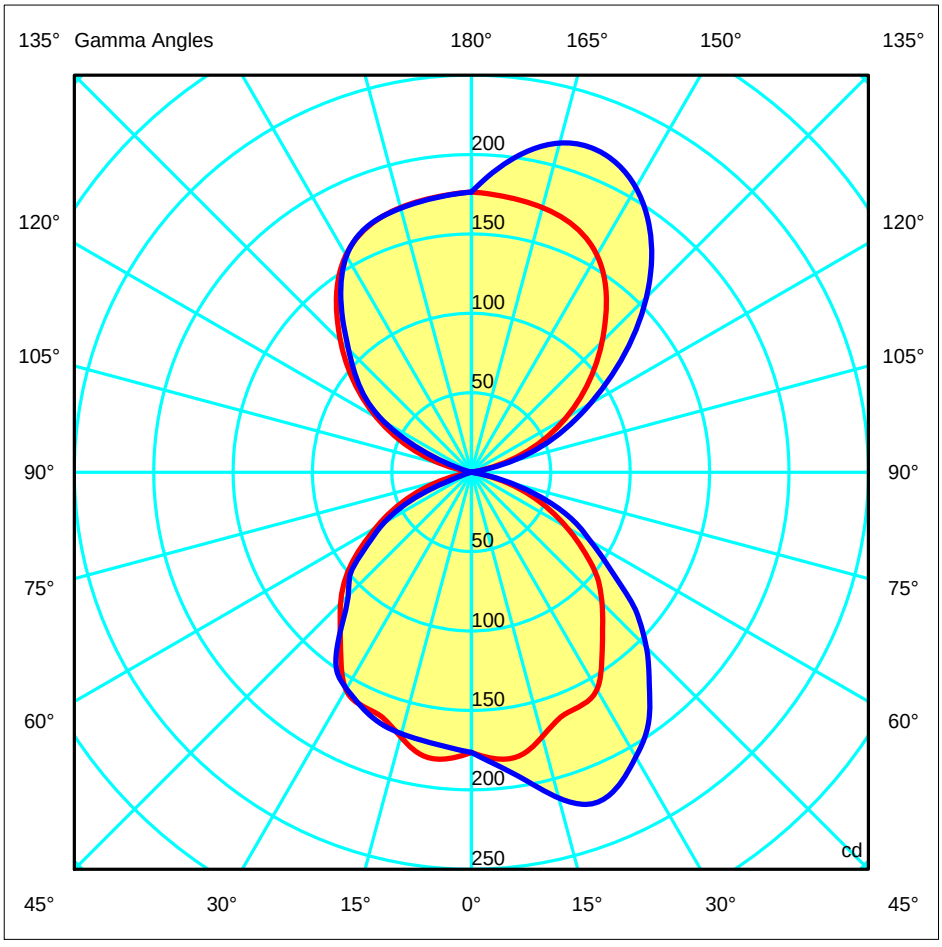

ULOR	14.32 %
DLOR	14.36 %
RN	49.95 %

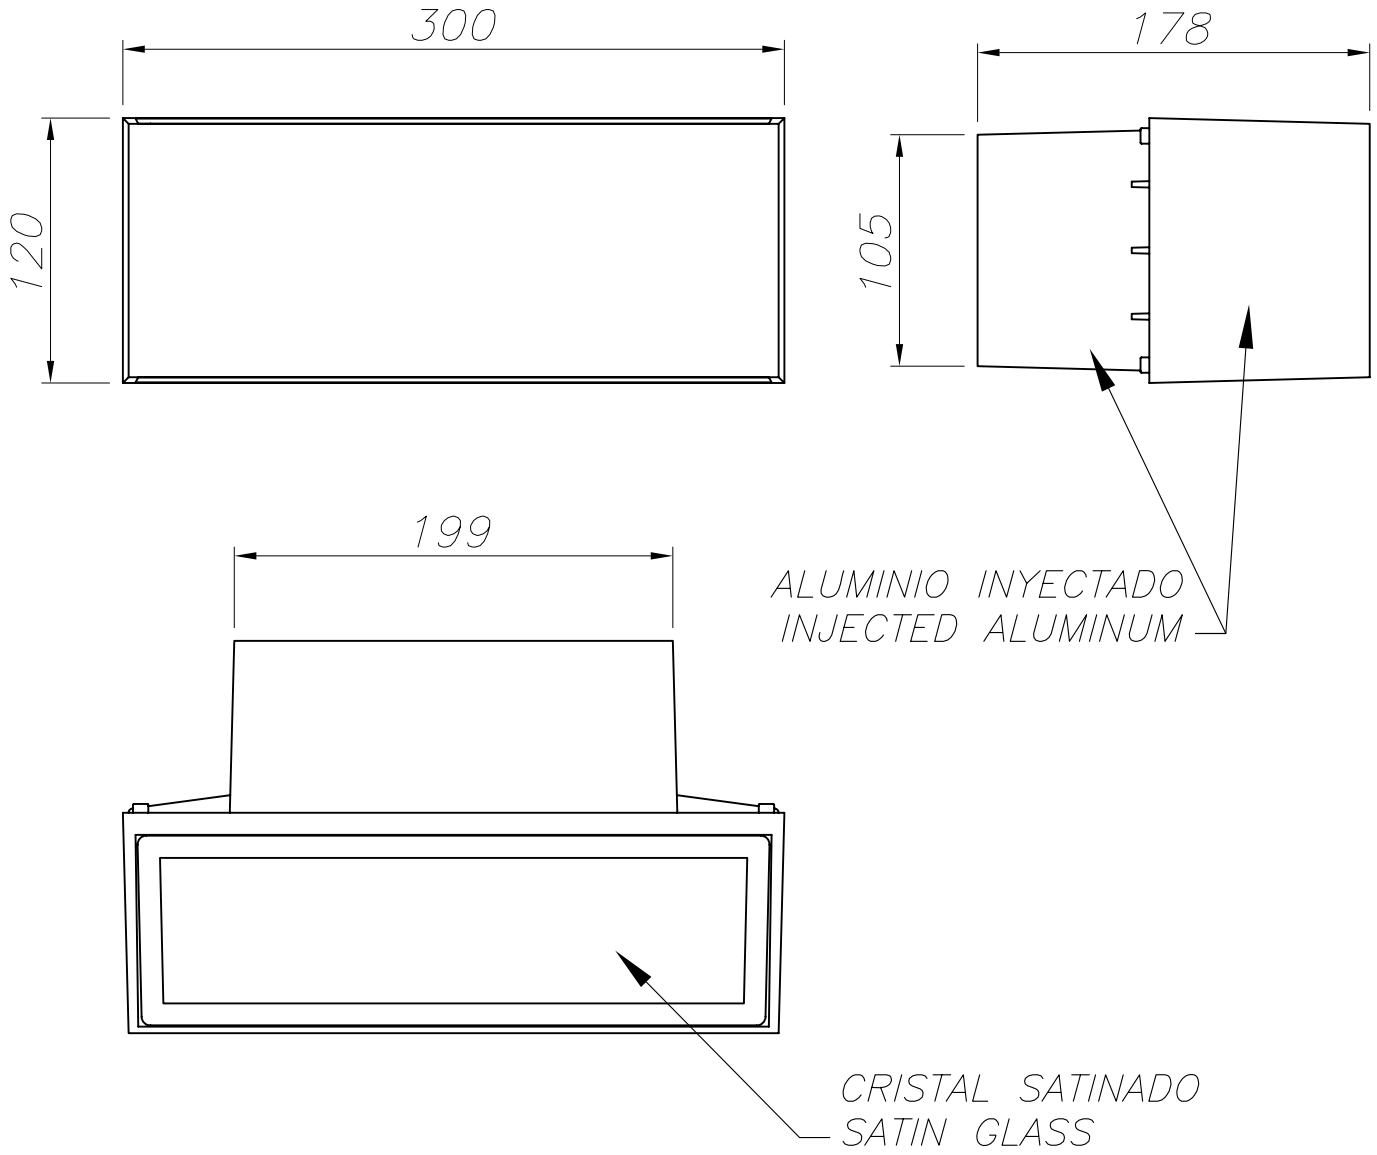

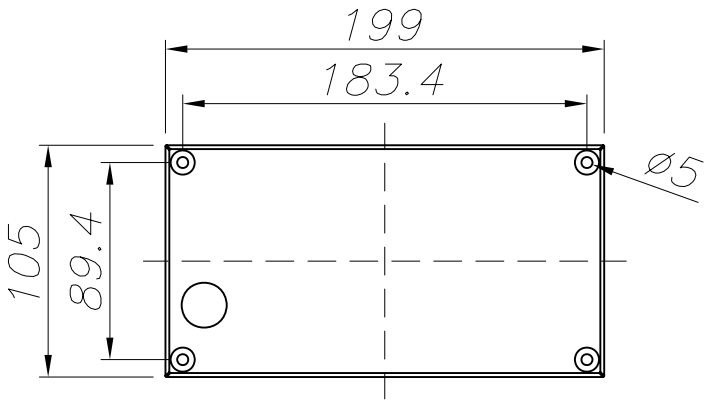

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

LEDS·C4

OUTDOOR

05-9228

①

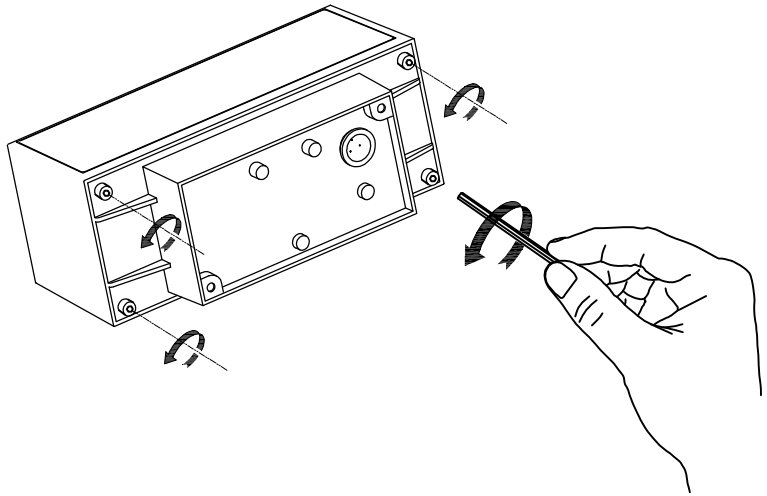

②

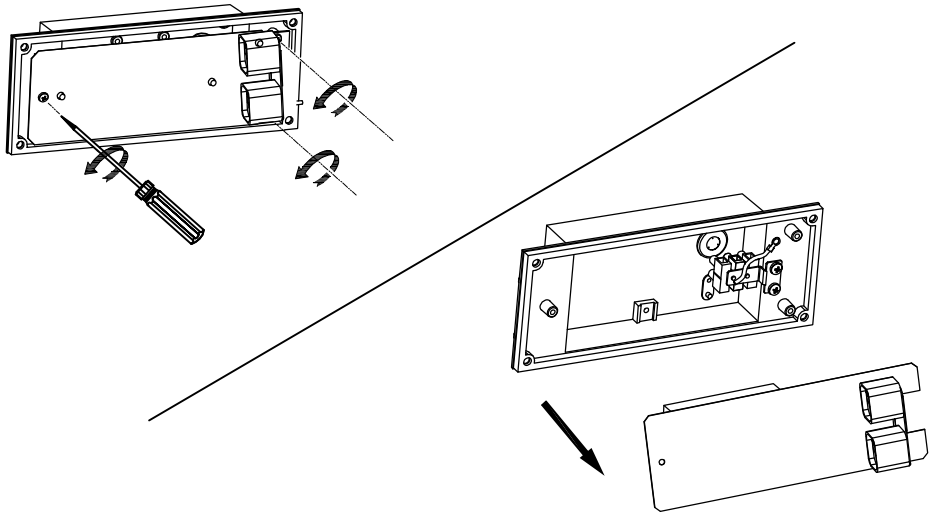

③

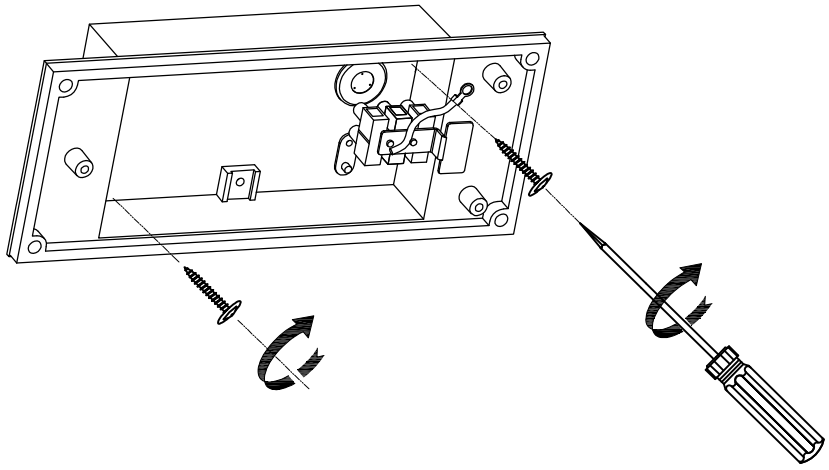

④

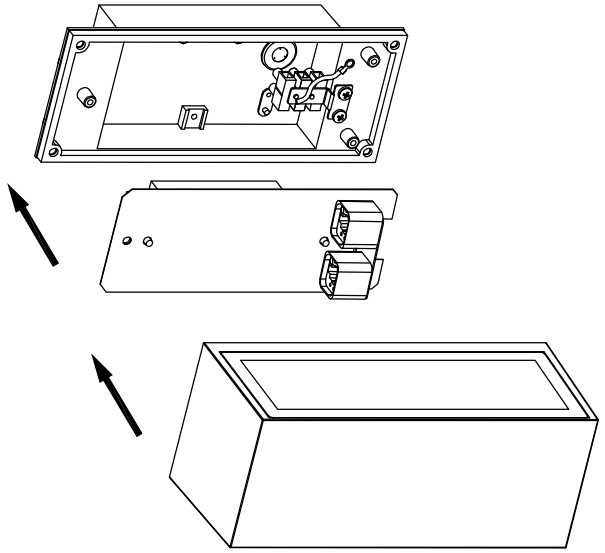

31-03-09