




The photograph may not match the reference exactly. Please read the product description to identify the finish.

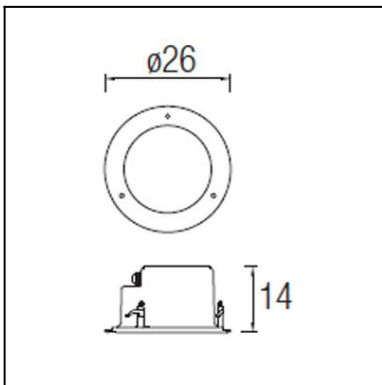

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
IP Protection degrees:	IP66
IK Protection degrees:	IK08
Light source 1:	1 x GX24d3 26W
Total power consumption (W):	33.4W
Angle of the optics / Reflector:	80°
Voltage / Frequency:	230V/50Hz
Warranty (Years):	2
Units per box:	4
Net Weight (Kg):	2.67
EAN:	8435111076347



MATERIALS / FINISHES

Structure material: Stainless steel AISI304
Injected aluminium

Structure finish: Polished
Grey


Diffuser material: Glass

Diffuser finish: Matt

GEAR

Gear included: Yes, Magnetic

Download photometric file .ldt /.ies

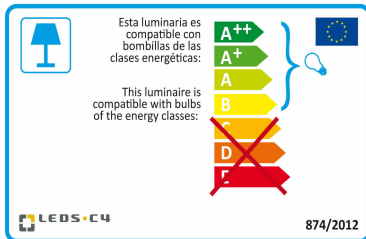

Click on image to download energy label

71-9745-05-05**Structure material:**


Polypropylene

Structure finish:Grey

Luminaire		Measur.		Lamp	
Code	15-9391-Y4-T2	Code	15-9391-Y4-T2	Code	PL-T26W/830/2P
Name	Downl GEA 1x26W TC-T dif. opal	Name	Downl GEA 1x26W TC-T dif. opal	Number	1
Line	Eulumdat	Date	31-07-2009	Position	
Efficiency	43.69%	Coordinate system	CG	Total Flux	1800.00 lm
Maximum value	424.67 cd	Position	C=0.00 G=0.00	Double Symmetrical	
Round Luminaire	Diam.	260 mm	Height	7 mm	
Round Luminous Area	Diam.	182 mm	Height	1 mm	
Horizontal Luminous Area	0.026016 m2	Emitting area on Plane 180°	0.000182 m2		
Emitting area on Plane 0°	0.000182 m2	Emitting area on Plane 270°	0.000182 m2		
Emitting area on Plane 90°	0.000182 m2	Glare area at 76°	0.006470 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90		
Measurement Distance	0.00	Measurement Flux	1800.00 lm		
Operator	Asselum	Source voltage			
Temperature	25.00 °C	Source current			
Humidity	60.00 %	Photocell			
Notes					

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	PL-T26W/830/2P	PL-T26W/830/2P - 26.00 W	1800.00	26.00	1	
C.I.E.	58 85 97 100 44	D DIN 5040				
F UTE	0.44 D	B NBN				
		A40				
		BZ 3				


Diam=260mm






C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 43.69 %
RN 0.00 %

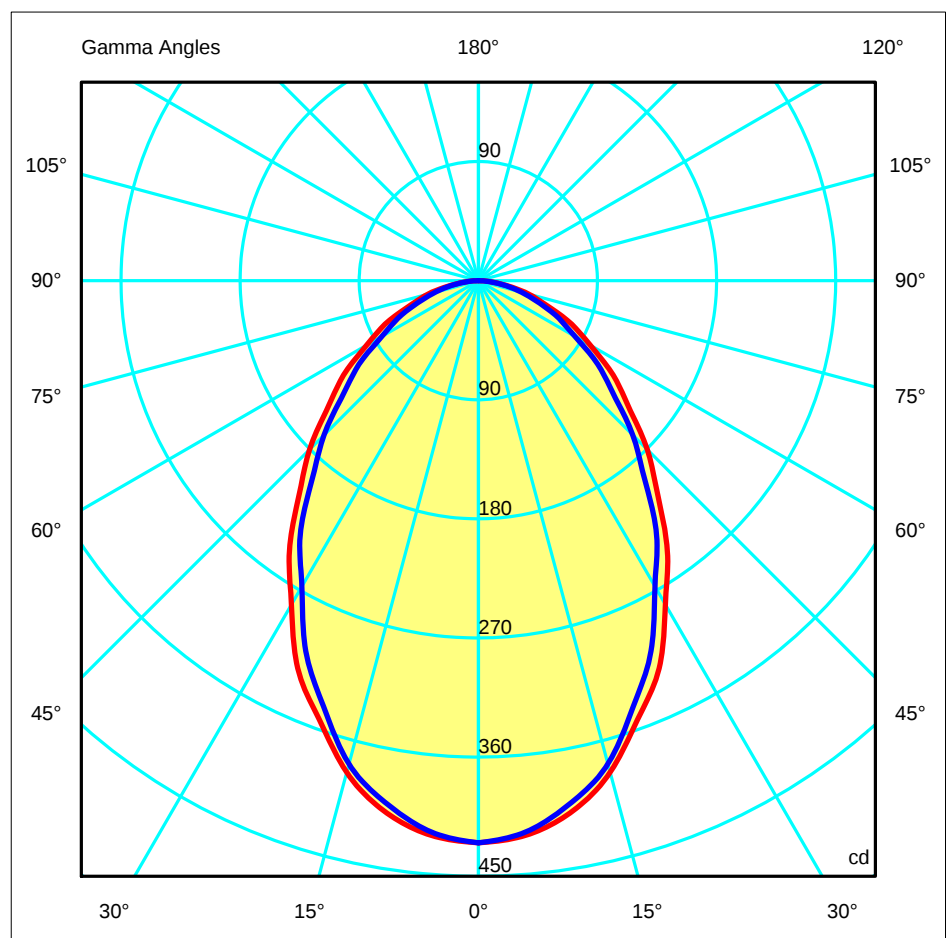

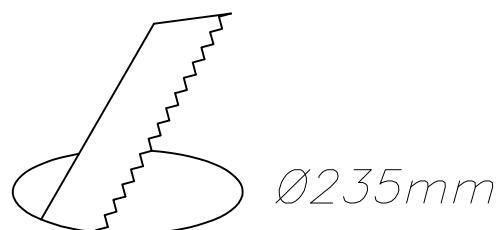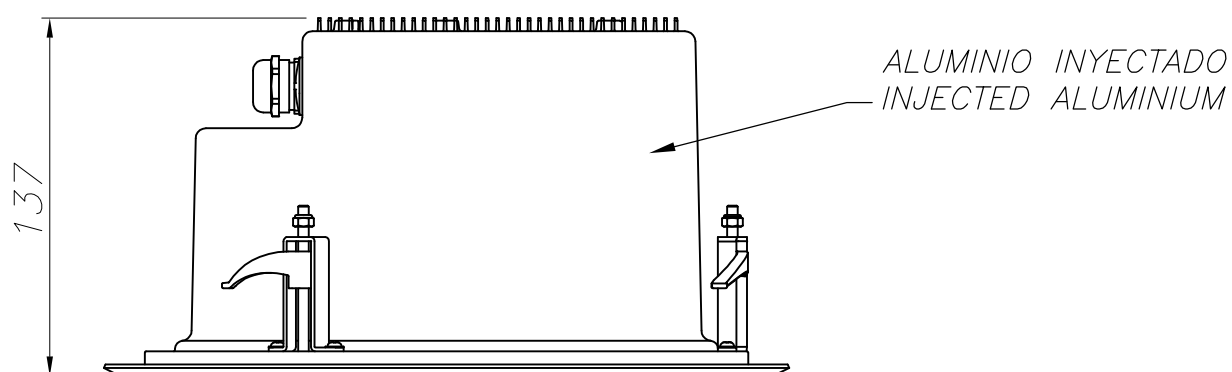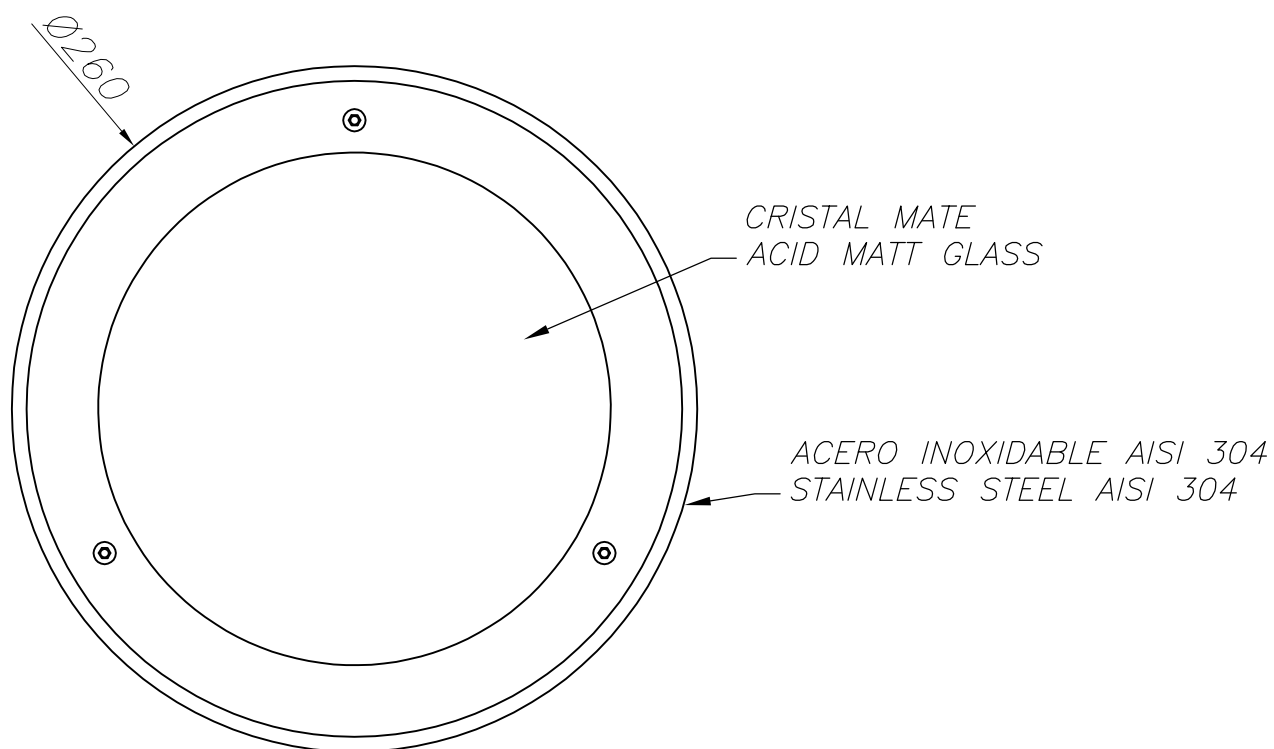

AGUJERO PARA EMPOTRAR
FITTING HOLE

