OUT

TORCH
55-9459-Z5-M3

The photograph may not match the reference exactly. Please read the product description to identify the finish.

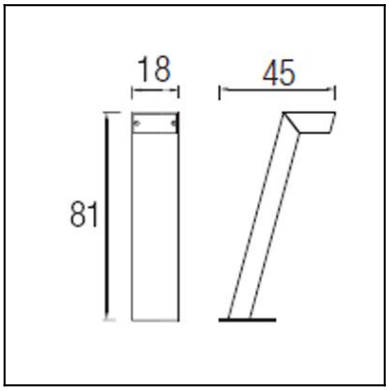

TECHNICAL CHARACTERISTICS

Type:	Beacon
IP Protection degrees:	IP65
IK Protection degrees:	IK10
Light source 1:	2 x E27 MAX 18W Maximum lamp length: 150.00 mm Maximum lamp diameter: 50.00 mm
Total power consumption (W):	36
Voltage / Frequency:	230V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	6.52
EAN:	8435111082058

MATERIALS / FINISHES

Structure material:	High purity aluminium	**Diffuser material:**	Polycarbonate
Structure finish:	Urban grey	**Diffuser finish:**	Matt



Download photometric file .ldt /.ies

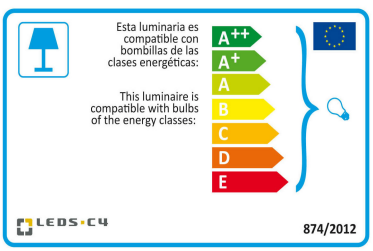

Click on image to download energy label

LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire		Measurem.		Lamp	
Code	55-9459	Code	55-9459	Code	PLEC20
Name	Baliza 2x18W E27	Name	Baliza 2x18W E27	Number	2
Line	Eulumdat	Date	29-12-2010	Position	

Efficiency	31.37%	Coordinate system	CG	Total Flux	2400.00 lm
Maximum value	246.97 cd	Position	C=90.00 G=70.00	Sym. on planes 270-90	

Rectangular Luminaire	Length	200 mm	Width	180 mm	Height	800 mm
Rectangular Luminous Area	Length	180 mm	Width	70 mm	Height	120 mm

Horizontal Luminous Area	0.012600 m2	Emitting area on Plane 180°	0.021600 m2
Emitting area on Plane 0°	0.021600 m2	Emitting area on Plane 270°	0.008400 m2
Emitting area on Plane 90°	0.008400 m2	Glare area at 76°	0.024007 m2

Symmetry Type	Sym. on planes 270-90	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	2400.00 lm

Operator	asselum	Source voltage	
Temperature	25.00 °C	Source current	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	PLEC20	PLEC20 - 20.00 W	1200.00	20.00	2

C.I.E.	30 59 83 87 31	D DIN 5040	B11
F UTE	0.27 H + 0.04 T	B NBN	BZ 7 / 2.5 / BZ 6

200mm x 180mm



C Halfplanes

270.0
180.0 0.0
90.0

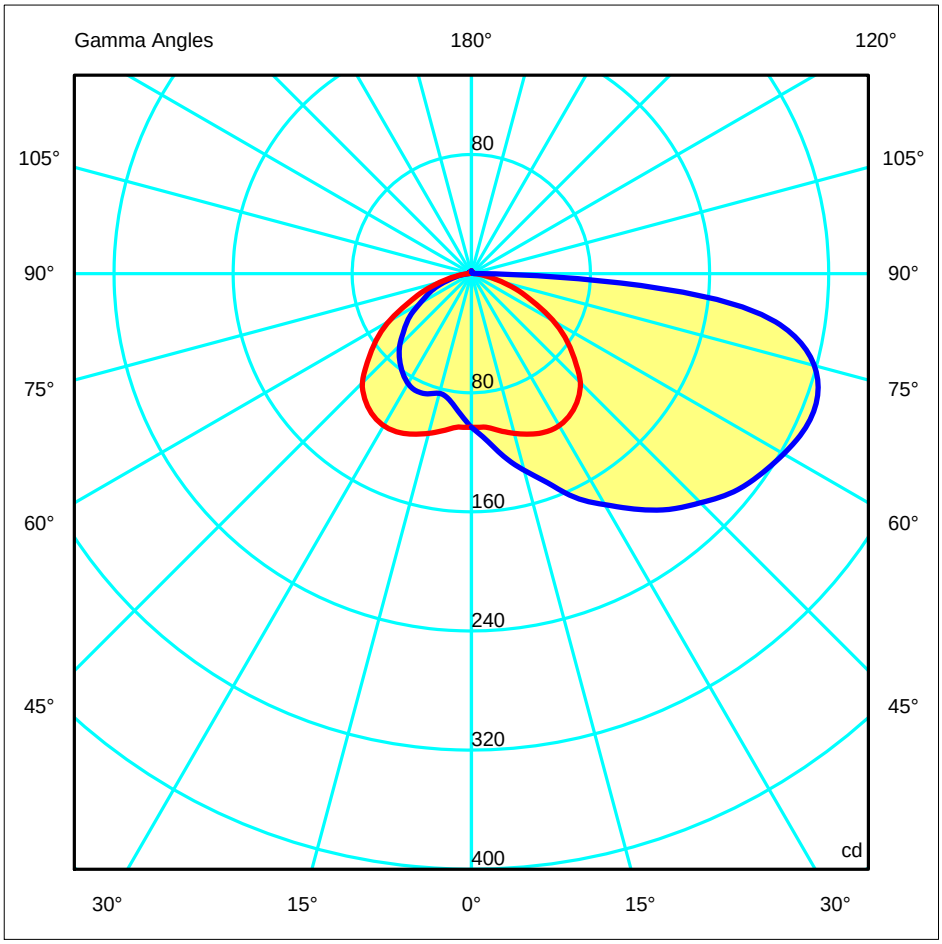

ULOR	4.08 %
DLOR	27.29 %
RN	13.00 %

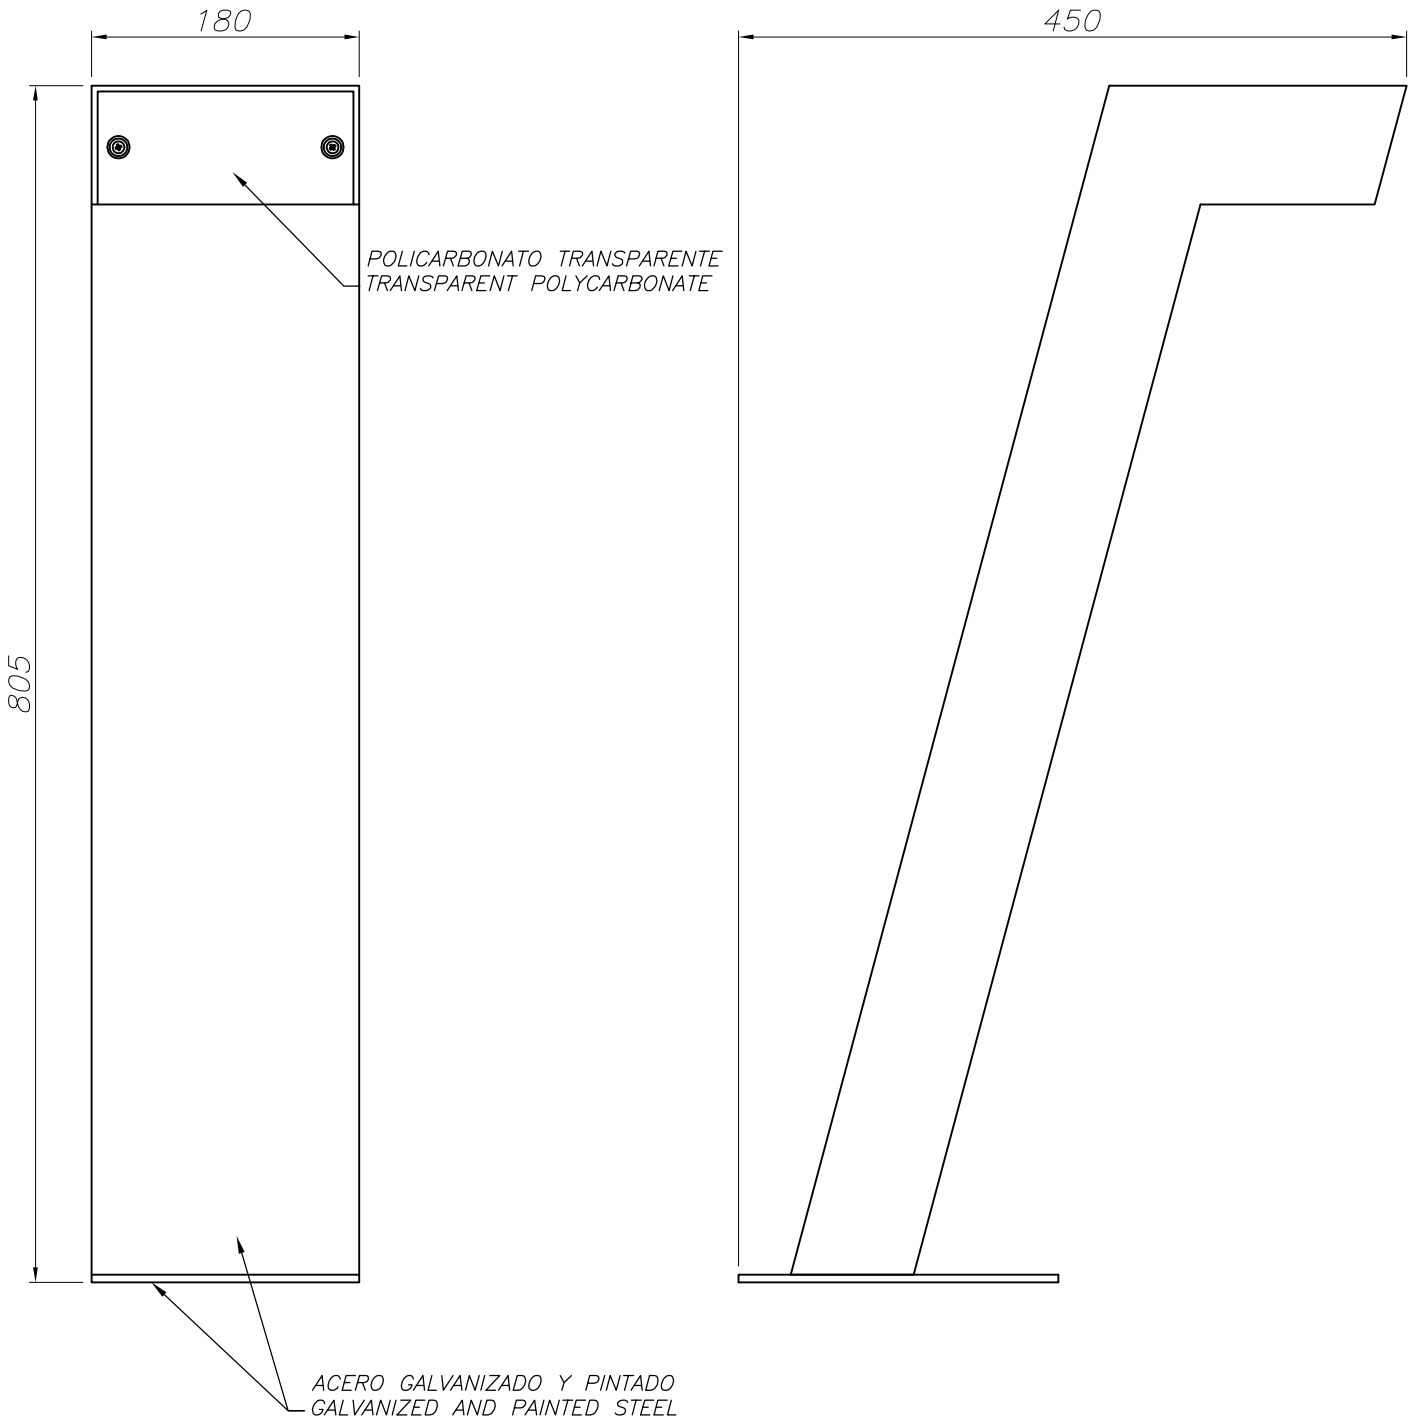

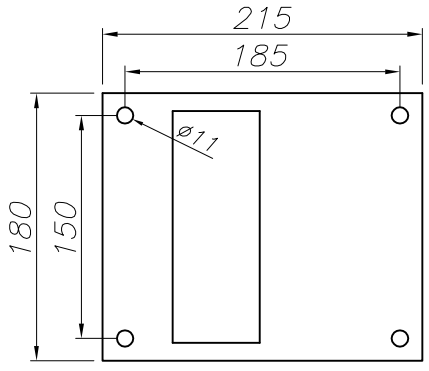

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

LEDS-C4

OUTDOOR

55-9459

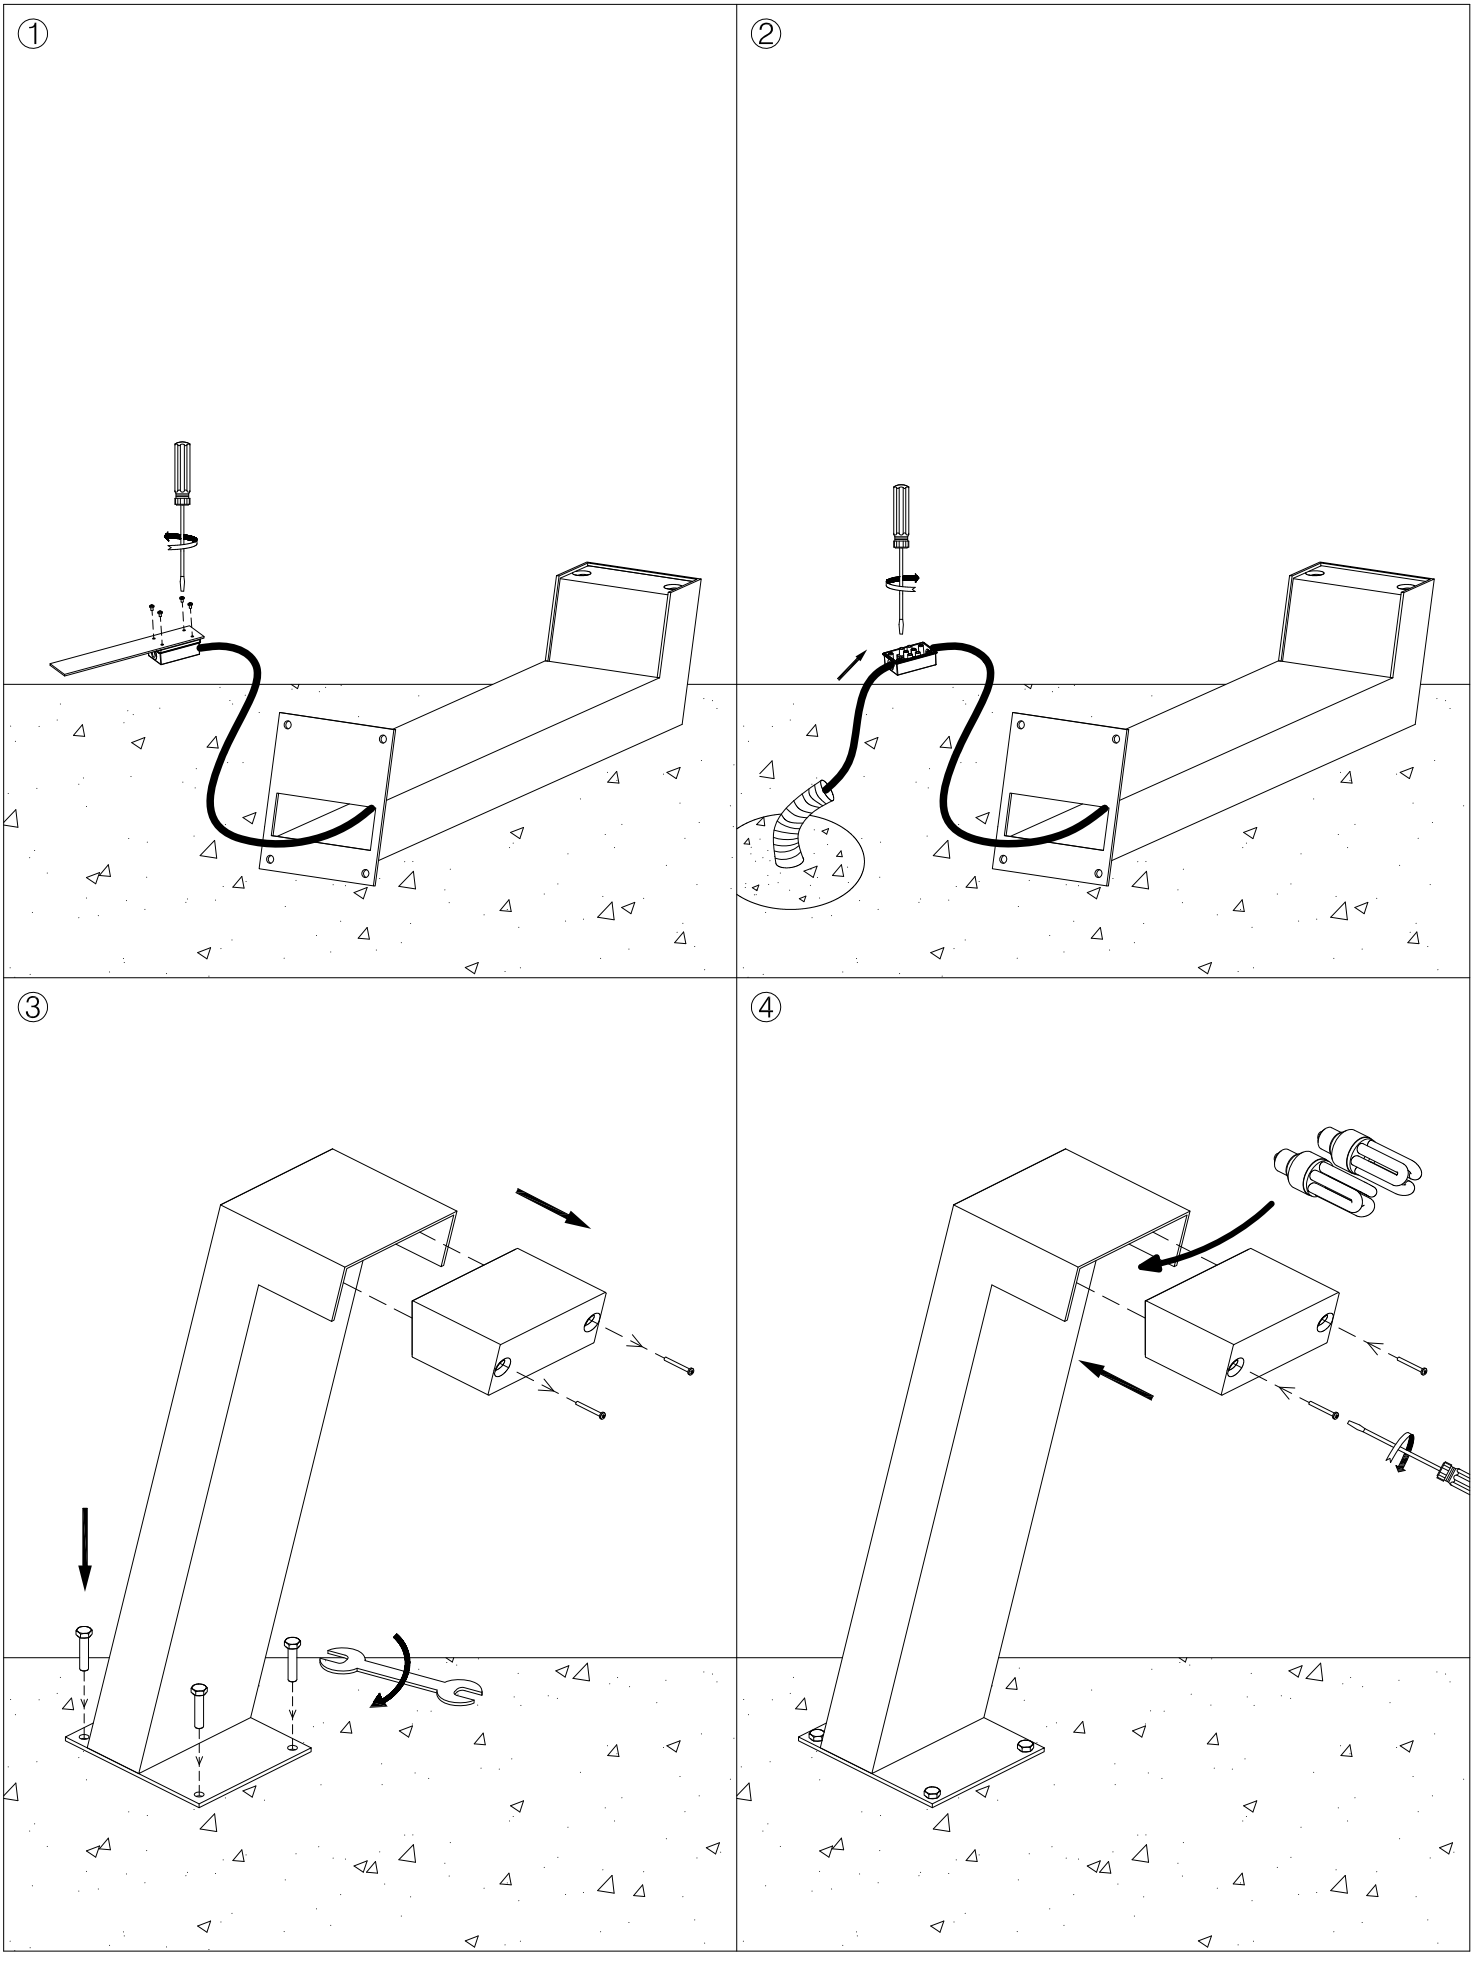

22-11-10