





The photograph may not match the reference exactly. Please read the product description to identify the finish.

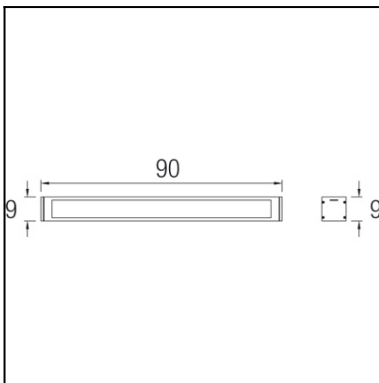

Download photometric file .ldt /.ies

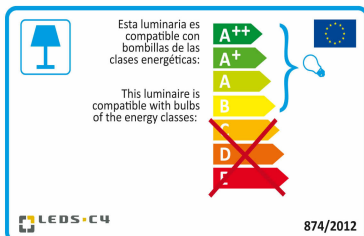

Click on image to download energy label

Description

Straight edged light unit. Tempered glass diffuser with body produced in extruded aluminium. Available in light grey. T5 fluorescent lamp light source (not supplied). Includes BAG electronic control components.

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
Adjustable:	Adjustable $\pm 15^\circ$ on the vertical axis
IP Protection degrees:	IP54
IK Protection degrees:	IK07
Light source 1:	1 x G5 39W
Total power consumption (W):	39.8
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	4.435
EAN:	8435111089507



MATERIALS / FINISHES

Structure material:	Extruded aluminium	Diffuser material:	Glass
Structure finish:	Grey	Diffuser finish:	Tempered


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp		
Code	15-9560	Code	15-9560	Code	OSRAM FQ 39W/840 HO LUMILUX	
Name	AFRODITA	Name	AFRODITA	Number	1	
Line	Eulumdat	Date	16-10-2013	Position		
Efficiency	61.09%	Coordinate system	CG	Total Flux	3100.00 lm	
Maximum value	925.51 cd	Position	C=0.00 G=170.00	Double Symmetrical		
Rectangular Luminaire	Length	900 mm	Width	90 mm	Height	4 mm
Rectangular Luminous Area	Length	860 mm	Width	50 mm	Height	0 mm
Horizontal Luminous Area	0.043000 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.010403 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		3100.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	OSRAM FQ 39W/840 HO LUMILUX COOL WHITE	OSRAM FQ 39W/840 HO LUMILUX COOL WHITE	3100	39.00	1	
C.I.E.	0 0 0 0 61	D DIN 5040				
F UTE	0.61 T	B NBN		BZ 10		

900mm x 90mm



C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 61.09 %
 DLOR 0.00 %
 RN 100.00 %

