



The photograph may not match the reference exactly. Please read the product description to identify the finish.

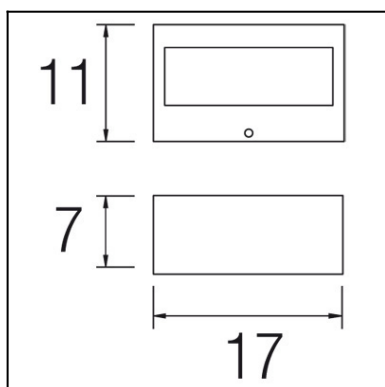

TECHNICAL CHARACTERISTICS


Type:	Wall fixture
IP Protection degrees:	IP44
IK Protection degrees:	IK06
Light source 1:	1 x R7s MAX 100W Maximum lamp length: 78.00 mm
Total power consumption (W):	100
Voltage / Frequency:	230V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.675
EAN:	8435111077900




MATERIALS / FINISHES

Structure material: Injected aluminium
Structure finish: White


Diffuser material: Glass
Diffuser finish: Matt

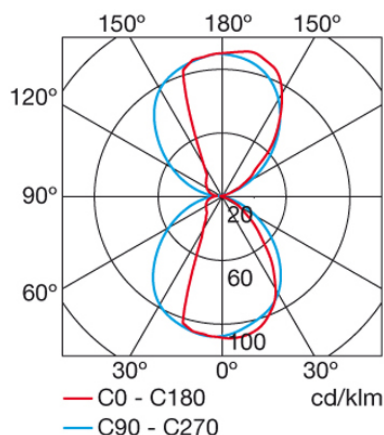


Download photometric file .ldt / .ies

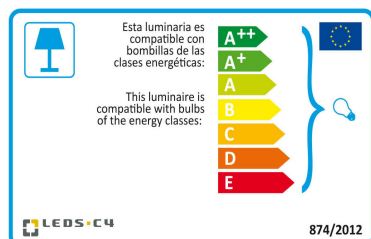

Click on image to download energy label

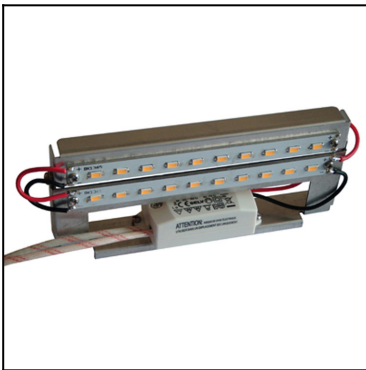71-8969-00-00**71-9747-00-00****Structure material:**

Aluminium

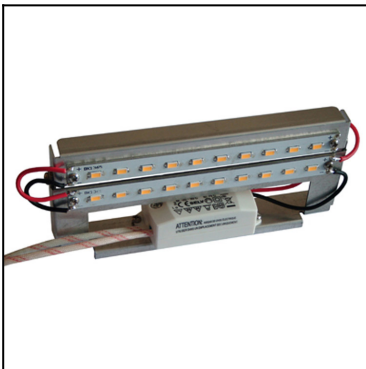
71-9781-00-00**Structure material:**

Aluminium

Luminaire			Measurem.			Lamp		
Code	05-9177-34-B8		Code	05-9177-34-B8		Code	100T3 Q/CL/CP 230V	
Name	Aplique dir/ind 100W halog R7s		Name	Aplique dir/ind 100W halog R7s		Number	1	
Line	Eulumdat		Date	19-11-2008		Position		
Efficiency			40.02%		Coordinate system	CG	Total Flux	1600.00 lm
Maximum value			148.36 cd		Position	C=0.00 G=165.00	Asymmetrical	
Rectangular Luminaire			Length	110 mm	Width	170 mm	Height	70 mm
Rectangular Luminous Area			Length	70 mm	Width	155 mm	Height	1 mm
Horizontal Luminous Area			0.010850 m2		Emitting area on Plane 180°		0.000070 m2	
Emitting area on Plane 0°			0.000070 m2		Emitting area on Plane 270°		0.000155 m2	
Emitting area on Plane 90°			0.000155 m2		Glare area at 76°		0.002693 m2	
Symmetry Type			Asymmetrical		Maximum Gamma Angle		180	
Measurement Distance			0.00		Measurement Flux		1600.00 lm	
Operator			OxyTech		Source voltage			
Temperature			25.00 °C		Source current			
Humidity			60.00 %		Photocell			
Notes								

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	100T3 Q/CL/CP 230V	100T3 Q/CL/CP 230V - 100.00 W	1600.00	100.00	1	
C.I.E.	55 84 97 49 40	D DIN 5040				
F UTE	0.20 D + 0.20 T	B NBN				
		C42				
		BZ 3 / 0.6 / BZ 4				

110mm x 170mm



C Halfplanes


180.0 — 0.0



270.0 — 90.0

ULOR 20.23 %


DLOR 19.79 %

RN 50.56 %

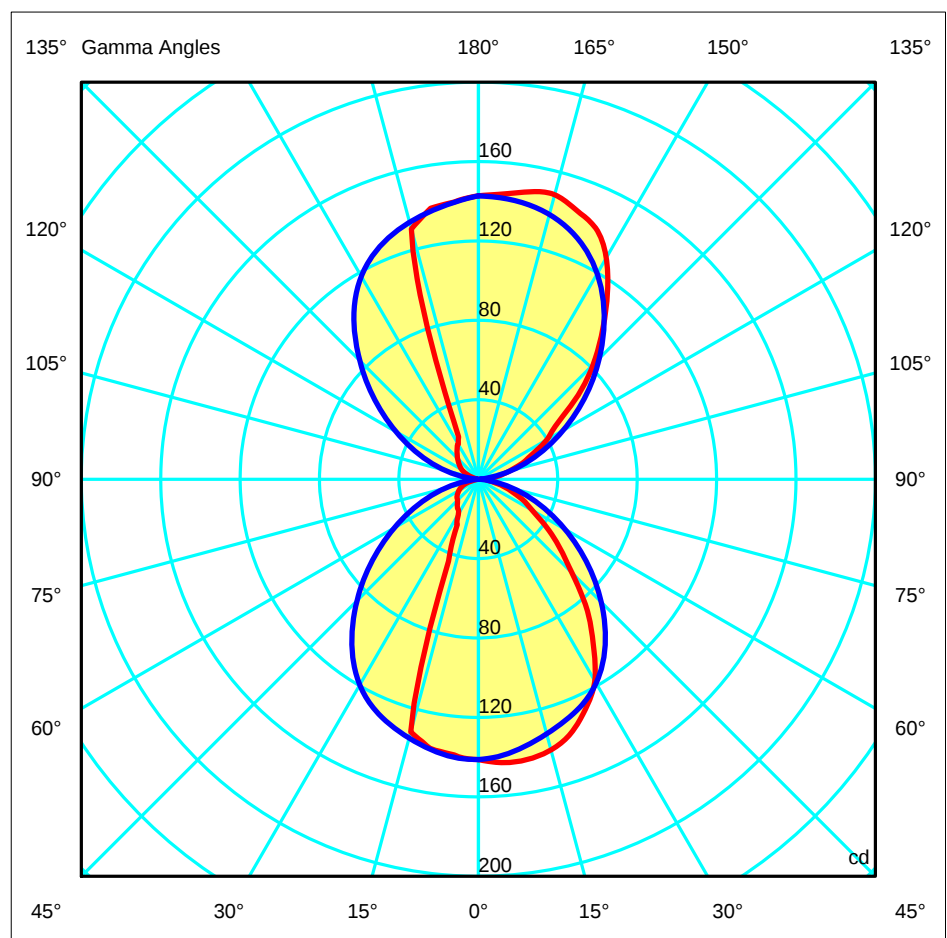


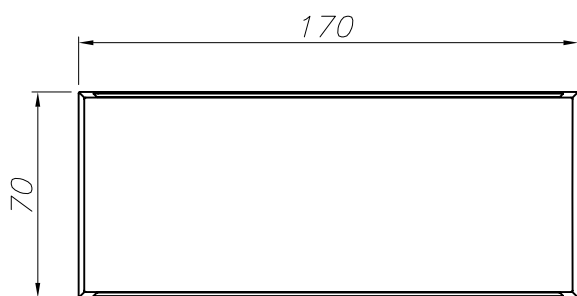

ALUMINIO INYECTADO
INJECTED ALUMINUM

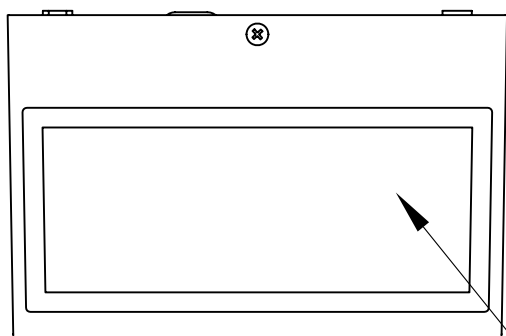


CRISTAL MATE
MATT GLASS

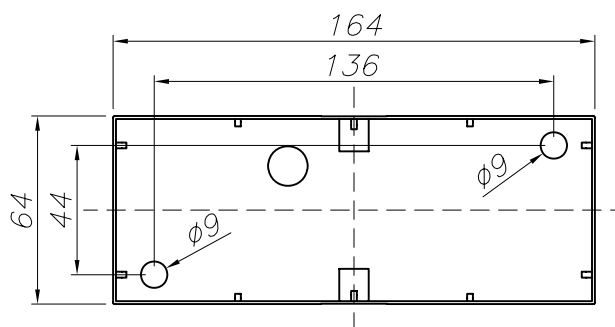


PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE


①

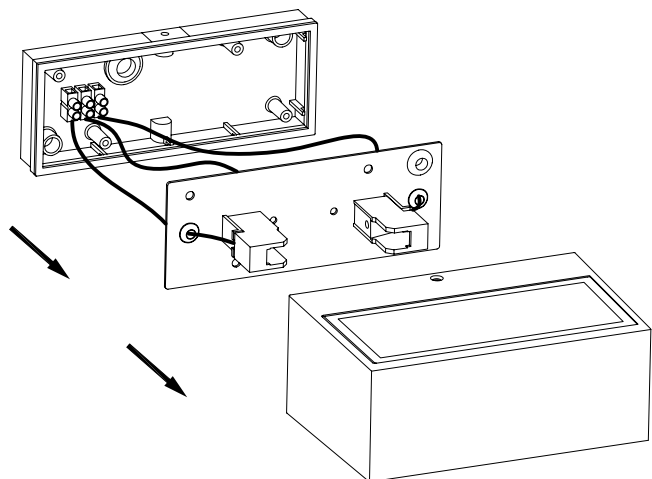

②

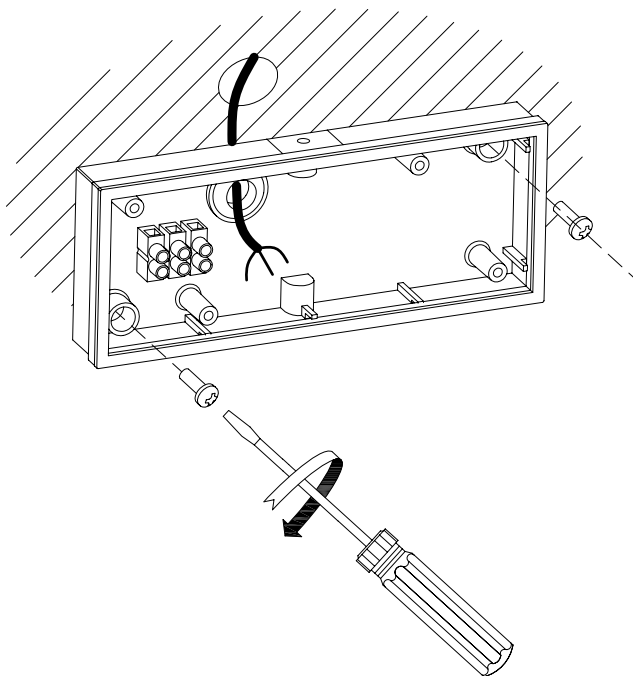

③

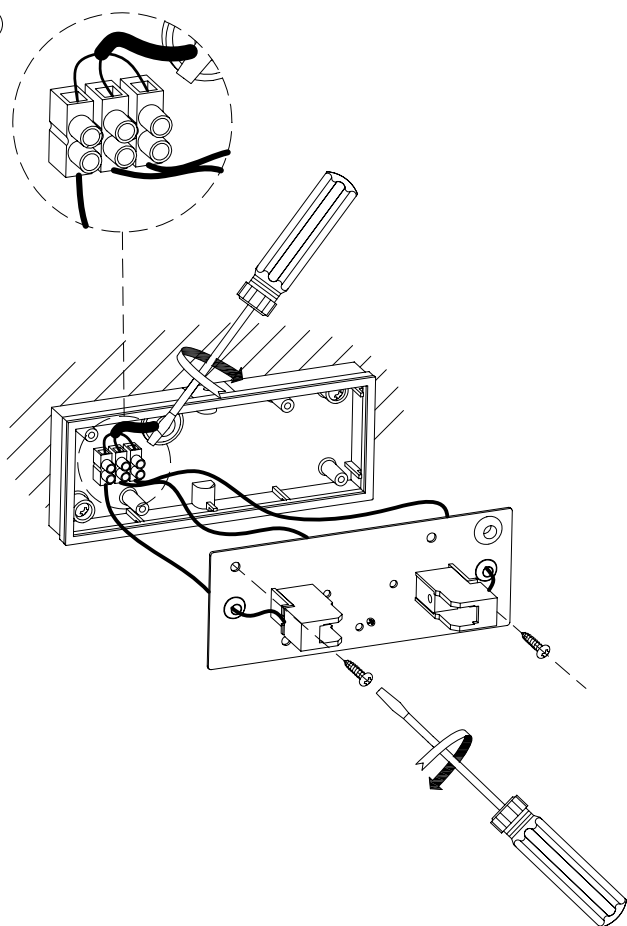

④

