

# OILO™ SAFETY & INSTALLATION INSTRUCTIONS

## DOUBLE CYLINDER AND LARGE CYLINDER LIGHTS

### PARTS ENCLOSED

- A. Wire Caps (2x)
- B. Ground Screw
- C. Mounting Screw (2x)
- D. Canopy
- E. Horseshoe Clamp – Crimps on Cord to Hold Pendant at Desired Height
- F. Mounting Plate
- G. Screw Tube
- H. Plastic Grommet
- I. Cord
- J. Threaded Nipple
- K. Diffuser
- L. Finial for Securing Diffuser

### IMPORTANT SAFETY INSTRUCTIONS:

\*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

### \*DIRECT WIRE FIXTURE: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

Oilo's Double and Large Cylinder fixtures are rated for up to three 60W MAX Type A, medium base bulbs. Bulb(s) are not included. To prevent the risk of fire, do not exceed recommended wattage.

### WARNINGS:

- To reduce the risk of fire, electrical shock or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb(s).
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.
- Do not subject the lamp to any shock while lit as shattering of bulbs may result.

### BEFORE INSTALLATION:

Please note that these instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the light. We strongly suggest that a qualified electrician install all direct-wired fixtures.

### PRE-ASSEMBLY:


- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended.

### ASSEMBLY:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY AT THE FUSE BOX / CIRCUIT BREAKER.
2. Carefully unpack all fixture parts and hardware and lay out on a large workspace. Do not throw away any parts.
3. In the following sequence thread the following over the Cord (I): Plastic Grommet (H), Canopy (F), Screw tube (G), and Mounting plate (F).
4. Gently pull down the wiring from the ceiling outlet box and allow the wires to hang.
5. Carefully inspect the lights fixture wires. The neutral fixture wire is white. The hot fixture wire is black. The ground wire is green.
6. Attach the ground wire (green) to the Mounting Plate (F) with the Ground Screw (B) on the Mounting Plate (F).
7. Connect the fixture wires to the ceiling outlet wires (black to black, white to white). Use the Wire Caps (A) to cover exposed wires and wrap connection with black electrical tape. Make sure no wire strands are exposed.
8. Measure desired drop for fixture to hang and tighten the Horseshoe Clamp (E) until it holds the canopy in place.
9. Gently tuck the wire connections neatly into the ceiling outlet box.
10. Attach the Mounting Plate (F) to the ceiling outlet box using the Mounting Screws (C). Tighten using a screwdriver.
11. Pull Canopy (D) up over the Mounting Plate (F). Secure the Canopy (D) to the Mounting Plate (F) with the Plastic Grommet (H).
12. Install (3) 60W MAX Type A, medium base bulbs into sockets. Do not exceed specified wattage.
13. Slide Diffuser (K) over threaded nipple (J) on tube.
14. Thread finial (L) onto exposed threads of nipple to secure position of diffuser inside shade.
15. Restore power to the outlet box.

### CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.

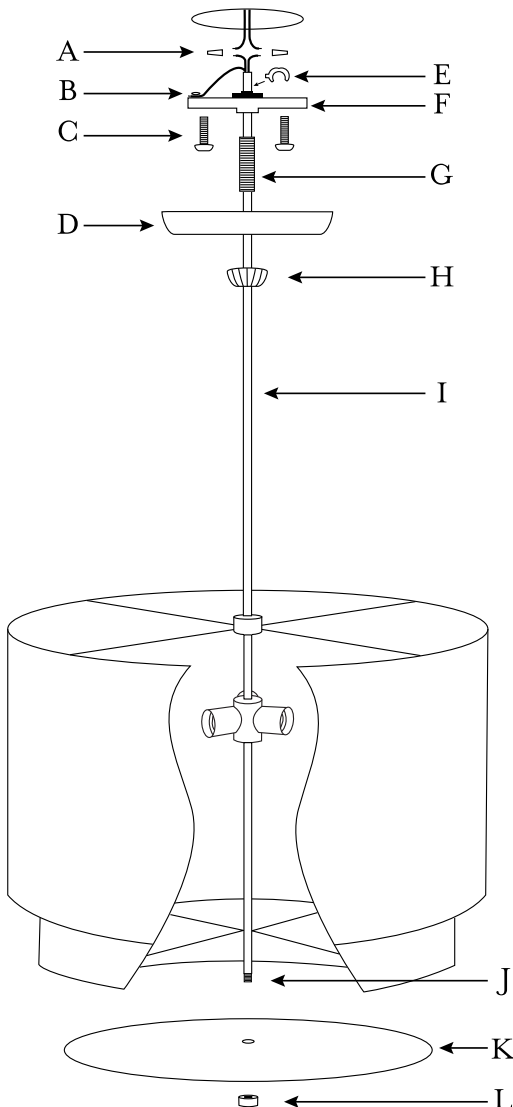


# OILO™ SAFETY & INSTALLATION INSTRUCTIONS

## SINGLE CYLINDER LIGHTS

### PARTS ENCLOSED

- A. Wire Caps (2x)
- B. Ground Screw
- C. Mounting Screw (2x)
- D. Canopy
- E. Horseshoe Clamp – Crimps on Cord to Hold Pendant at Desired Height
- F. Mounting Plate
- G. Screw Tube
- H. Plastic Grommet
- I. Cord

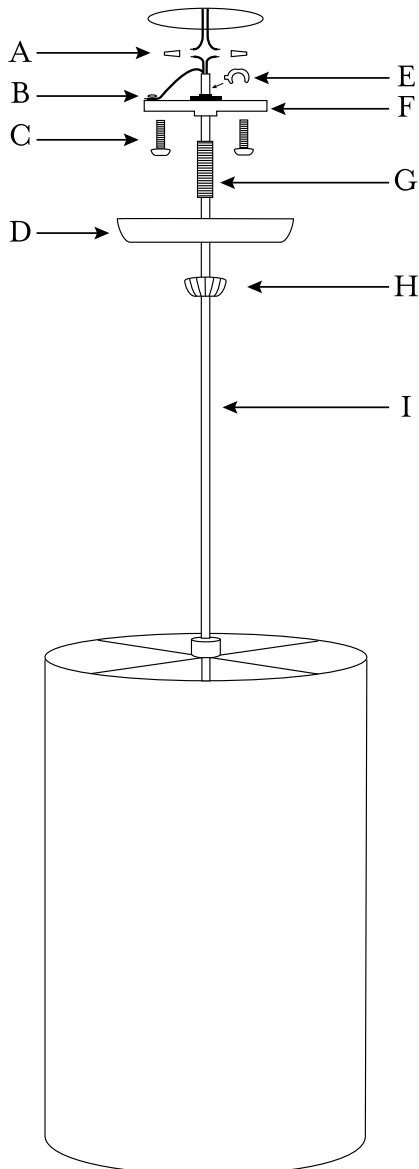

### IMPORTANT SAFETY INSTRUCTIONS:

\*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

### \*DIRECT WIRE FIXTURE: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

Oilo's Double and Large Cylinder fixtures are rated for up to three 60W MAX Type A, medium base bulbs. Bulb(s) are not included. To prevent the risk of fire, do not exceed recommended wattage.

### WARNINGS:

- To reduce the risk of fire, electrical shock or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb(s).
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.
- Do not subject the lamp to any shock while lit as shattering of bulbs may result.

### BEFORE INSTALLATION:

Please note that these instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the light. We strongly suggest that a qualified electrician install all direct-wired fixtures.

### PRE-ASSEMBLY:

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended.

### ASSEMBLY:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY AT THE FUSE BOX / CIRCUIT BREAKER.
2. Carefully unpack all fixture parts and hardware and lay out on a large workspace. Do not throw away any parts.
3. In the following sequence thread the following over the Cord (I): Plastic Grommet (H), Canopy (F), Screw tube (G), and Mounting plate (F).
4. Gently pull down the wiring from the ceiling outlet box and allow the wires to hang.
5. Carefully inspect the lights fixture wires. The neutral fixture wire is white. The hot fixture wire is black. The ground wire is green.
6. Attach the ground wire (green) to the Mounting Plate (F) with the Ground Screw (B) on the Mounting Plate (F).
7. Connect the fixture wires to the ceiling outlet wires (black to black, white to white). Use the Wire Caps (A) to cover exposed wires and wrap connection with black electrical tape. Make sure no wire strands are exposed.
8. Measure desired drop for fixture to hang and clamp Horseshoe Clamp (E).
9. Gently tuck the wire connections neatly into the ceiling outlet box.
10. Attach the Mounting Plate (F) to the ceiling outlet box using the Mounting Screws (C). Tighten using a screwdriver.
11. Pull Canopy (D) up over the Mounting Plate (F). Secure the Canopy (D) to the Mounting Plate (F) with the Plastic Grommet (H).
12. Install (I) 60W MAX Type A, medium base bulbs into sockets. Do not exceed specified wattage.
13. Restore power to the outlet box.

### CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.