





The photograph may not match the reference exactly. Please read the product description to identify the finish.

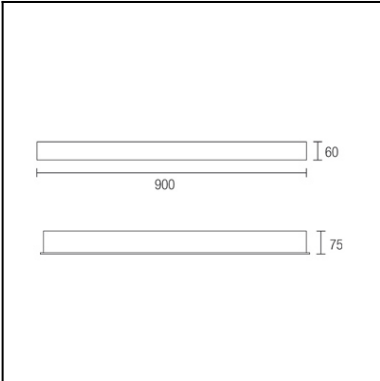


[Download photometric file .ldt /.ies](#)

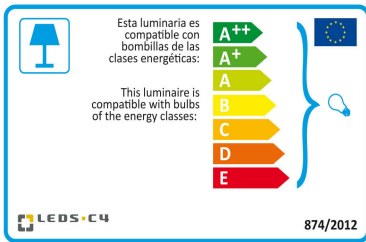

[Click on image to download energy label](#)

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Light source 1:	2 x G5 21W
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	3.295
EAN:	8435111028117



MATERIALS / FINISHES

Structure material:	Steel
Structure finish:	Chrome


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp		
Code	284-CR	Code	283-CR	Code	FH 21 W/830 HE	
Name	Apliq. BREMEN dir/ind 2x21W T5	Name	Apliq. BREMEN dir/ind 2x21W T5	Number	2	
Line	Eulumdat	Date	13-02-2009	Position		
Efficiency	78.61%	Coordinate system	CG	Total Flux	3800.00 lm	
Maximum value	523.45 cd	Position	C=0.00 G=20.00	Asymmetrical		
Rectangular Luminaire	Length	900 mm	Width	75 mm	Height	60 mm
Rectangular Luminous Area	Length	870 mm	Width	45 mm	Height	60 mm
Horizontal Luminous Area	0.039150 m2	Emitting area on Plane 180°		0.052200 m2		
Emitting area on Plane 0°	0.052200 m2	Emitting area on Plane 270°		0.002700 m2		
Emitting area on Plane 90°	0.002700 m2	Glare area at 76°		0.060121 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		3800.00 lm		
Operator	Asselum	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FH 21 W/830 HE	FH 21 W/830 HE - 21.00 W	1900.00	21.00	2
C.I.E.	46 78 96 50 79	D DIN 5040	C31		
F UTE	0.39 E + 0.39 T	B NBN	BZ 5		

900mm x 75mm



C Halfplanes

180.0 — 0.0

270.0 — 90.0

ULOR 39.30 %

DLOR 39.30 %

RN 50.00 %

