



The photograph may not match the reference exactly. Please read the product description to identify the finish.

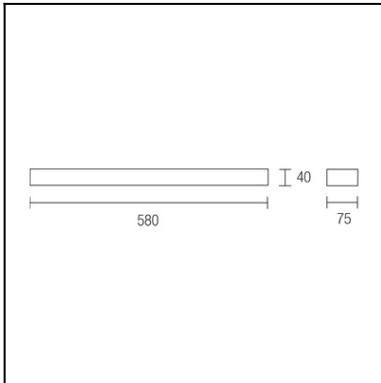

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x G5 14W
Total power consumption (W):	13
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.86
EAN:	8435111079850




MATERIALS / FINISHES

Structure material: Extruded aluminium

Diffuser material: Polycarbonate

Structure finish: Chrome


Diffuser finish: Opal



GEAR

Gear included: Yes, electronic

Download photometric file .ldt / .ies

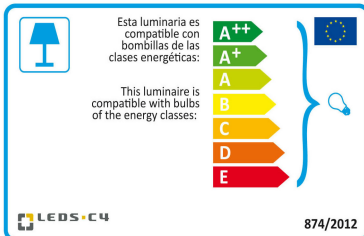


Click on image to download energy label


Luminaire		Measur.		Lamp		
Code	05-4377	Code	05-4377 (SENSE CONO)	Code	FLUORESCENT	
Name	WALL LIGHT	Name	WALL LIGHT	Number	1	
Line	Eulumdat	Date	15-11-2013	Position		
Efficiency	36.93%	Coordinate system	CG	Total Flux	1200.00 lm	
Maximum value	74.70 cd	Position	C=180.00 G=56.00	Asymmetrical		
Rectangular Luminaire	Length	580 mm	Width	40 mm	Height	1 mm
Rectangular Luminous Area	Length	580 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.023200 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.005613 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1200.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						



Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FLUORESCENT	FLUORESCENT - 14.20 W	1200.00	14.20	1
C.I.E.	28 56 80 72 37	D DIN 5040		B11	
F UTE	0.27 J + 0.10 T	B NBN		BZ 7	

580mm x 40mm

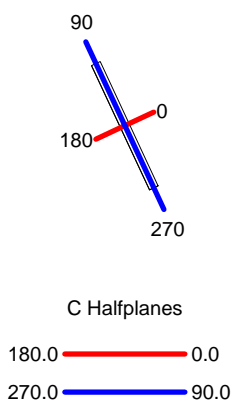

ULOR 10.23 %
DLOR 26.70 %
RN 27.71 %

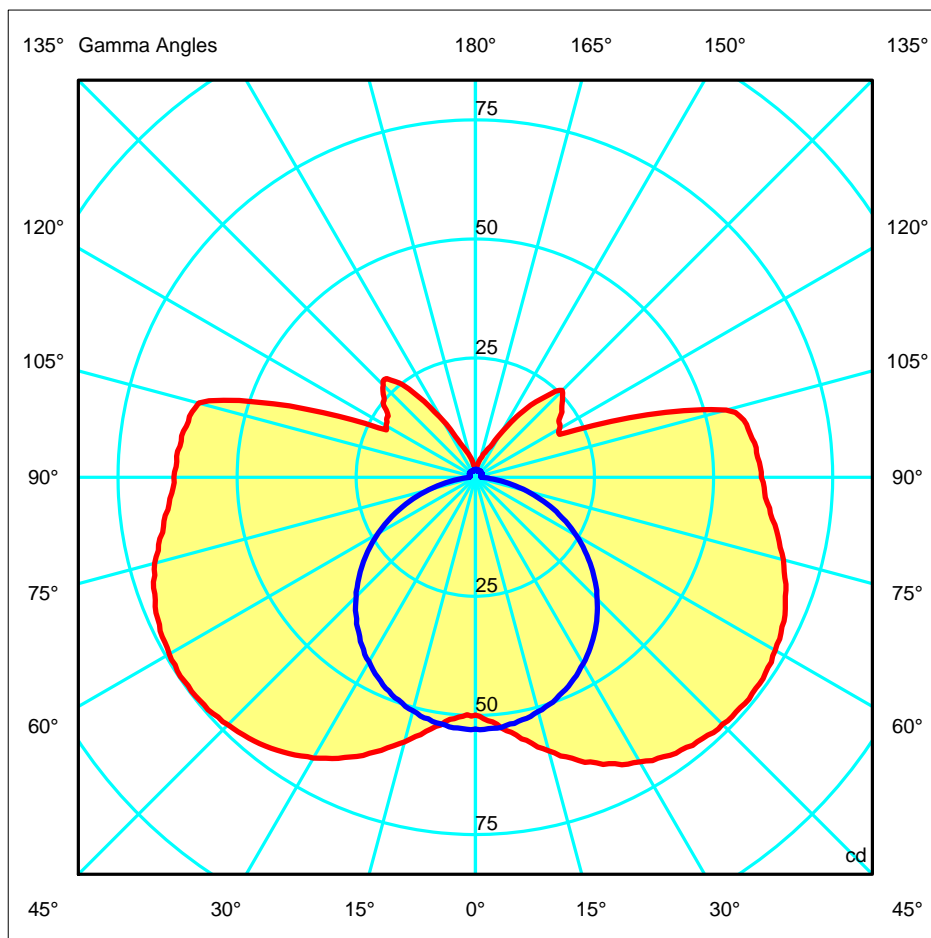

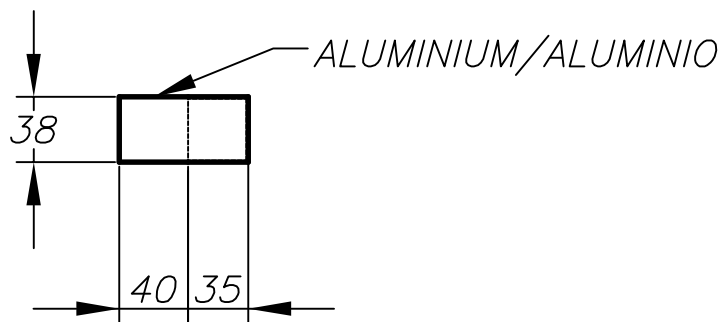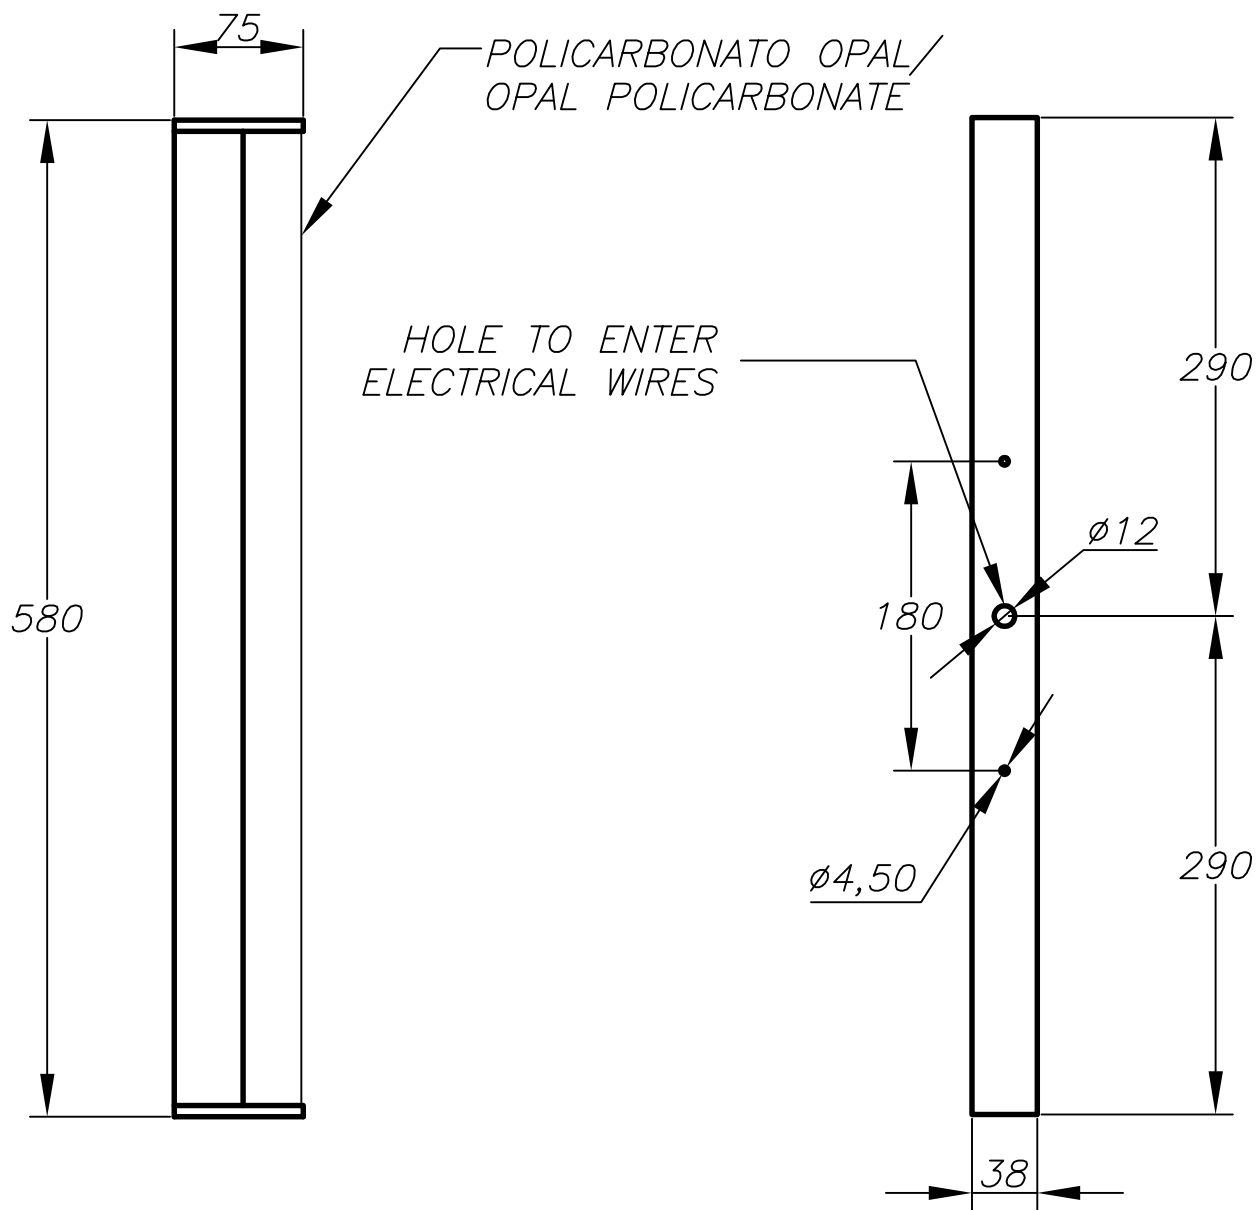



LEBS-C4

IMC 05-4377

