

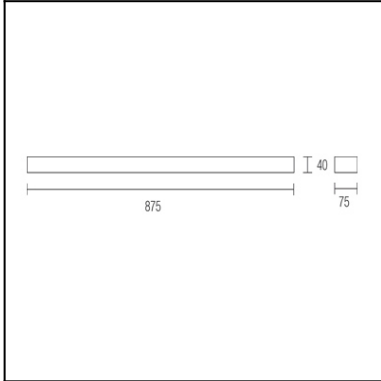


The photograph may not match the reference exactly. Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x G5 21W
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.175
EAN:	8435111079843



MATERIALS / FINISHES


Structure material: Extruded aluminium
Structure finish: Chrome

Diffuser material: Polycarbonate
Diffuser finish: Matt opal

GEAR

Gear included: Yes, electronic

Download photometric file .ldt / .ies

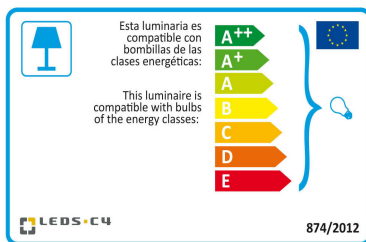


Click on image to download energy label

Luminaire		Measur.		Lamp		
Code	05-4378	Code	05-4378 (SENSE CONO)	Code	FLUORESCENT	
Name	WALL LIGHT	Name	WALL LIGHT	Number	1	
Line	Eulumdat	Date	15-11-2013	Position		
Efficiency	61.01%	Coordinate system	CG	Total Flux	1750.00 lm	
Maximum value	179.66 cd	Position	C=180.00 G=49.00	Asymmetrical		
Rectangular Luminaire	Length	880 mm	Width	40 mm	Height	1 mm
Rectangular Luminous Area	Length	880 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.035200 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.008516 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1750.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FLUORESCENT	FLUORESCENT - 23.30 W	1750.00	23.30	1
C.I.E.	29 57 81 71 61	D DIN 5040		B11	
F UTE	0.43 H + 0.18 T	B NBN		BZ 7	

880mm x 40mm

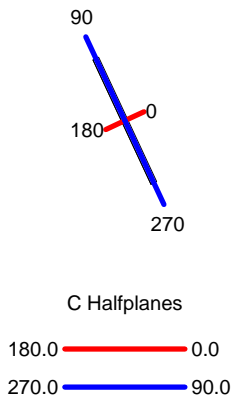

ULOR 17.70 %
DLOR 43.31 %
RN 29.01 %

