




The photograph may not match the reference exactly. Please read the product description to identify the finish.

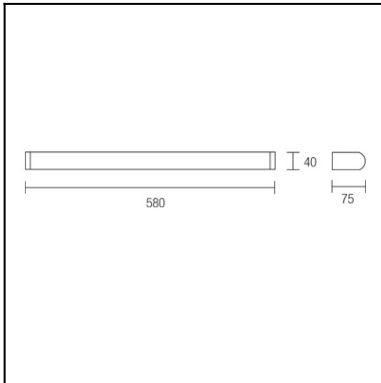

### TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x G5 14W
Total power consumption (W):	15
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.82
EAN:	8435111079874




### MATERIALS / FINISHES

**Structure material:** Extruded aluminium

**Diffuser material:** Polycarbonate

**Structure finish:** Chrome

**Diffuser finish:** Matt opal




$$\eta = 43,37\%$$

### GEAR

Gear included: Yes, electronic

Download photometric file .ldt / .ies

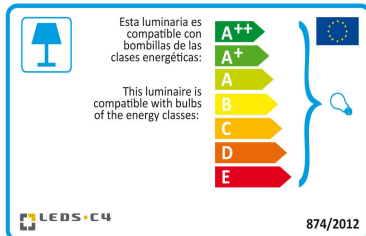


Click on image to download energy label

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>	
Code	05-4375	Code	05-4375 (SENSE CONO)	Code	FLUORESCENT
Name	WALL LIGHT	Name	WALL LIGHT	Number	1
Line	Eulumdat	Date	15-11-2013	Position	
Efficiency	49.05%	Coordinate system	CG	Total Flux	1200.00 lm
Maximum value	100.89 cd	Position	C=180.00 G=54.00	Asymmetrical	
Rectangular Luminaire	Length	580 mm	Width	40 mm	Height
Rectangular Luminous Area	Length	580 mm	Width	40 mm	Height
Horizontal Luminous Area	0.023200 m2	Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.005613 m2	
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		1200.00 lm	
Operator		Source voltage			
Temperature	25.00 °C	Source current			
Humidity	60.00 %	Photocell			
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FLUORESCENT	FLUORESCENT - 22.40 W	1200.00	22.40	1
C.I.E.	29 57 80 76 49	D DIN 5040		B11	
F UTE	0.37 H + 0.12 T	B NBN		BZ 7	

580mm x 40mm



**C Halfplanes**

180.0 — 0.0 (Red line)

270.0 — 90.0 (Blue line)

ULOR 12.01 %

DLOR 37.05 %

RN 24.47 %

