




The photograph may not match the reference exactly. Please read the product description to identify the finish.

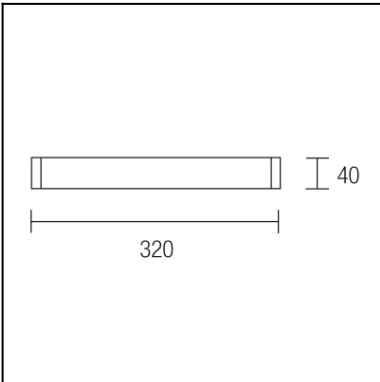


TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x G5 8W
Total power consumption (W):	7.7
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.51
EAN:	8435111079867



[Download photometric file .ldt /.ies](#)

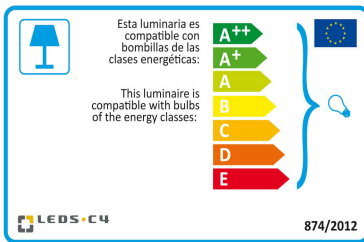

[Click on image to download energy label](#)

MATERIALS / FINISHES

Structure material: Extruded aluminium
Structure finish: Chrome

Diffuser material: Polycarbonate
Diffuser finish: Matt opal


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp		
Code	05-4376-21-M1	Code	448-CR	Code	TL MiniS80p 8W/840	
Name	Aplique 1x8W T5 difusor opal	Name	Aplique 1x8W T5 difusor opal	Number	1	
Line	Eulumdat	Date	31-03-2009	Position		
Efficiency	43.37%	Coordinate system	CG	Total Flux	470.00 lm	
Maximum value	32.65 cd	Position	C=0.00 G=60.00	Double Symmetrical		
Rectangular Luminaire	Length	320 mm	Width	38 mm	Height	77 mm
Rectangular Luminous Area	Length	305 mm	Width	36 mm	Height	36 mm
Horizontal Luminous Area	0.010980 m2	Emitting area on Plane 180°		0.010980 m2		
Emitting area on Plane 0°	0.010980 m2	Emitting area on Plane 270°		0.001296 m2		
Emitting area on Plane 90°	0.001296 m2	Glare area at 76°		0.013310 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		470.00 lm		
Operator	Asselum	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	TL MiniS80p 8W/840	TL MiniS80p 8W/840 - 8.00 W	470.00	8.00	1	
C.I.E.	28 55 79 70 43	D DIN 5040				B11
F UTE	0.30 J + 0.13 T	B NBN				BZ 7

320mm x 38mm

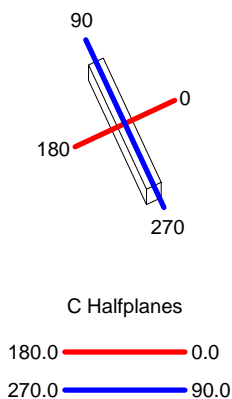

ULOR 12.95 %
 DLOR 30.42 %
 RN 29.86 %

