



TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x 2G11 36W
Total power consumption (W):	34
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	4
Net Weight (Kg):	1.57
EAN:	8435111090343




MATERIALS / FINISHES


Structure material:	Steel	Diffuser material:	Glass
Structure finish:	Chrome	Diffuser finish:	Opal

GEAR

Gear included: Yes, electronic

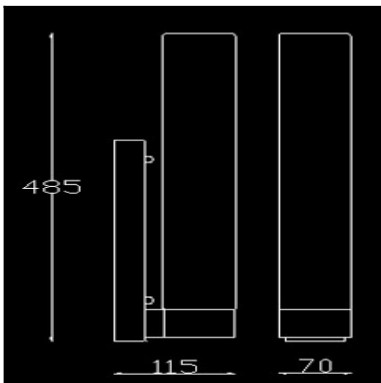

[Download photometric file .ldt / .ies](#)

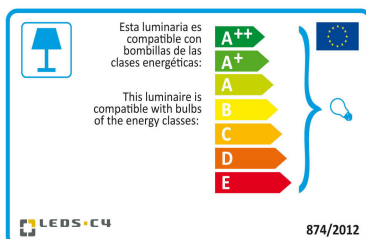


[Click on image to download energy label](#)

Luminaire		Measur.		Lamp		
Code	05-0028	Code	05-0028	Code	FLUORESCENT	
Name	WALL LIGHT	Name	WALL LIGHT	Number	1	
Line	Eulumdat	Date	15-11-2013	Position		
Efficiency	13.43%	Coordinate system	CG	Total Flux	3500.00 lm	
Maximum value	71.19 cd	Position	C=270.00 G=38.00	Asymmetrical		
Rectangular Luminaire	Length	115 mm	Width	70 mm	Height	485 mm
Rectangular Luminous Area	Length	115 mm	Width	70 mm	Height	485 mm
Horizontal Luminous Area	0.008050 m2	Emitting area on Plane 180°		0.055775 m2		
Emitting area on Plane 0°	0.055775 m2	Emitting area on Plane 270°		0.033950 m2		
Emitting area on Plane 90°	0.033950 m2	Glare area at 76°		0.056066 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		3500.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FLUORESCENT	FLUORESCENT - 36.00 W	3500.00	36.00	1
C.I.E.	29 56 79 67 13	D DIN 5040		B11	
F UTE	0.09 J + 0.04 T	B NBN		BZ 7	

115mm x 70mm



C Halfplanes

180.0 — 0.0

270.0 — 90.0

ULOR 4.39 %

DLOR 9.04 %

RN 32.68 %

