



AB2/AB2 HTS INSTALLATION INSTRUCTIONS

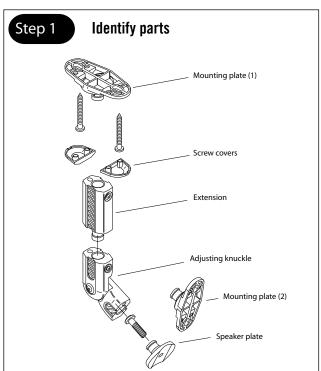

These fasteners and tools are provided

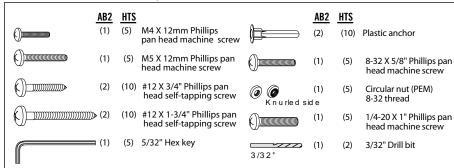

Additional installation tools


Phillips Head Screw Driver

Pencil

Electric Drill


Drill Bits: 1/8" drill bit for drywall


5/16" masonry bit for cement wall applications






Decide on location












Installation of the wall plate


Mounting to drywall.

- 1. Use the wall plate as a template and mark the screw hole locations onto the surface using a pencil.
- 2. Drill into the drywall with a 1/4" drill bit. Insert the anchors into the hole as shown in fig. 3.
- 3. Secure with the $\#12 \times 1-3/4$ " screws, see fig. 4.










Mounting to solid concrete or cinder block.


1. Drill into the surface with a 3/16" masonry drill bit 1-3/4" deep and insert the anchors into the holes as shown in Fig. 3

2. Secure wall plate with the #12 x 1-3/4" , see fig. 4.










Step 3


Installation of wall plate (continued)


Mounting to solid wood or wood studs.


Drill a pilot hole into center of each location using 3/32" drill bit (provided), Drill 1-1/4" into stud. Attach the plate with two #12 x 1-3/4" wood screws.














Step 5

Installation of adjusting knuckle and extension.

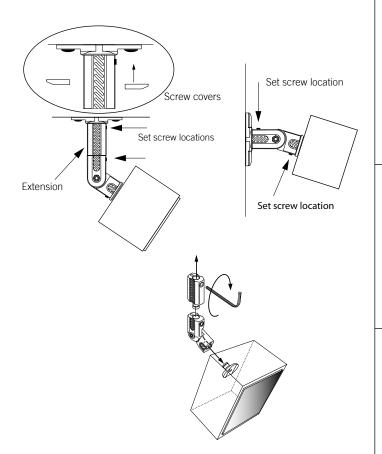



OmniMount Systems, Inc. The Pointe at South Mountain 8201 South 48th Street Phoenix, Arizona 85044-5355 Toll free 1-800-MOUNT-IT (480) 829-8000 Fax: (480)756-9000 email: info@omnimount.com

100% Replacement Warranty
Audio Basics products are engineered and manufactured to the highest standards. In the event that there are defects in materials,

workmanship, or missing parts, OmniMount Systems will, at its discretion, repair or replace your Audio Basics product. Claims that are submitted must include either the sales slip or proof of purchase. If OmniMount products are used for purposes other than their original intent, OmniMount Systems, its distributors and retailers shall not be held responsible or liable for injuries or property damage, direct, indirect or consequential, which may arise from the inability

to use this product safely, properly, and in the manner for which it has been designed and manufactured.


This warranty does not apply to products which have been lost, damaged by misuse, abuse or accident, altered or repaired in any way other than specified by OmniMount Systems, Inc.


This warranty is non-transferable. For installation assistance please call our toll free help line at 1-800-MOUNT-IT

Step 4


Installation of speaker plate onto speaker


1. Bose® speakers with 4мм or 5мм inserts.







2. Speakers with single factory installed threaded insert.






3. Speakers with 2 installed 1/4"-20 or 6мм x 15мм threaded inserts.






4. Speakers with a single keyhole in back. Insert into keyhole and slide upward then tighten.



5. Speakers without mounting holes - wood cabinet only.



Copyright 2004 OmniMount Systems, Inc. All rights reserved. OmniMount products are covered by patents issued and/or pending. "OmniMount" is a registered trademark of OmniMount Systems, Inc. "Audio Basics" is a trademark of OmniMount Systems, Inc. AB-2 revision 2, 1/04 Part #1000254.