



Installation Guide

Single-Control Kitchen Sink Faucets

K-6352



K-6353




M product numbers are for Mexico (i.e. K-12345**M**)
Los números de productos seguidos de
M corresponden a México (Ej.
K-12345**M**)
Français, page “ Français-1”
Español, página “ Español-1”

1025494-2-B

THE BOLD LOOK
OF **KOHLER**®

Tools and Materials

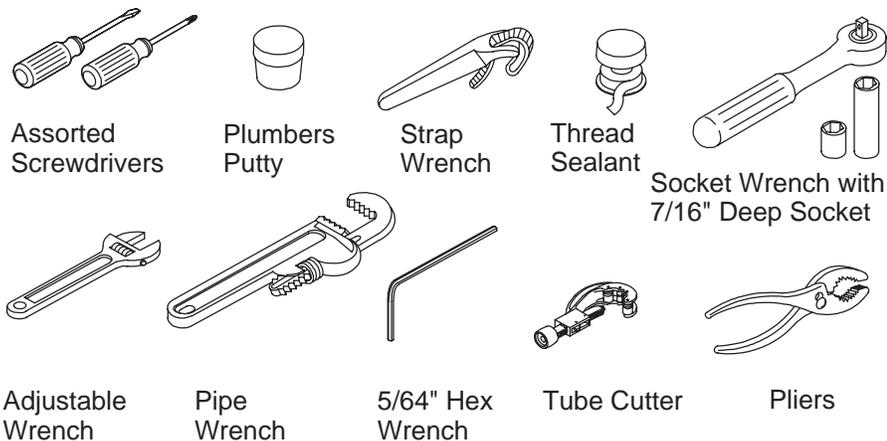


Thank You For Choosing Kohler Company

We appreciate your commitment to Kohler quality. Please take a few minutes to review this manual before you start installation. If you encounter any installation or performance problems, please don't hesitate to contact us. Our phone numbers and web site are listed on the back cover. Thanks again for choosing Kohler Company.

Before You Begin

- Observe all local plumbing codes and building codes.
- Shut off the water supplies.
- Carefully inspect waste and supply tubing for any sign of damage and replace if necessary.
- For new installations, assemble the faucet and drain to the sink before installing it.
- Before installation, unpack the new faucet and inspect it for damage. Return the faucet to the carton until you are ready to install it.
- Do not remove the faucet ground joints, as they contain important back-siphonage protection.
- Do not attach a dishwasher to the faucet spray outlet.
- Kohler Co. reserves the right to make revisions in the design of faucets without notice, as specified in the Price Book.

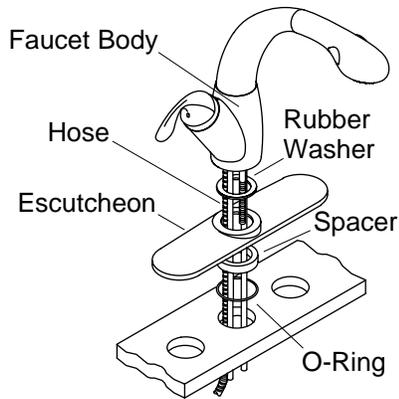

1. Install the Mounting Stud

- Disconnect the hose from the hose connector.
- Screw the mounting stud into the threaded hole at the bottom of the faucet body. The mounting stud should extend slightly beyond the threaded hole in the body.

1. Install the Escutcheon (Optional)


NOTE: For installation on marble, **do not** use plumbers putty. Use the self-adhesive gaskets provided. Remove the paper backing and apply the gaskets (adhesive side down) over the outside holes.

For 1-hole Installations:

- The escutcheon, spacer, and O-ring are not required. Slide the rubber washer over the faucet tubing and hose.
- Insert the faucet tubing and hose into the hole.

For 3-hole Installations:

- Apply a ring of plumbers putty to the underside of the escutcheon according to the putty manufacturer's instructions.
- Insert the O-ring into the groove in the spacer.
- Slide the rubber washer, escutcheon, and spacer (O-ring side down) over the faucet tubing and hose.
- Insert the faucet tubing and hose into the center hole, carefully aligning the escutcheon.
- Press down on the escutcheon and remove any excess putty.

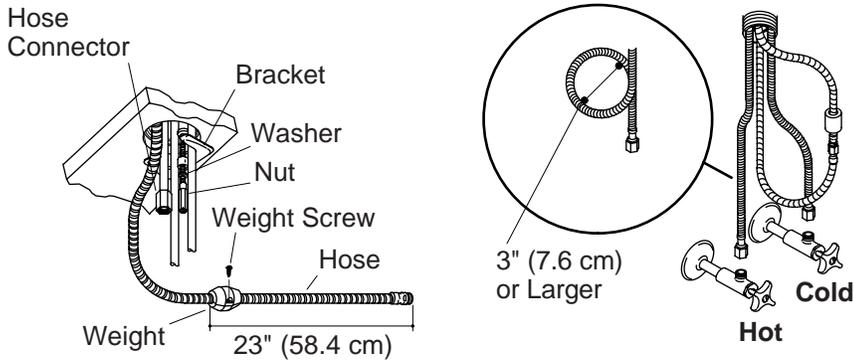

1. Faucet Installation

- ❑ From the underside of the sink, position the bracket, washer and nut onto the mounting stud.
- ❑ Position the faucet and escutcheon on the sink to obtain the desired alignment.
- ❑ Tighten the nut securing the faucet to the sink. For best access, use a socket wrench with a 7/16" deep socket.

NOTE: The weight must be installed to act as a pull stop and to prevent kinking damage to the hose.

- ❑ For best performance, attach the weight to the hose 23" (58.4cm) from the loose end of the hose. The weight may be moved to adjust the pull-out length of the hose.
- ❑ Carefully tighten the weight screws. Do not overtighten.
- ❑ Reconnect the hose to the hose connector.

2. Install the Supplies




CAUTION: Risk of restricted waterflow and product damage. Use extreme care to avoid kinking and twisting when connecting the hoses. Hoses must not be taut when installed.



CAUTION: Risk of back siphonage. Do not remove the ground joints from this faucet. The ground joints contain very important back-siphonage protection. .


Install the Supplies (cont.)

- Install the sink using the sink manufacturer's instructions.
- Connect the supply hoses to the supply stops.
- Tighten all connections.

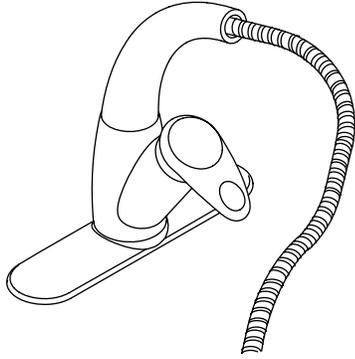

3. Installation Checkout

- Ensure that all coupling nuts are tight.
- Ensure that the lever handle is in the down position.
- Open the drain.
- Remove the sprayhead and screen from the end of the hose. Position the hose in the sink.
- Turn on the main water supply and open the valve for one minute to flush the fitting.
- Reattach the spray and screen. Turn on the water and check for leaks. Adjust as needed.

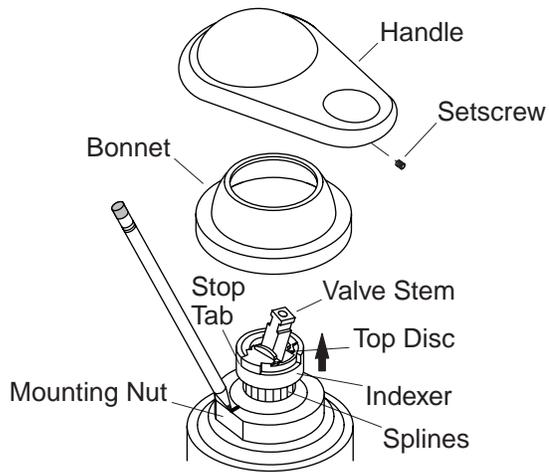

4. Water Temperature Adjustments

NOTE: Prior to adjustment, make sure the handle is in the maximum hot position.

- Remove the setscrew, handle, and bonnet.
- Turn on the water to the maximum temperature by pushing the valve stem up and turning it clockwise.
- Mark the current position of the temperature stop tab (top edge) on the mounting nut with a marker or pencil.
- Lift the indexer and top disc just enough to clear the valve splines and to allow rotation.

NOTE: Each spline notch is an average 9.5_F (5.3_C) change in temperature.

- Turn the indexer, top disc, and valve stem counterclockwise until the desired temperature is achieved.
- Reinstall the indexer and top disc to the valve, making sure the top disc is snapped fully into the indexer.
- Turn off the water by pulling the valve stem down.
- Reinstall the bonnet, handle, and setscrew.

USA: 1-800-4-KOHLER
Canada: 1-800-964-5590
México: 001-877-680-1310

kohler.com

THE BOLD LOOK
OF **KOHLER**®

©2004 Kohler Co.

1025494-2-B