


5' BUBBLEMASSAGE™ BATH K-1357-G

Features

- Acrylic
- 120 BubbleMassage™ airjets
- Drop-in
- Textured bottom surface
- UL listed
- Blower motor with 300 W heater and electronic user control
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

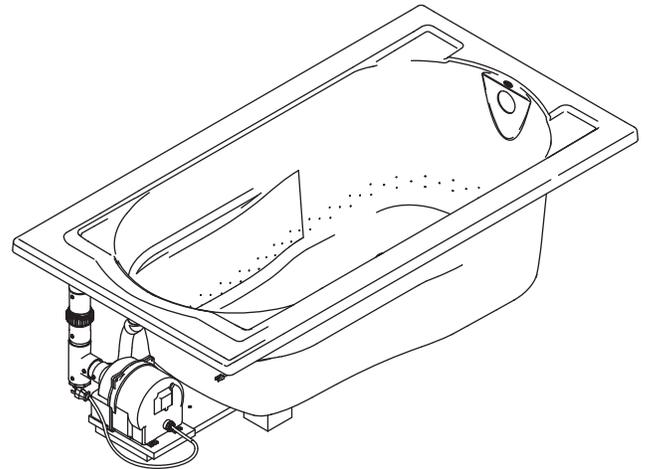

Codes/Standards Applicable

Specified model meets or exceeds the following:

- UL 1795
- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- ASME A112.19.7

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1357-G	5' Bubblemassage bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1446	Remote blower installation kit	<input type="checkbox"/> NA		

Product Specification

The acrylic drop-in Bubblemassage bath shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Bath shall have a blower motor with 300 W heater and an electronic user control. Bath shall feature a textured bottom surface and 120 Bubblemassage airjets. Bath shall be UL listed. Bubblemassage bath shall be Kohler Model K-1357-G-_____.

DEVONSHIRE®

Technical Information

Fixture*:				
Basin area:				
Bathing well	42" (1067 mm) x 20" (508 mm)			
Top area	51" (1295 mm) x 24" (610 mm)			
Weight	84 lbs (38.1 kg)			
To overflow:				
Water depth	14" (356 mm)			
Capacity	60 gal (227.1 L)			
* Approximate measurements for comparison only.				
Drop-in cut-out		58" (1473 mm) x 30" (762 mm)		
Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.	


Installation Notes

NOTICE: If the blower motor and check valve are relocated, the following two procedures are required: 1. Provide two access panels. Locate one access panel at the blower motor/control location and the other access panel at the control box. **2.** Relocate the blower motor and the check valve together. Do not relocate one without the other.

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 47 lbs/square foot (230 kg/square meter) loading.

A blower motor access panel is required.

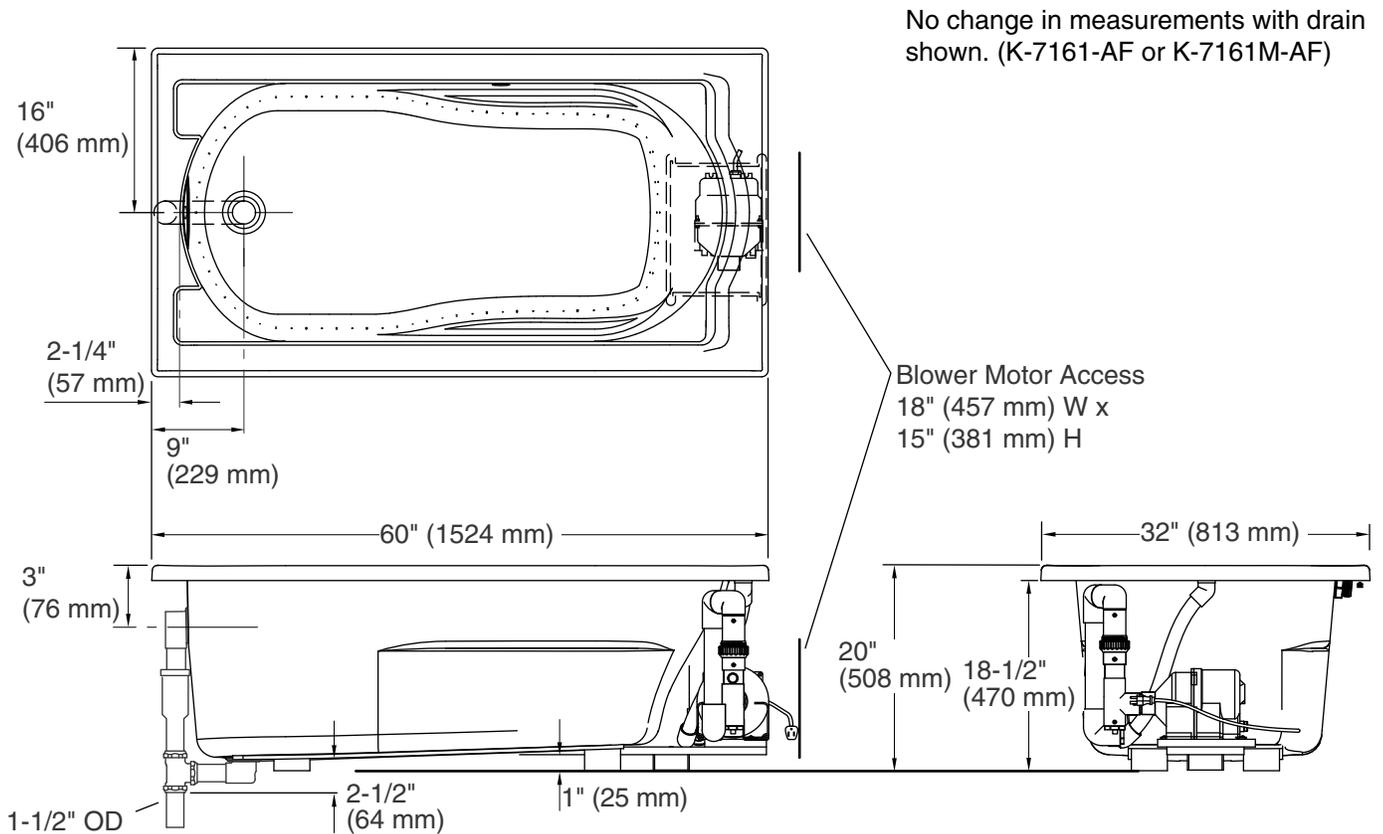

Product Diagram