


Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable ProFlex® hydro-massage jets
- Custom pump locations
- Drop-in
- In-line heater
- Molded lumbar supports and armrests
- Textured bottom surface
- Optional K-9696 whirlpool trim kit in various finishes
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)

BATH WHIRLPOOL WITH CUSTOM PUMP AND HEATER K-1160-HD

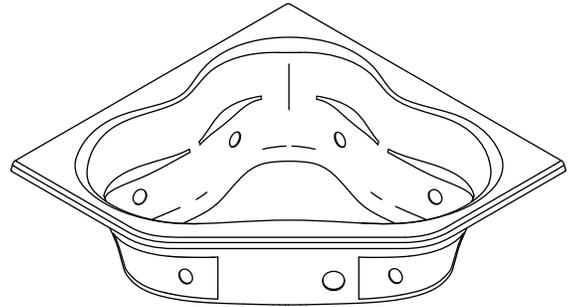

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | | | |
|--------------------------------|--|-----------------------------|-------------------------------------|-----------------------------|-------------------------------------|
| K-1160-HD | Bath whirlpool with custom pump and heater – drop-in (shown) | <input type="checkbox"/> 0 | <input type="checkbox"/> Other_____ | | |
| Recommended Accessories | | | | | |
| K-11677 | Adjustable trip lever bath drain | <input type="checkbox"/> CP | <input type="checkbox"/> PB | | |
| Optional Accessories | | | | | |
| K-1491 | Pillow | <input type="checkbox"/> 0 | | | <input type="checkbox"/> Other_____ |
| K-1601 | Footstop | <input type="checkbox"/> 0 | | | <input type="checkbox"/> Other_____ |
| K-9696 | Jet trim kit (metal finishes) | | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |

Product Specification

The drop-in acrylic bath whirlpool shall be 60" (1524 mm) in length, 60" (1524 mm) in width, and 21" (533 mm) in height. Product shall have 6 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have a textured bottom surface and molded lumbar supports and armrests. Product shall have custom pump locations. Product shall have an optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1160-HD-_____.

TERCET®

Technical Information

| | |
|---|-----------------------------------|
| Fixture*: | |
| Basin area: | |
| Bathing well | 52" (1321 mm) x 38-3/4" (984 mm) |
| Top area | 61" (1549 mm) x 46-1/4" (1175 mm) |
| Weight | 131 lbs (59.4 kg) |
| To overflow: | |
| Water depth | 15" (381 mm) |
| Capacity | 96 gal (363.6 L) |
| * Approximate measurements for comparison only. | |

| | | | | |
|---------|-----|-----|-----|------|
| Pump: | V | Hz | A | |
| 1-speed | 120 | 60 | 7.5 | |
| Heater: | kW | V | Hz | A |
| | 1.5 | 120 | 60 | 12.5 |

| | |
|----------------------------------|---------------------------------|
| Minimum access panel (required): | 20" (508 mm) W x 15" (381 mm) H |
|----------------------------------|---------------------------------|


Required Electrical Service

| | |
|---|--------------------|
| Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI): | |
| Pump/control | 120 V, 15 A, 60 Hz |
| Heater | 120 V, 15 A, 60 Hz |
| Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater. | |

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

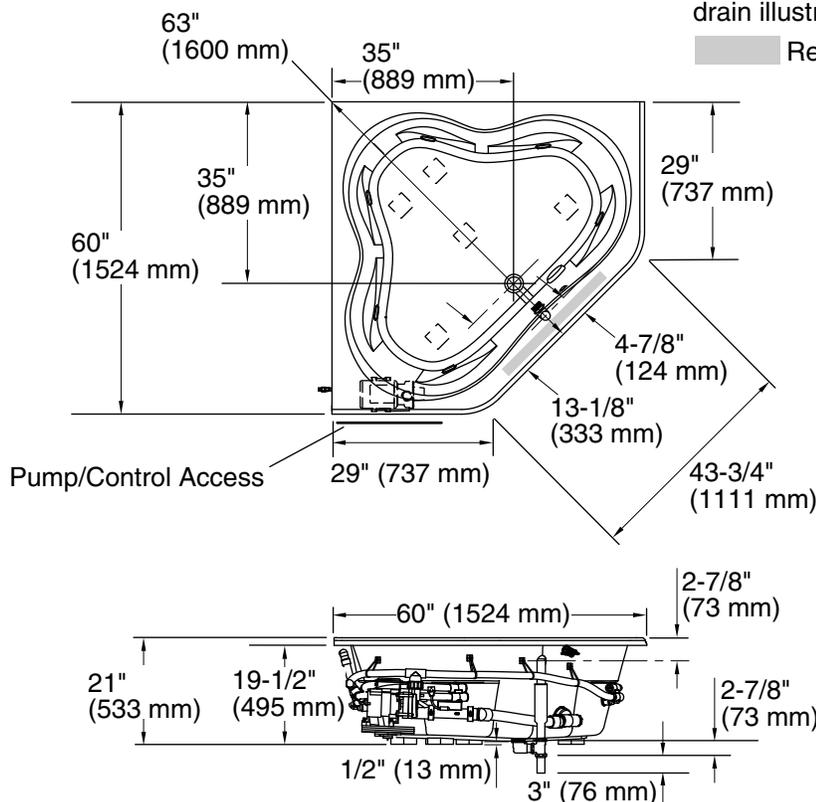


No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)


Recommended faucet area



Drop-In Rim Detail



Drop-In Rim Style Cut-Out Detail



Product Diagram