


BATH WHIRLPOOL K-1160 ALSO K-1160-F

Features

- Acrylic
- 6 individually adjustable ProFlex® hydro-massage jets
- Drop-in
- Molded lumbar supports and armrests
- Textured bottom surface
- Optional K-9696 whirlpool trim kit in various finishes
- Pump with air switch and grounding-type plug-in cord
- Integral tile flange on both sides for corner installation. [K-1160-F]
- 60" (1524 mm) x 60" (1524 mm) x 21" (533 mm)

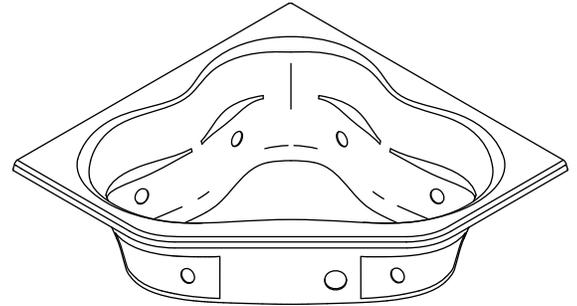

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1160	Bath whirlpool – drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1160-F	Bath whirlpool – integral tile flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories			
K-11677	Adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
Optional Accessories			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB

Product Specification

The drop-in acrylic bath whirlpool shall be 60" (1524 mm) in length, 60" (1524 mm) in width, and 21" (533 mm) in height. Product shall have 6 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, a textured bottom surface, and molded lumbar supports and armrests. Product shall have integral tile flange on both sides for corner installation [K-1160-F]. Product shall have an optional K-9696 whirlpool trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1160-_____ or K-1160-F-_____.

TERCET®

Technical Information

Fixture*:	
Basin area:	
Bathing well	52" (1321 mm) x 38-3/4" (984 mm)
Top area	61" (1549 mm) x 46-1/4" (1175 mm)
Weight	127 lbs (57.6 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	96 gal (363.6 L)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A
1-speed	120	60	7.5

Minimum access panel (required):	20" (508 mm) W x 15" (381 mm) H
----------------------------------	---------------------------------


Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 39 lbs/square foot (189 kg/square meter) loading.

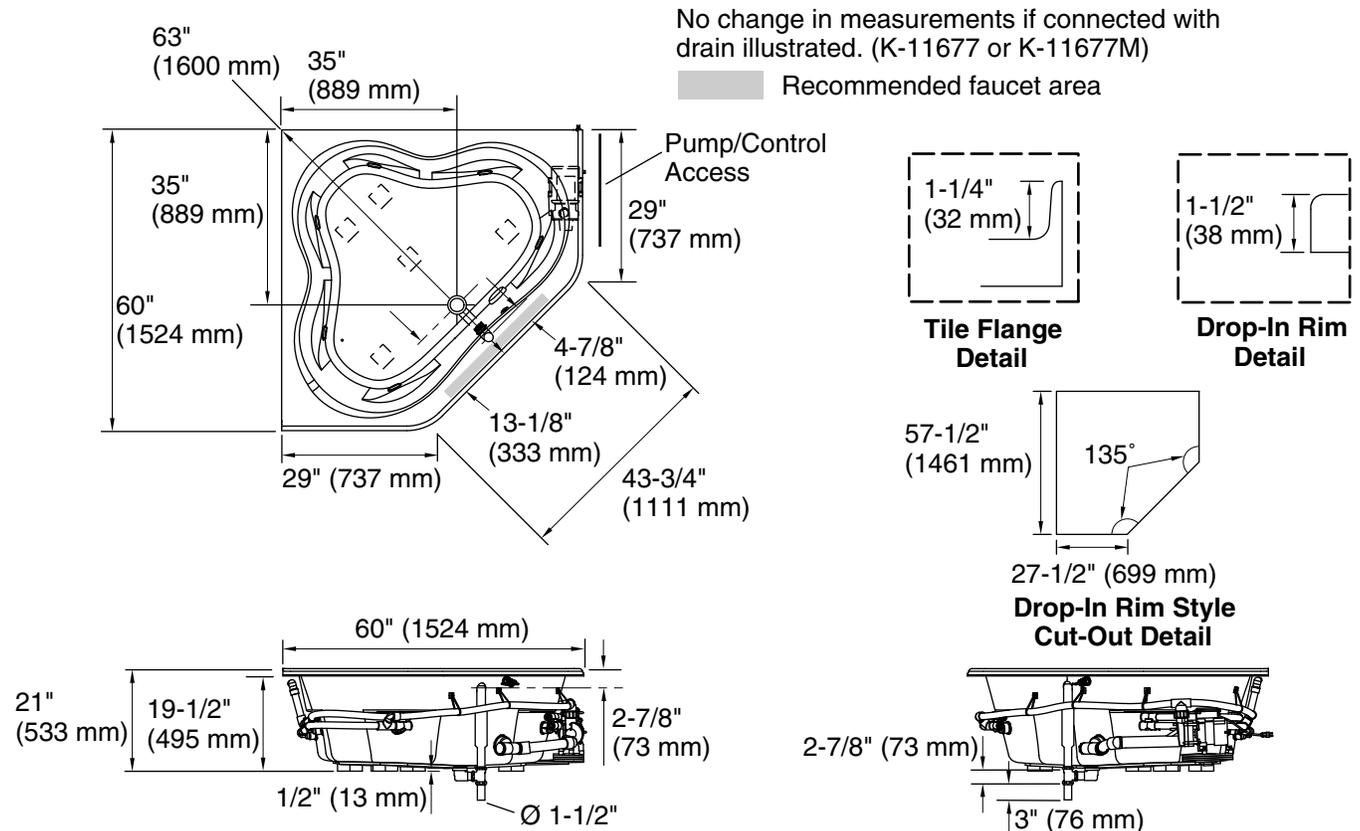

Product Diagram