


Features

- Acrylic
- Variable speed pump with 1.5 kW heater and back-lit user keypad
- 8 Flexjet™ whirlpool jets
- Less all trim
- 66" (1676 mm) x 42" (1067 mm) x 22" (559 mm)

5.5' BATH WHIRLPOOL K-1170-H2

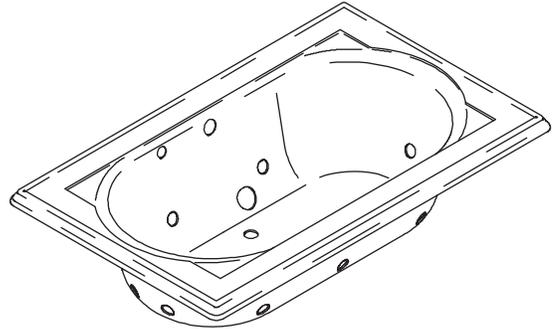

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ASTM E162
- ASTM E662
- UL 1795
- CSA B45.5/IAPMO Z124

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1170-H2	5.5' bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
Recommended Accessories			
K-7161-AF	Pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
Optional Accessories			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1703	Remote control	<input type="checkbox"/> NA	

Product Specification

The acrylic bath whirlpool shall be 66" (1676 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Product shall have 8 Flexjets, a variable-speed pump, a 1.5 kW heater, and back-lit user keypad. Product shall be less all trim. Bath whirlpool shall be Kohler Model K-1170-H2-_____.

MEMOIRS®

Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (1067 mm) x 27" (686 mm)
Top area	54" (1372 mm) x 30" (762 mm)
Weight	134 lbs (60.8 kg)
To overflow:	
Water depth	16" (406 mm)
Capacity	81 gal (306.6 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	64-1/2" (1638 mm) x 40-1/2" (1029 mm)			
-----------------	---------------------------------------	--	--	--

Pump:	kW	V	Hz	A
	1.5	240	50/60	11

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	220/240 V, 20 A, 50/60 Hz

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (212 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This whirlpool is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

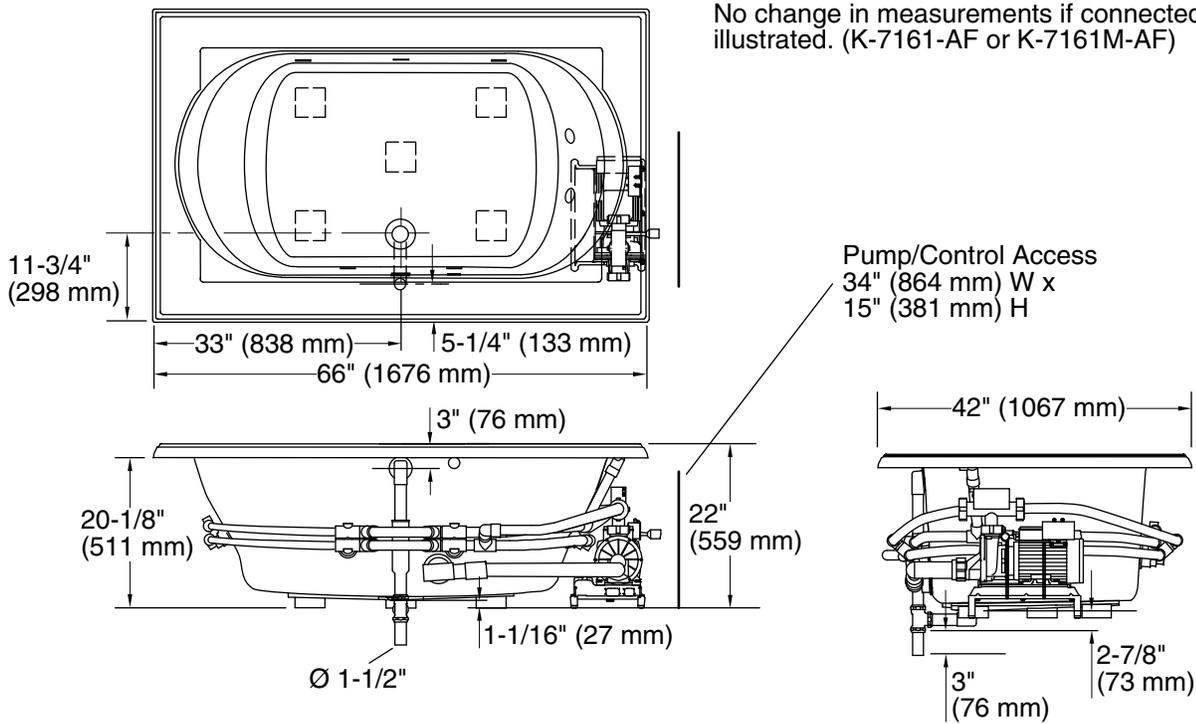

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Product Diagram