

Features

- Fixture-mount design.
- Includes a 9V lithium battery.

Material

- Brass construction.

Technology

- Electronic infrared sensor with Tripoint™ technology for accurate activation.
- Slow-closing piston technology.

Installation

- Intended for urinal installations with 3/4" spud coupling connection.

Optional Accessories

GP1118986 Flushometer Extension Kit



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
CSA B64
CSA B125.3
ASSE 1037
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome

*11-3/8" (289 mm) minimum with a
6" (152 mm) Critical Level (CL) above the fixture

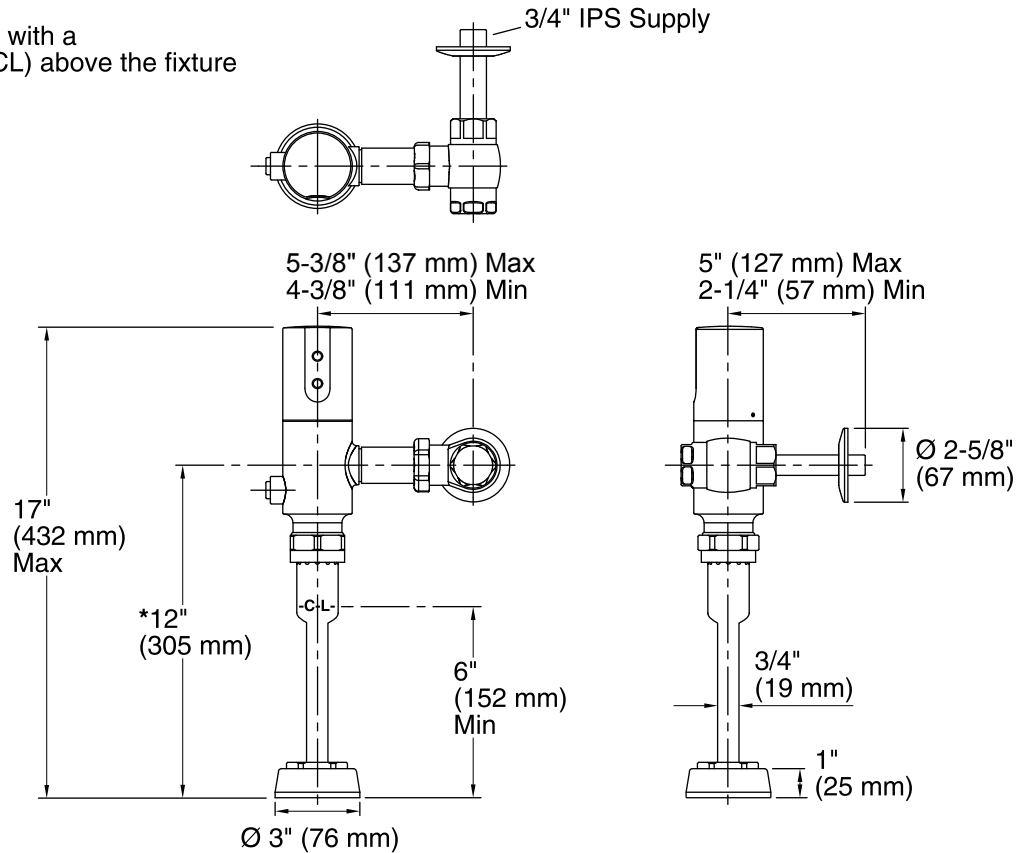

Technical Information

All product dimensions are nominal.

Pressure and Supply Requirements

Faucet:

Flow rate:	0.125 gal/min (0.5 l/min)
Pressure:	45 psi (3.1 bar)
Fixture pressure max (static):	80 psi (551.6 kPa)
Power source:	AA 1.5 V, included

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.