

# KOHLER® Faucets

## Tripoint™ DC 1.0 GPF Flushometer K-10961

### Features

- Fixture-mount design.
- Includes four 1.5 V AA batteries.

### Material

- Brass construction.

### Technology

- Electronic infrared sensor with TriPoint™ technology for accurate activation.
- Slow-closing piston technology.

### Installation

- Intended for urinal installations with 3/4" spud coupling connection.

### Optional Accessories

GP1118986 Flushometer Extension Kit



**ADA** **CSA B651** **OBC**


### Codes/Standards

ASME A112.18.1/CSA B125.1  
CSA B64  
CSA B125.3  
ASSE 1037  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

\*11-3/8" (289 mm) minimum with a  
6" (152 mm) critical level above the fixture

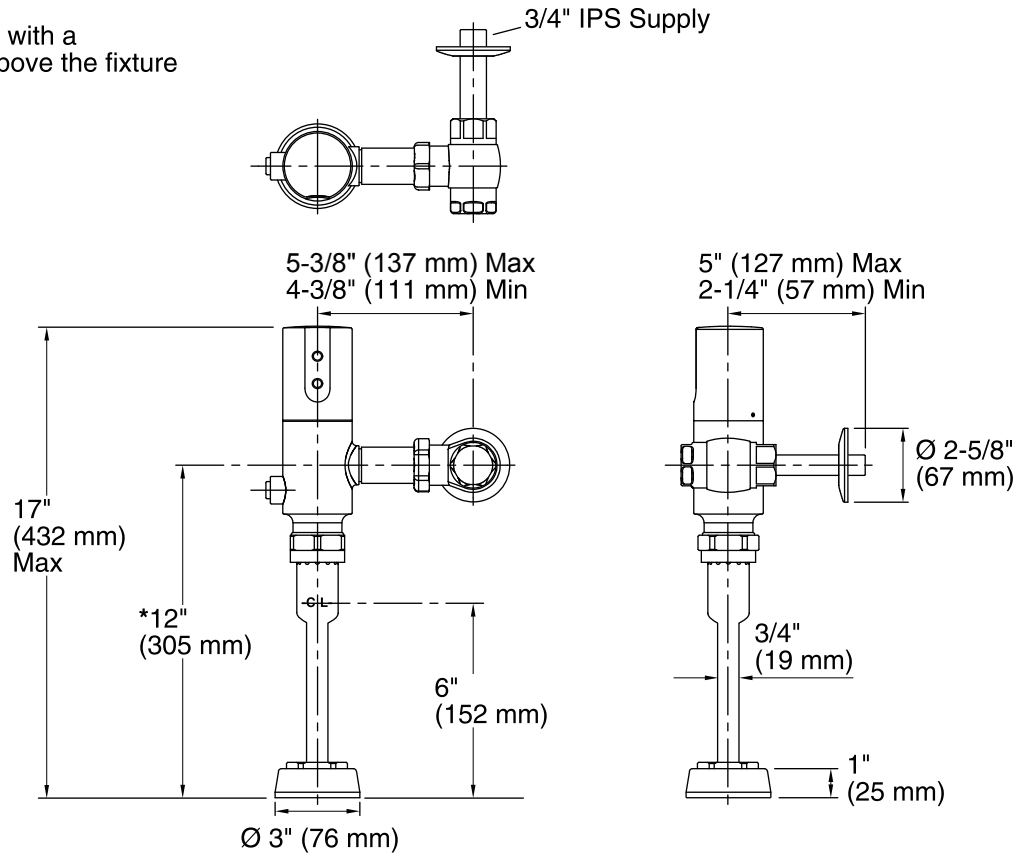

### Technical Information

All product dimensions are nominal.

### Pressure and Supply Requirements

#### Faucet:

Flow rate: 1 gal/min (3.8 l/min)  
 Pressure: 80 psi (5.5 bar)  
 Fixture pressure max (static): 80 psi (551.6 kPa)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.