



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop
- 360° rotating spout

## OPERATION

- Single handle lever
- Operates with less than 5 lbs. of force
- Operates in spray or stream mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

## FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi
- Operates in eco-performance mode by default in aerated and spray stream

## CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets


## STANDARDS

- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- ADA  for lever handle

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installation

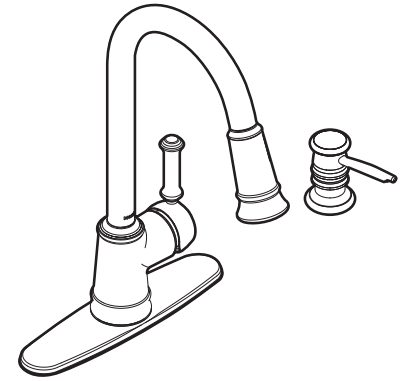

## Single Handle High Arc Pulldown Kitchen Faucet

Model: CA87012 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

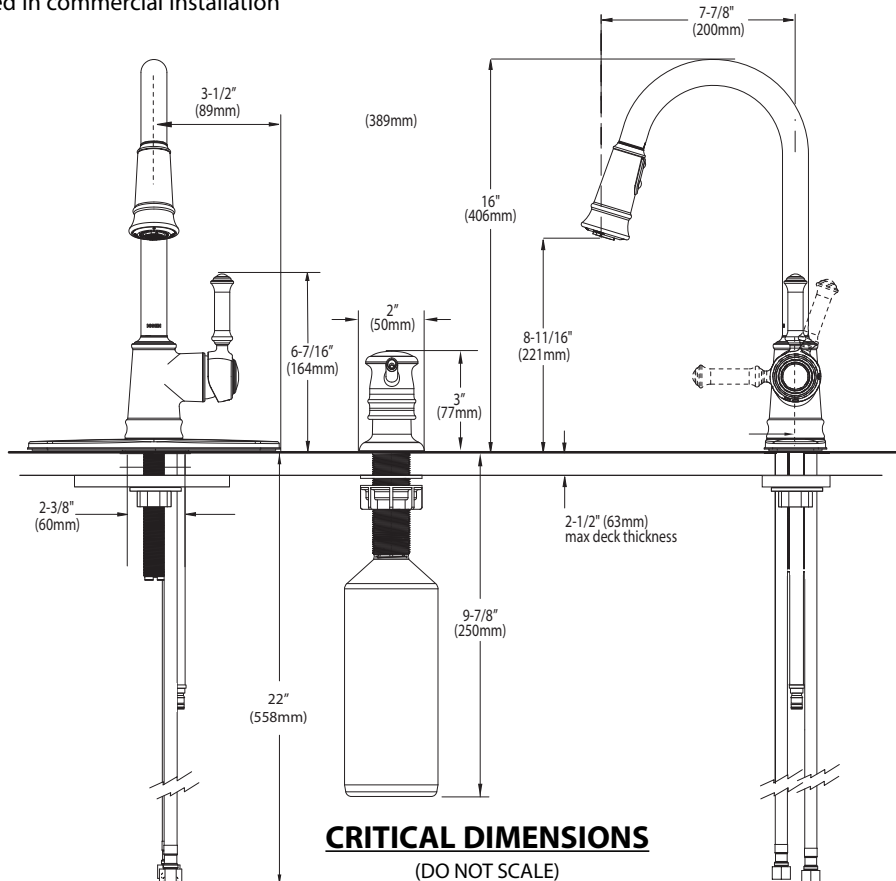

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN  
www.moen.com