


CATALOG NUMBER	TYPE
PROJECT	

SOLORAIL™ - COMPONENTS

REMOTE POWER FEEDS

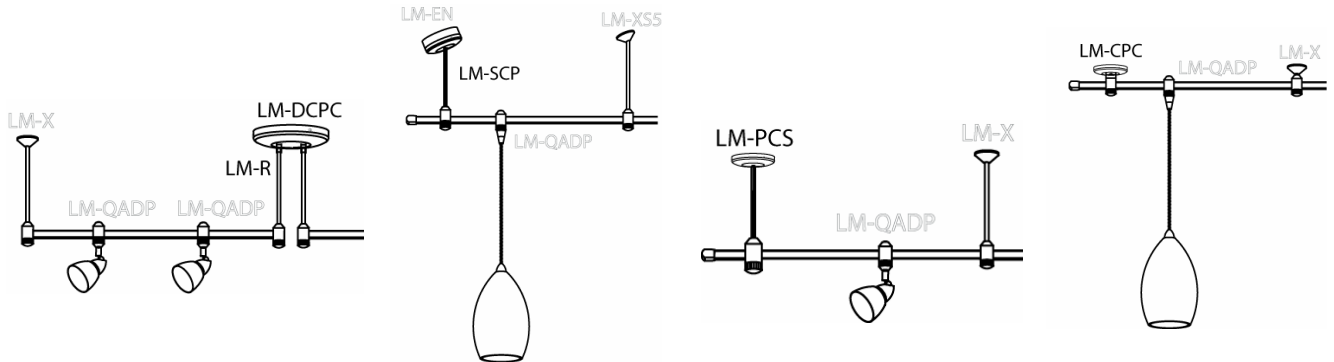

Ordering Matrix		
Model	Part Number	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>
LM	CPC DCPC PCS (length) SCP (length)	DB CH BN

Ordering Example (model number – part number – finish): LM-CPC-BN

Power Feeds			
Remote Power Feed Suspension: LM-CPC-color		Dual Remote Power Feed Suspension: LM-DCPC-color	
Description		Description	
Rigid feed that provides power to the Solorail™ system from a remote transformer. Standard LM-CPC height matches the LM-X3 suspension standoff height. The LM-CPC standoff height can be increased by the use of two LM-R extension rods. 4 1/2" canopy. Designed to cover a standard junction box. 25A max. Used for either 12v or 24v Solorail™ systems. Available in Dark Bronze (DB), Chrome (CH), and Brushed Nickel (BN).		Rigid feed that provides power to two Solorail™ systems from a remote transformer. The two system rails can only be connected together by using an LM-IDEC I-Connector. Standard LM-DCPC height matches the LM-X3 suspension standoff height. The LM-DCPC standoff height can be increased by the use of four LM-R extension rods. 5" canopy. Designed to cover a standard junction box. 25A max. Used for either 12v or 24v Solorail™ systems. Available in Dark Bronze (DB), Chrome (CH), and Brushed Nickel (BN).	
Cable Suspension Power Feed: LM-PCS48-color LM-PCS96-color		Sloped Ceiling Power Feed: LM-SCP48-color LM-SCP96-color	
Description		Description	
Flexible feed that provides power to the Solorail™ system from a remote transformer. Can be used in flat or sloped ceiling applications. The LM-CPC length can be field shortened. 4 1/2" canopy. Designed to cover a standard junction box. 25A max. Used for either 12v or 24v Solorail™ systems. Available in Dark Bronze (DB), Chrome (CH), and Brushed Nickel (BN).		Flexible feed cable that provides power to the Solorail™ system from a surface mount transformer. Can be used in flat or sloped ceiling applications. The LM-SCP length can be field shortened. 25A max. Used for either 12v or 24v Solorail™ systems. Available in Dark Bronze (BZ), Chrome (CH), and Brushed Nickel (BN).	