


HR-3LED-T418

3.5" Tesla™ LED 30°-45° Adjustable Trim

WAC LIGHTING

Responsible Lighting®

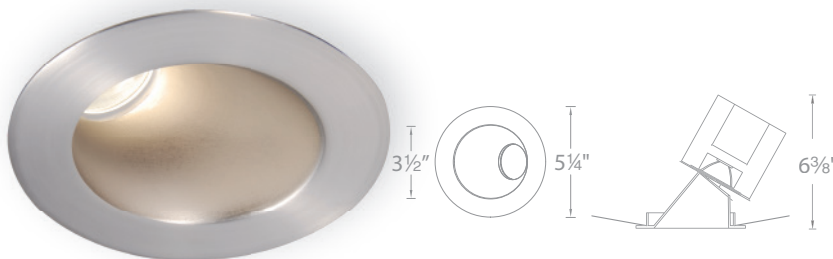

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, round 30° to 45° adjustable trim with interior open reflector.

FEATURES

- 3.5" aperture
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W




Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR-3LED-T418 30° to 45° Adjustable	S 15°	27 2700K	85	645	1340	BN Brushed Nickel  CB Copper Bronze  WT White 
		W 3000K	85	685	1578	
		9W 3000K	90	630	1561	
		35 3500K	85	725	1705	
		C 4000K	85	725	1543	
	N 28°	27 2700K	85	690	2099	
		W 3000K	85	745	2341	
		9W 3000K	90	685	2072	
		35 3500K	85	750	2366	
		C 4000K	85	765	2540	
	F 41°	27 2700K	85	660	3617	
		W 3000K	85	760	4034	
		9W 3000K	90	699	2717	
		35 3500K	85	755	4238	
		C 4000K	85	735	4201	

HR-3LED-T418 - -

Example: HR-3LED-T418F-C-BN

COMPATIBLE HOUSINGS See individual housing spec sheets for complete information.

New Construction

HR-3LED-H18D1-ICA Narrow, IC-Rated, Airtight	120V -277V	HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-ICA IC-Rated, Airtight	120V -277V	HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery	120V	HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery	277V

Remodel

HR-3LED-R22D Non-IC	120V -277V
-------------------------------	------------

REPLACEMENT MODULES

Reflectors

Spot	SL-REF-LUX10-S
Narrow Flood	SL-REF-LUX10-N
Flood	SL-REF-LUX10-F

LED

2700K	85 CRI	LXS8-PW27
3000K	85 CRI	LXS8-PW30
3000K	90 CRI	LXS9-PW30
3500K	85 CRI	LXS8-PW35
4000K	85 CRI	LXS8-PW40

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760