
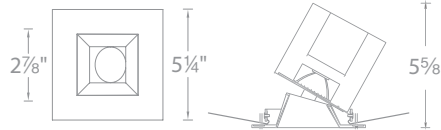


HR-3LED-T518

3.5" Tesla™ LED Square 0-30° Adjustable

WAC LIGHTING

Responsible Lighting®

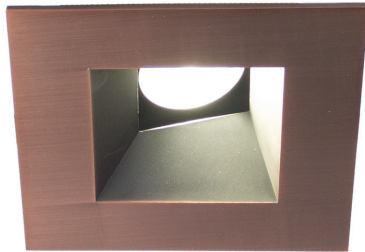

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, square 0° to 30° adjustable trim with interior open reflector

FEATURES

- 3.5" aperture
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR-3LED-T518 0° to 30° Adjustable	S 15°	27 2700K	85	775	3885	BN Brushed Nickel CB Copper Bronze WT White
		W 3000K	85	830	4395	
		9W 3000K	90	765	4045	
		35 3500K	85	845	4175	
		C 4000K	85	745	4130	
	N 28°	27 2700K	85	815	2015	
		W 3000K	85	855	2115	
		9W 3000K	90	785	1945	
		35 3500K	85	875	2190	
	F 50°	27 2700K	85	785	1105	
		W 3000K	85	865	1195	
		9W 3000K	90	795	1100	
35 3500K		85	860	1205		
		C 4000K	85	790	1170	

HR-3LED-T518 - -

Example: HR-3LED-T518N-C-CB

COMPATIBLE HOUSINGS See individual housing spec sheets for complete information.

New Construction

HR-3LED-H18D1-ICA Narrow, IC-Rated, Airtight	120V-277V	HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum	120V-277V
HR-3LED-H18D-ICA IC-Rated, Airtight	120V-277V	HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum	120V-277V
HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery	120V	HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery	277V
HR-3LED-H18D-A New Construction Non-IC, Airtight	120V-277V		

REPLACEMENT MODULES

Reflectors

Spot	SL-REF-LUX10-S
Narrow Flood	SL-REF-LUX10-N
Flood	SL-REF-LUX10-F

LED

2700K	85 CRI	LXS8-PW27
3000K	85 CRI	LXS8-PW30
3000K	90 CRI	LXS9-PW30
3500K	85 CRI	LXS8-PW35
4000K	85 CRI	LXS8-PW40

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760