

CATALOG NUMBER	TYPE
PROJECT	


LOW VOLTAGE HALOGEN BUTTON LIGHT **HR-88**



Surface Mounted



Recessed Mounted

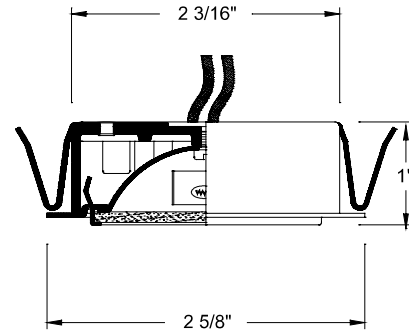

Ordering Matrix						
Model	Series	Finish				
[]	[]	[]				
HR	88	BK	BN	CH	PB	WT

Ordering Example (model number – series – finish): HR-88-CH

Product Details	Specification Features
<p>Description: Round surface or recessed mount button light suitable for wood surfaces such as cabinets and displays. Used as a surface mounted unit with the supplied outer housing or used as a recessed unit by removal of the outer housing.</p> <p>Materials: Cast aluminum inner housing with a decorative outer steel housing included for surface mounting; outer housing is discarded when used as a recessed fixture. The socket is a bi-pin ceramic with 18 gauge teflon insulated wires. Supplied with 72" lead wire, bi-pin xenon lamp and clear glass lens.</p> <p>Transformer: Remote class II required. Ordered separately.</p> <p>Lamping: Low voltage halogen bi-pin JC-20-12v (20W) included.</p> <p>Cutout: 2 3/8"</p> <p>Accessories: Frosted Lens available, ordering code = LENS-45-FR</p> <p>Listing: UL & CUL Listed.</p>	<ul style="list-style-type: none"> Available in a choice of five abrasion resistant paint finishes; <ul style="list-style-type: none"> BK = Black BN = Brushed Nickel CH = Chrome PB = Polished Brass WT = White Versatile choice for low profile source lighting. Not intended for ceilings. Dimmable with electronic low voltage dimmers. 2 year W.A.C. Lighting product warranty.

Compatible Class II Transformers (sold separately):

<p>EN-1260-R2</p> <p>Electronic Transformer UL Listed Class II Component 120v input – 12v output 60 watt maximum</p>		<p>EN-1260-RB2</p> <p>Electronic Transformer UL Listed Class II 120v input – 12v output 60 watt maximum</p>		<p>EN-1260-P-AR</p> <p>Electronic Transformer UL Listed Class II 120v input – 12v output 60 watt maximum</p>	
--	---	---	--	--	---