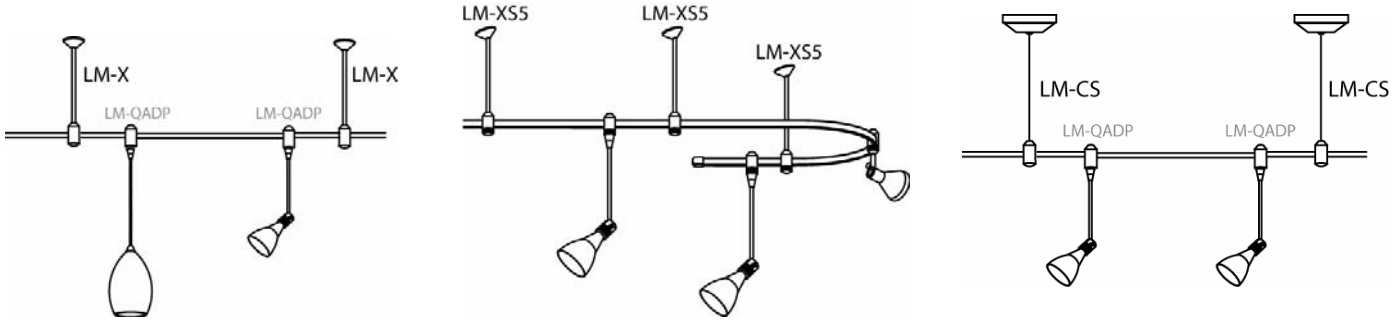






CATALOG NUMBER	TYPE
PROJECT	

MONORAIL – COMPONENTS **SUSPENSION**



Ordering Matrix		
Model	Part Number	Finish
LM	X (length) XS (length) TB (length) CS (length)	BZ CH PT

Ordering Example (model number – part number – finish): LM-CS48-CH

Track Suspension Connectors			
Standard Ceiling Standoff LM-X3-color LM-X4-color LM-X5-color		T-Bar Ceiling Standoff LM-TB3-color LM-TB4-color LM-TB5-color	
Description Rigid suspension support for monorail system. Compatible with plaster, panel, and wood type ceilings. Use two per 4' section of rail and three per 8' section. More supports should be used on installations with complex or frequent curves. Available in 3", 4 1/2", and 5 3/4" lengths. Two LM-X's can be combined to make a longer drop with the addition of an LM-RI coupler. Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).		Description Rigid suspension support for monorail system. Used on T-Bar ceiling installations where the mounting point will be on the T-Grid itself. Use two per 4' section of rail and three per 8' section. More supports should be used on installations with complex or frequent curves. Available in 3", 4 1/2", and 5 3/4" lengths. Two LM-TB's can be combined to make a longer drop with the addition of the LM-RI coupler. Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).	
Sloped Ceiling Standoff LM-XS5-color		Aircraft Cable Standoff LM-CS48-color LM-CS96-color	
Description Rigid suspension support for monorail system. Used on sloped ceilings. Compatible with plaster, panel, and wood type ceilings. Use two per 4' section of rail and three per 8' section. More supports should be used on installations with complex or frequent curves. Available in a 5 3/4" length. Two LM-XS5's can be combined to make a longer drop with the addition of the LM-RI coupler. Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).		Description Flexible suspension support for monorail system. Compatible with plaster, panel, and wood type ceilings. Can be used on sloped ceilings. Use two per 4' section of rail and three per 8' section. More supports should be used on installations with complex or frequent curves. Available in 48" and 96" lengths. Can be field shortened without the need for any additional parts. Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).	