




WAC LIGHTING
Responsible Lighting

615 South Street
Garden City, NY 11530
Tel: 516-515-5000 Fax: 516-515-5050
www.waclighting.com

CATALOG NUMBER	TYPE
PROJECT	

LEDME™ PENDANT **QUEST**

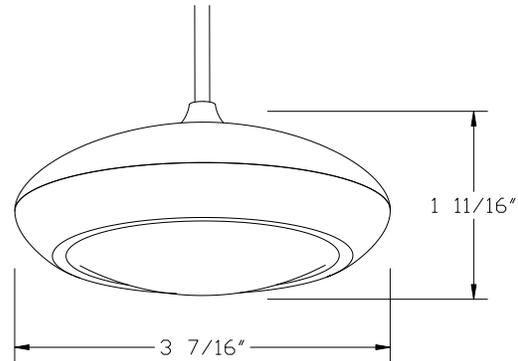

Ordering Number for Canopy Application			
Model Number	Finishes		
MP-LED314	BN/BN	BN/CH	BN/DB

Ordering Matrix for Solorail™/Duorail™ Application			
Model Number	Finish of Pendant and Quick Connect™ Adapter (to match rail)		
[]	[]	[]	[]
QPLED314	BN	BN/CH	BN/DB

Ordering Examples (model number /adapter finish): QPLED314-BN

Product Details	
Description:	Energy efficient LEDme™ Pendant in a modern, streamline design and an elegant Brushed Nickel finish. Easy installation and height adjustment.
Compatible Systems:	MP pendant must use MP-LED05M-BN canopy (included). QP pendant is compatible with 12V Solorail™ and Duorail™ systems.
LED Engine:	Input power: 4.5W Input Voltage: 12V AC Fixture lumen: 200 lm Color temperature: 3000K CRI: 85
Dimming	Dimmable MP pendant with electronic low voltage dimmer. Dimmable QP pendant with electronic low voltage dimmer when using a magnetic transformer.
Materials:	Die-cast aluminum construction, glass convex lens and six feet of a low voltage braided wire
Finish:	BN - Brushed Nickel
Listing:	UL & CUL Listed. 5 year WAC lighting product warranty

Specification Features
<ul style="list-style-type: none"> LED pendant comes with 6 feet of cable and may be field adjusted to any length. Free of projected heat, IR, and UV Dimmable with ELV dimmer (Range from 100% to 15%) 50,000 hour lifetime Replaceable LED module