


modular new york medium outdoor

DESCRIPTION

Wall mounted specification grade luminaire. IP67 rated. \hat{A} Inner assembly constructed of extruded aluminum with a tempered glass cover. \hat{A} A double coat of epoxy primer and polyester powder-coating mean durability even in harsh outdoor conditions. \hat{A} The outer decorative cover is constructed of stainless steel. \hat{A} The brushed steel finish includes silver luminaire and has been electrophoretically coated which not only enhances the beauty of the finish, but also increases surface durability and helps to protect against damaging environmental conditions. \hat{A} The bronze finish includes bronze luminaire and utilizes a polyester powder coat paint to help protect against damaging environmental conditions. \hat{A} Mounts vertically only. \hat{A} Available in two fluorescent lamping options (lamps included): (2) 24 watt mini bi-pin base T5 high output linear fluorescent lamps, or (2) 17 watt bi-pin base T8 linear fluorescent lamps. Emergency ballast option also available. 120v or 277v.

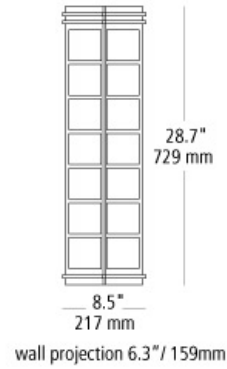

WEIGHT

20.60lb / 9.34kg \pm

ORDERING INFORMATION

model	finish	lamp	wet location
PW529	BZ bronze	17L1HB T8 bi-pin 2x17w 120v Emergency Ballast	W wet location
	SS stainless steel	17L1HE T8 bi-pin 2x17w 120v	
		17L2HB T8 bi-pin 2x17w 277v Emergency Ballast	
	17L2HE T8 bi-pin 2x17w 277v		
	24L1HB T5HO mini bi-pin 2x24w 120v Emergency Ballast		
	24L1HE T5HO mini bi-pin 2x24w 120v		
	24L2HB T5HO mini bi-pin 2x24w 277v Emergency Ballast		
	24L2HE T5HO mini bi-pin 2x24w 277v		

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



7400 Linder Avenue
Skokie, Illinois 60077

T 847.626.6300
F 847.626.6350

www.lblighting.com



©2013 LBL Lighting. All Rights Reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.