

Icicle II (Compact Fluorescent Version)

PF397OP_18T

1.0



GENERAL PRODUCT INFORMATION:




This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for indoor dry locations only.




CAUTION - RISK OF FIRE
This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**

Install the Lamp and Glass Shade

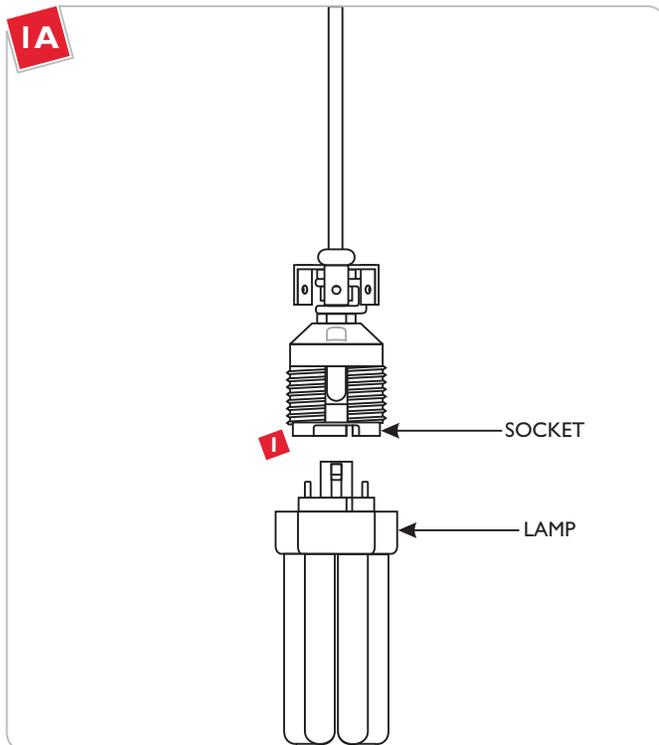


CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

Use **MAX 18** Watt Type Triple Tube GX24Q2 Base Compact Fluorescent Lamp.



- 1** Push the lamp pins completely into the socket holes.

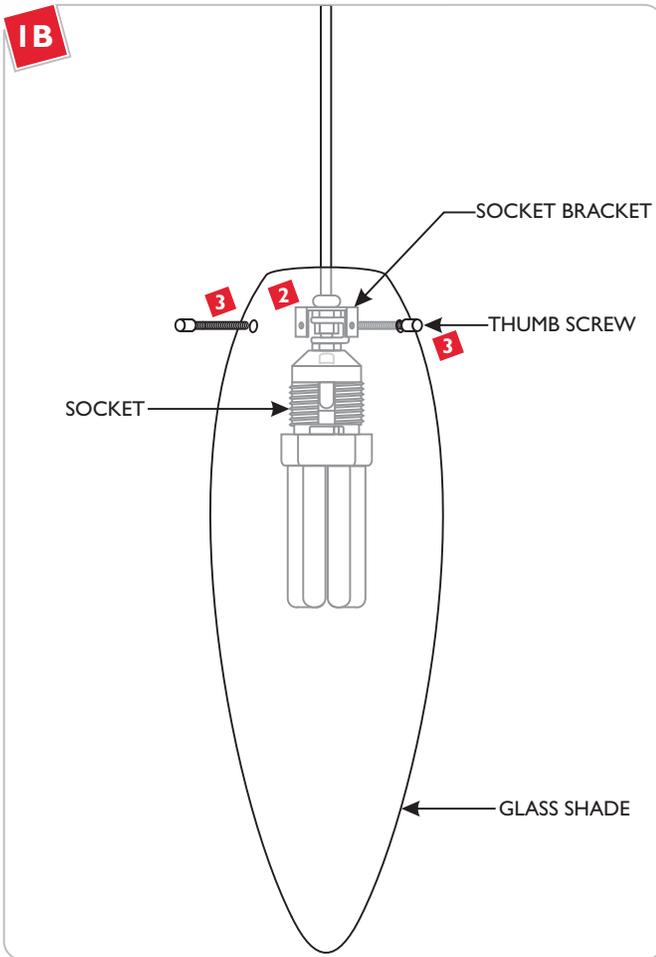

- 2 Place the glass shade onto the socket bracket and align the glass shade holes with socket bracket holes.
- 3 Tighten the three thumb screws through the glass shade holes completely into the socket bracket holes to secure the glass shade in place.

NOTE: Do not over tighten the thumb screws which may cause the glass shade to break.

- 4 Refer to the instructions provided with the canopy to install the fixture.

NOTE: To replace the lamp, remove the thumb screws to remove the glass shade and lamp, and repeat steps 1 through 3.

SAVE THESE INSTRUCTIONS!

 **LBL Lighting**

7400 Linder Ave, Skokie, IL 60077
800.323.3226 - 847.626.6300

www.lblighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company