

Wall Sconces

GENERAL PRODUCT INFORMATION:



This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for indoor dry locations only.


This product can be dimmed with a standard incandescent dimmer.

CAUTION - RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN THE POWER TO THE ELECTRICAL BOX OFF.




Install the Fixture

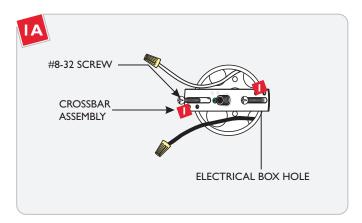

Mount the crossbar assembly to the electrical box holes with the two #8-32 screws provided.

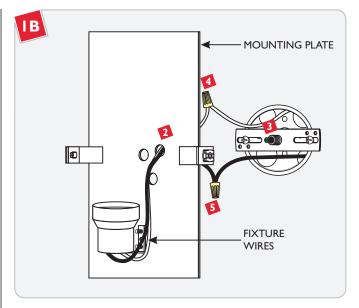


- 2 Feed the fixture wires through the mounting plate side hole.
- Make sure that the crossbar is grounded in accordance with local electrical codes.
- Connect the fixture white wire to the neutral power line wire with a wire nut.
- Connect the fixture black wire to the hot power line wire with a wire nut.

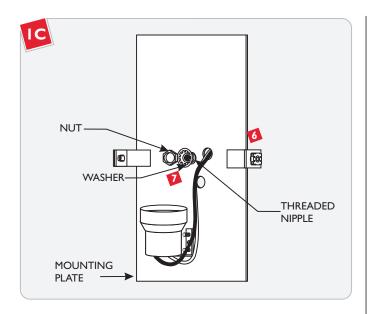

- Place all wires and wire nut connections properly inside the electrical box.
- Slide the mounting plate center hole onto the exposed threaded nipple. Secure the mounting plate in place by tighten the provided nut and washer to threaded nipple.


Install the Lamp & Shade



Use **MAX** 120 Volt, **100** Watt Type A19 Medium Base Lamp.



Screw the lamp into the socket.

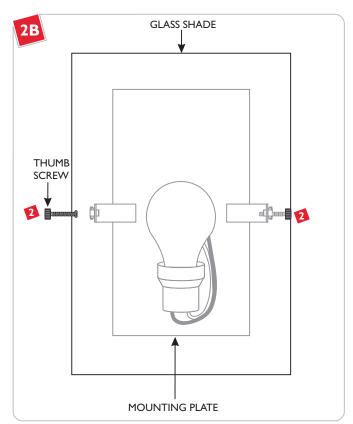

2 Place the glass shade onto the mounting plate. Align the glass shade holes with the mounting plate holes. Tighten the thumb screws to secure the glass shade in place.

NOTE: Do not over tighten the thumb screws which may cause the glass shade to break.

SAVETHESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 800.323.3226 - 847.626.6300

www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company