Juniper 2x18W Compact Fluorescent Wall

PW230OP218_   **1.5**

LBL Lighting

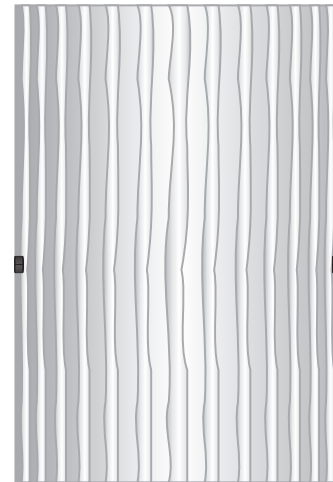**Wall Sconces**

GENERAL PRODUCT INFORMATION:

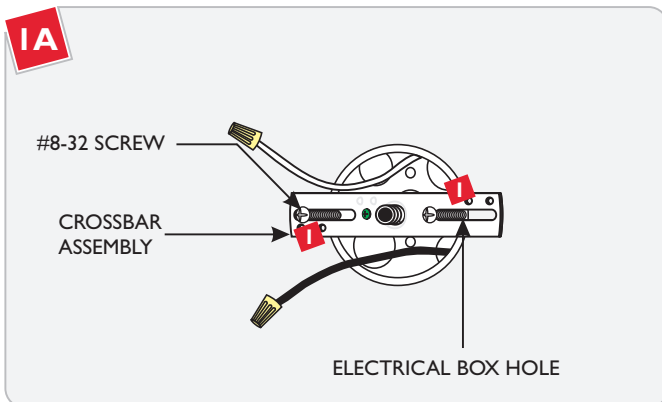This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for indoor dry locations only.
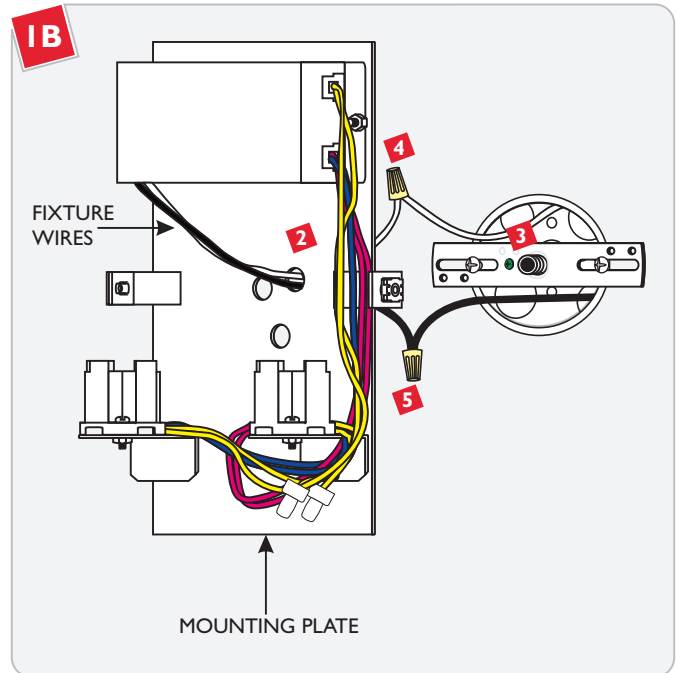
> **CAUTION - RISK OF FIRE**
> **This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN THE POWER TO THE ELECTRICAL BOX OFF.**

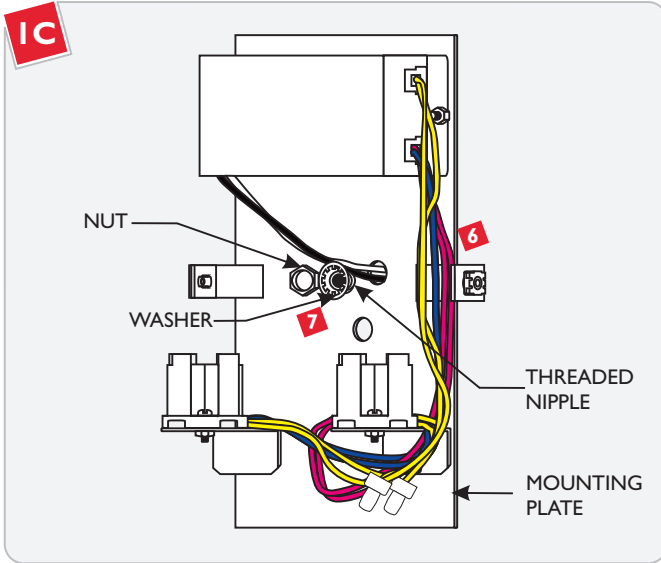## Install the Fixture

1A

#8-32 SCREW

CROSSBAR ASSEMBLY

ELECTRICAL BOX HOLE

1 Mount the crossbar assembly to the electrical box holes with the two #8-32 screws provided.
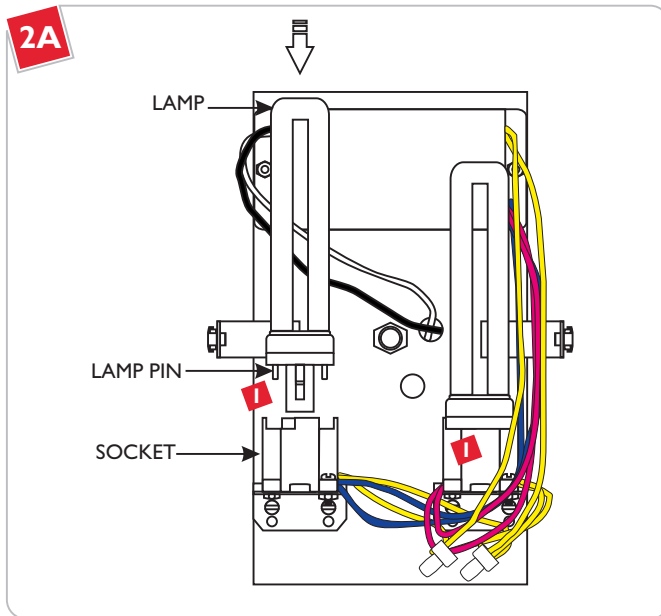
1B

FIXTURE WIRES

MOUNTING PLATE

2 Feed the fixture wires through the mounting plate side hole.

3 Make sure that the crossbar is grounded in accordance with local electrical codes.

4 Connect the fixture white wire to the neutral power line wire with a wire nut.

5 Connect the fixture black wire to the hot power line wire with a wire nut.

IC

NUT

WASHER **7**

6

THREADED NIPPLE

MOUNTING PLATE

6 Place all wires and wire nut connections properly inside the electrical box.

7 Slide the mounting plate center hole onto the exposed threaded nipple. Secure the mounting plate in place by tighten the provided nut and washer to threaded nipple.
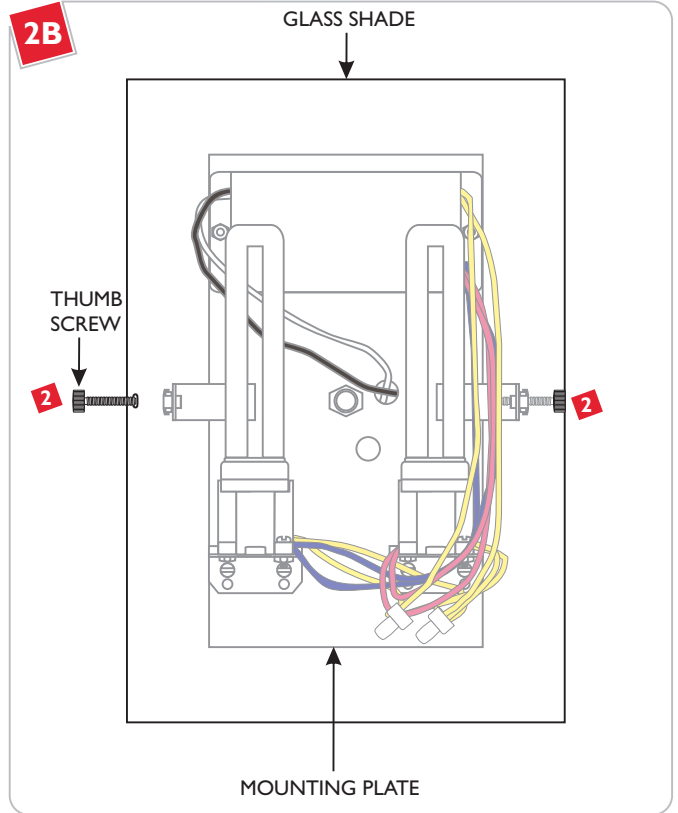
Install the Lamp & Shade

2A

LAMP

LAMP PIN **1**

SOCKET **1**

Use **MAX 18** Watt Type Quad Tube G24q-2 Base Compact Fluorescent Lamp With Each Socket.

1 Install each lamp by pushing the lamp pins completely into the socket holes.

2B

GLASS SHADE

THUMB SCREW

2

2

MOUNTING PLATE

2 Place the glass shade onto the mounting plate. Align the glass shade holes with the mounting plate holes. Tighten the thumb screws to secure the glass shade in place.

NOTE: Do not over tighten the thumb screws which may cause the glass shade to break.

SAVE THESE INSTRUCTIONS!

LBL Lighting

7400 Linder Ave, Skokie, IL 60077
800.323.3226 - 847.626.6300
www.lbllighting.com

A Generation Brands Company