


omni medium outdoor

DESCRIPTION

Minimal outdoor luminaire with extruded aluminum housing, die-cast end caps and opal glass cover. IP67 rated. May be mounted vertically or horizontally. Incandescent includes (2) E26 medium base 60 watt or equivalent BT15 halogen lamps; fluorescent includes (1) 2G11 base 24 watt twin tube compact fluorescent lamps and electronic ballast. Fluorescent version may also be lamped with (1) 2G11 base 27 watt twin tube compact fluorescent lamp (not included). ADA compliant 120 or 277v.



opal glass

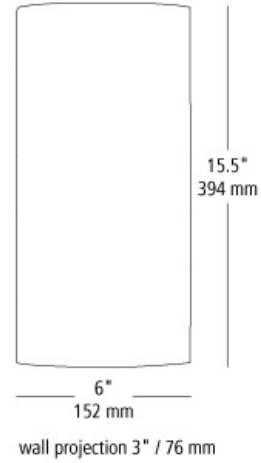

ORDERING INFORMATION

type	model	color	finish	lamp	wet location
JW Incandescent	564	OP opal glass	BZ bronze	2D E26 BT15 2x60w 120v (JW only)	W wet location
PW Compact Fluorescent			SI silver	CF1HE 2G11 24w twin tube 120v (PW only) CF2HE 2G11 24w twin tube 277v (PW only)	

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



7400 Linder Avenue
Skokie, Illinois 60077

T 847.626.6300
F 847.626.6350

www.lblighting.com



©2013 LBL Lighting. All Rights Reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.