Tear Drop Compact Fluorescent Wall

1.5



GENERAL PRODUCT INFORMATION:




This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is suitable for damp locations.

CAUTION - RISK OF FIRE This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN THE POWER TO THE ELECTRICAL BOX OFF.


Install the Fixture

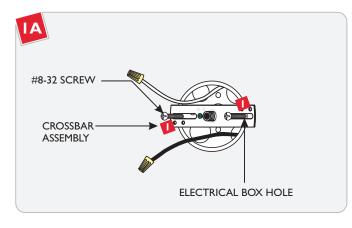

Mount the crossbar assembly to the electrical box holes with the two #8-32 screws provided.




PW4601_SC13Q

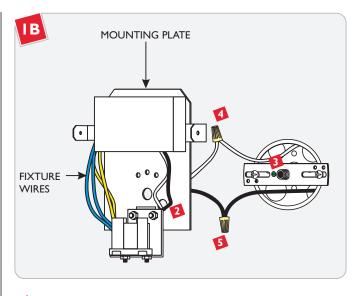


Feed the fixture wires through the mounting plate side hole.

- Make sure that the crossbar is grounded in accordance with local electrical codes.
- Connect the fixture white wire to the neutral power line wire with a wire nut.
- Connect the fixture black wire to the hot power line wire with a wire nut.

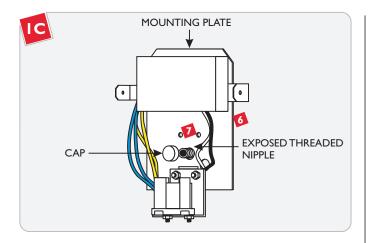


- Place all wires and wire nut connections properly inside the electrical box.
- Slide the mounting plate center hole onto the exposed threaded nipple. Secure the mounting plate in place by tightening the cap to threaded nipple.

Install the Lamps & Shade



Base Compact Fluorescent Lamp.

Push the lamp pins completely into the socket holes.



2 Place the glass shade onto the mounting plate. Align the glass shade holes with the mounting plate holes. Tighten the thumb screws to secure the glass shade in place.

NOTE: Do not over tighten the thumb screws which may cause the glass shade to break.

SAVETHESE INSTRUCTIONS!



www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company