




MODEL NUMBER:

- ☐ **7038.801 Tropic Widespread**
 Metal Speed Connect® pop-up drain.
 Metal Lever handles.

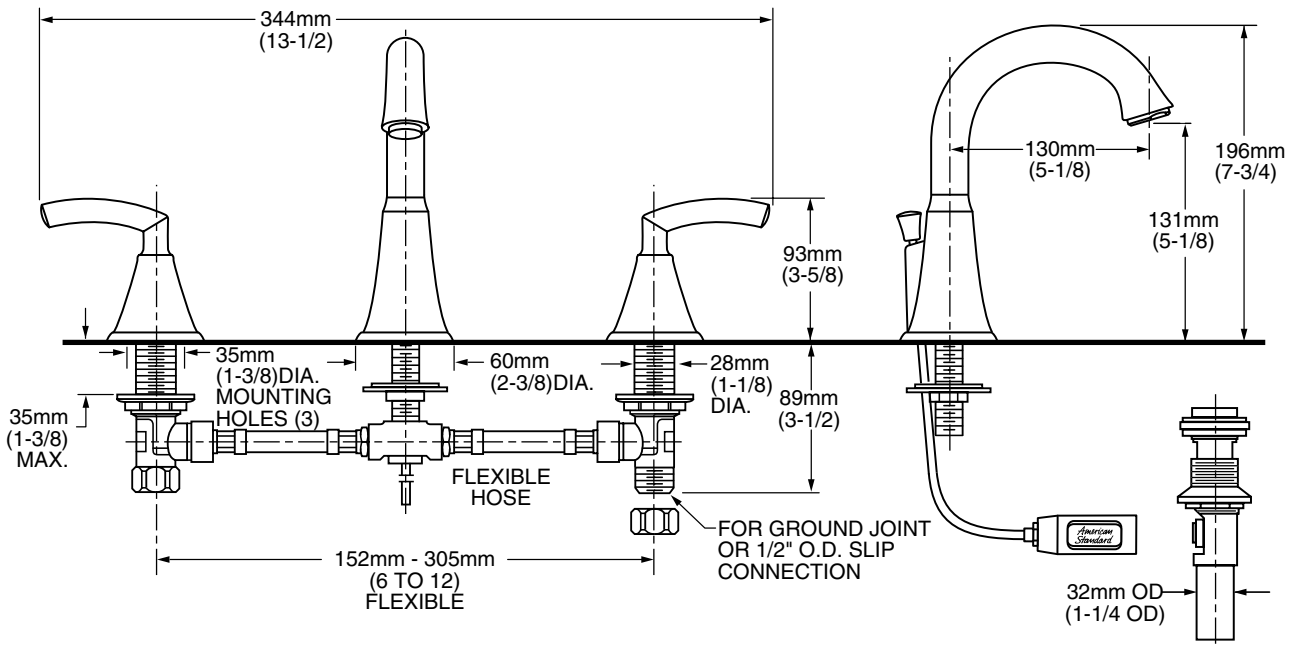

GENERAL DESCRIPTION:

Durable cast brass spout and metal lever handles. Cast brass valve bodies with flexible hose connections for 6" to 12" (152mm to 305mm) installations. One-half inch male inlet shanks with brass coupling nuts. 1/4 turn washerless ceramic disc valve cartridges. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect® drain body with 1-1/4" (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

- Brass Construction:** Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridges:** Assure a lifetime of smooth handle operation and drip-free performance.
- Low Lead:** Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.
- Exclusive Speed Connect Metal Drain:**
 - Fewer Parts - installs in less time.
 - No adjustments required - seals the first time, every time.
 - Flexible stainless steel cable - installs effortlessly in tight spaces.
- Choice of Finishes:** Available in Polished Chrome or Satin Nickel (PVD).


SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature a cast brass spout and valve bodies with flexible hose connections for 6" to 12" installations. Shall feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7038.801._____.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9**

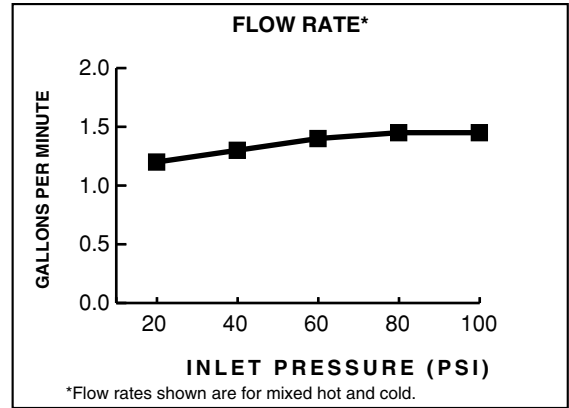

Product Number	Description	Finish Options	
		Polished Chrome	Satin Nickel (PVD)
		002	295
7038.801	Tropic Widespread with Metal Speed Connect® Pop-up drain. Metal Lever handles.		



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.