

**Delta Series
DEV418 & DEV518**

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

Features

This simple style with elegant geometry features white case glass and a cast metal glass support with a floating square junction box cover plate. The glass diffuser has an enclosed (closed top) glass diffuser. This enables the fixture to be mounted upside down if necessary. Glass is retained with 2 indistinguishable set screws. This product is ideal for over mirror vanity applications. Fixture can be mounted with glass diffusers facing up or for close to ceiling applications facing down. ADA compliant.



Construction

Glass is mounted into a 1/8" thick die cast fitter. Wall plate is stamped steel and held in place with 6 screws located within the floating recess. Fixture mounts to standard junction box (not included). Power supply connections must be made inside a junction box (not included).

Finish

All exposed metal parts are plated satin nickel with a clear lacquer topcoat.

Diffuser

Diffuser is .090" thick frosted hand blown case glass.

Electrical

This unit is wired with UL listed electronic normal power factor socket ballast for 120V/60 Hz AC operation.

Lamping

Requires 4-18 watt or 5-18 watt compact fluorescent 4 pin quad lamp, not included.

Certification



All fixtures are cULus listed for damp locations.

Options

13 watt compact fluorescent 4 pin quad lamp
ENERGY STAR® qualified when ordered with 120V ballast and lamp

For photometric information, consult factory.

Specifications and dimensions
subject to change without notice.

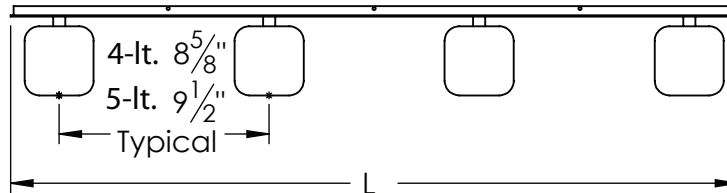

Ordering Information:

Model No.	Finish	Lamps		Dimensions		
		Qty	Type	H	L	D
120V						
DEV418SNEC	Satin Nickel	4	18W CFQ 4 Pin	9-3/8"	30"	3-5/8"
DEV518SNEC	Satin Nickel	5	18W CFQ 4 Pin	9-3/8"	43"	3-5/8"