

**Rio Series
RIS224**

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

Features

This simple style with elegant geometry features 2 pieces of white case glass and a cast metal glass support with a floating square junction box cover plate. The sconce is 32-1/2" tall and ADA compliant. The glass diffuser has an open top and screws in place for easy relamping. Glass is retained with spun metal fitter for a clean appearance. This product is ideal for corridor, over mirror and accent applications.

Construction

Glass is mounted into a 1/8" thick die cast fitter. Wall plate is stamped steel and held in place with 2 screws located within the floating recess. Power supply connections must be made inside a junction box (not included). Fixture mounts to standard junction box with plaster ring (not included).

Finish

All exposed metal parts are plated satin nickel with a clear lacquer topcoat.

Diffuser

Diffuser is .090" thick frosted hand blown case glass.

Electrical

This unit is wired with a UL listed program-start, electronic high power factor ballast 120-277 Universal voltage 50/60Hz AC operation.

Lamping


For use with 2-24 watt compact fluorescent 4 pin long twin tube (2G11 base) lamp; not included.

Certification

All fixtures are cULus listed for damp locations.

For photometric information, consult factory.

Specifications and dimensions
subject to change without notice.

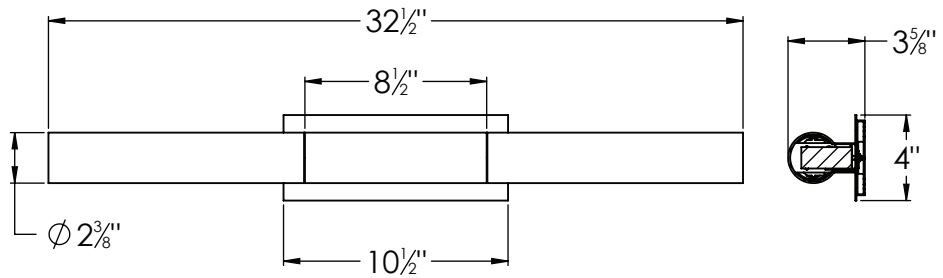

Ordering Information:

Model No.	Finish	Lamps		Dimensions		
		Qty	Type	H	W	L
120V-277V						
RIS224SNMV	Satin Nickel	2	24W 2G11 4 Pin	32-1/2"	4"	3-5/8"