

## Curved Profile Wall Bracket ASP115/117/125/132

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

### Features

Economy 1 light T8 wall bracket has a curved front and can be mounted vertically or horizontally. Product includes chrome end caps, bright aluminum body, grounded convenience outlet and rotary turn switch located in the right end cap. Diffuser is extruded white acrylic with ribbed linear prisms. Tools are not required for lamp replacement. Power supply connections can be made in a 2" x 4" handy-box (not included) or made inside the housing.



### Construction

The housing is die formed from 22-gauge aluminum and is provided with standard mounting holes and wiring access. Ends are die-formed 20-gauge steel.

### Finish

Housing is finished in bright anodized aluminum. Ends are anodized aluminum finish.

### Diffuser

Diffuser is .100" extruded white acrylic with ribbed linear prisms located on the outside. Diffuser is retained by the end caps and secured by two acorn nuts.

### Electrical

This unit is wired with UL listed electronic normal power factor 120V 60Hz AC (R8) or 120-277 Universal 50/60Hz AC high power factor. Instant start ballast for one T8 lamp.

### Lamping

For use with 1 T8 linear fluorescent lamps; supplied by others.


### Certification

All fixtures are cULus listed for damp locations.

### Options (consult factory)

Less convenience outlet  
Less rotary switch

For photometric information, consult factory.

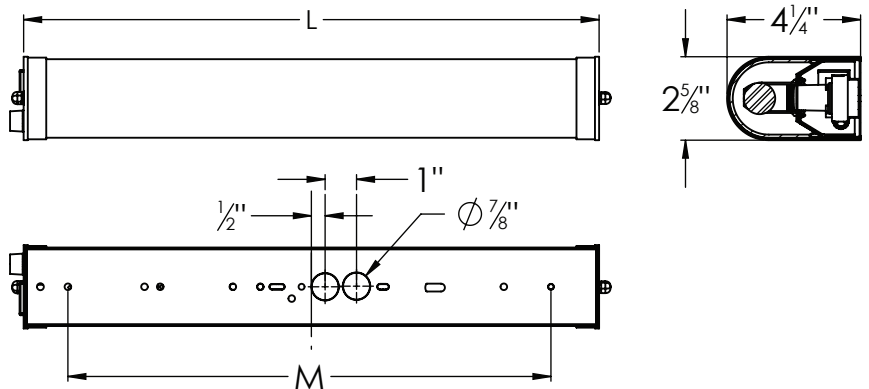

Specifications and dimensions  
subject to change without notice.

## Ordering Information:

Model No.		Finish	Lamps		Dimensions			Mounting
120V	120V-277V		Qty	Type	H	L	D	M
ASP115R8		Bright Aluminum	1	F15T8	2-5/8"	18-3/8"	4-1/4"	15-1/2"
ASP117R8	ASP117MV	Bright Aluminum	1	F17T8	2-5/8"	24-3/8"	4-1/4"	21-1/2"
ASP125R8	ASP125MV	Bright Aluminum	1	F25T8	2-5/8"	36-3/8"	4-1/4"	30-3/4"
ASP132R8	ASP132MV	Bright Aluminum	1	F32T8	2-5/8"	48-3/8"	4-1/4"	42-3/4"