

LED Undercabinet ACU12/16/22

Features

All purpose LED undercabinet light is shallow profile. This series features a High/Low/Off switch used to light the full LED array or only half. This product is fully dimmable when used with an electric low voltage dimmer. Accessories include 5 ft. cord and plug and 12" connecting cable for linking of units in continuous runs. Easy installation with mounting from top or side access holes. Hardwire Box compatible.
 ACU12LWH - Link up to 80 units max.
 ACU16LWH - Link up to 64 units max.
 ACU22LWH - Link up to 40 units max.

Construction

Housing is made from extruded aluminum. End caps are molded from high impact ABS plastic.

Finish

All exposed metal is painted lighting grade white gloss enamel.

Diffuser

Diffuser is clear acrylic with linear prisms.

Electrical

This unit is wired for 120V operation. LED driver has a 12VAC output to the LED light engine. High/low switch included. Electronic low voltage dimmers sold separately.

Lamping

LED's are 3000K non-replaceable. Rated for 25,000 hrs. 75 CRI. 0.06W per LED.

Certification




Fixtures are cETLus listed for dry locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 3 years from date of purchase.

**Specifications and dimensions
subject to change without notice.**

Project		Fixture Type	
Location		Quantity	
Approved By	Date	Catalog Number	

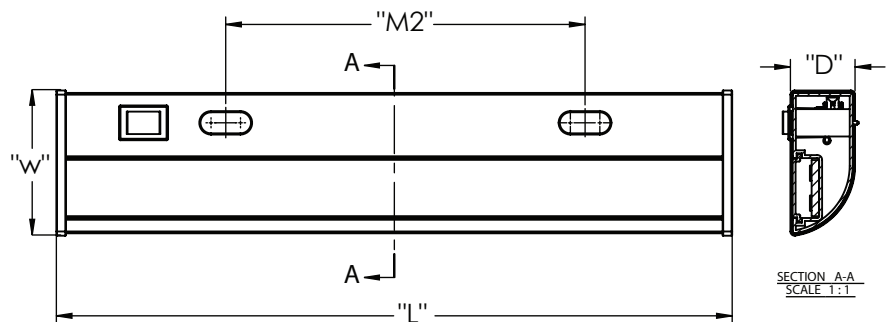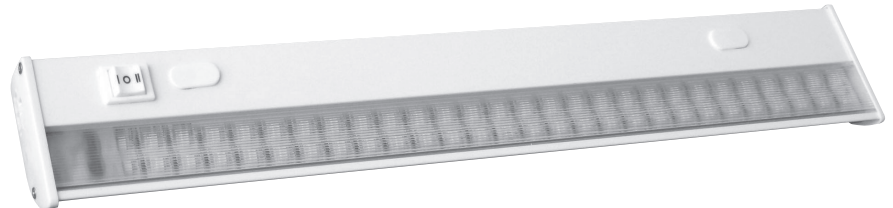

SECTION A-A
SCALE 1:1

Ordering Information:

Model No.	Finish	Lamps		Total Watt	Lumens	Dimensions				
		Qty	Type			L	W	D	M ₁	M ₂
ACU12LWH	White	36	0.06W LED	2.5W	140	11-1/2"	2-1/4"	1"	6"	6"
ACU16LWH	White	56	0.06W LED	3.5W	210	16-7/8"	2-1/4"	1"	11-3/8"	11-1/4"
ACU22LWH	White	78	0.06W LED	4.7W	295	22-1/8"	2-1/4"	1"	16-3/4"	16-5/8"