Assembly Instructions



CALL US FIRST 1-877-PREPAC1 1-877-773-7221



Mon - Fri 7am - 4pm PST 10am - 7pm EST

- For help with assembly
- If you have received a damaged or defective part or are missing hardware.

We will process replacement parts in 2 business days or less. Parts are shipped via UPS Ground or mail.

Before you call please:

- Record the following information from the shipping label on the outside of the box. You will need it for warranty purposes:
 - Ship To Name
 - Sales Order Number
- 2) Note the product model number.
- Review the contents of your shipment to determine what you are missing. This unit is shipped in 3 cartons. Make sure you have received all cartons.


Online Option:

Fill out the Replacement Parts Order form in the Product Support section of our website: **www.prepacmfg.com**

Required Tools		Optional Tools
Screwdrivers	Phillips Head	Using a power screwdriver will speed up assembly.
1	Flat Head	Caution Do not over tighten any screw.
	Hammer	The last few turns of each screw should be done very slowly or by hand.

Queen Platform Storage Bed Model # BQ-6200-3K

This product is shipped in **3 cartons**




Make sure you have all cartons. Sometimes cartons shipped on the same day get separated and are delivered on different days.




Prepac Manufacturing Ltd. 6705 Dennett Place Delta, BC V4G 1N4


LB-0625-R 2012-06-20

Hardware Identification

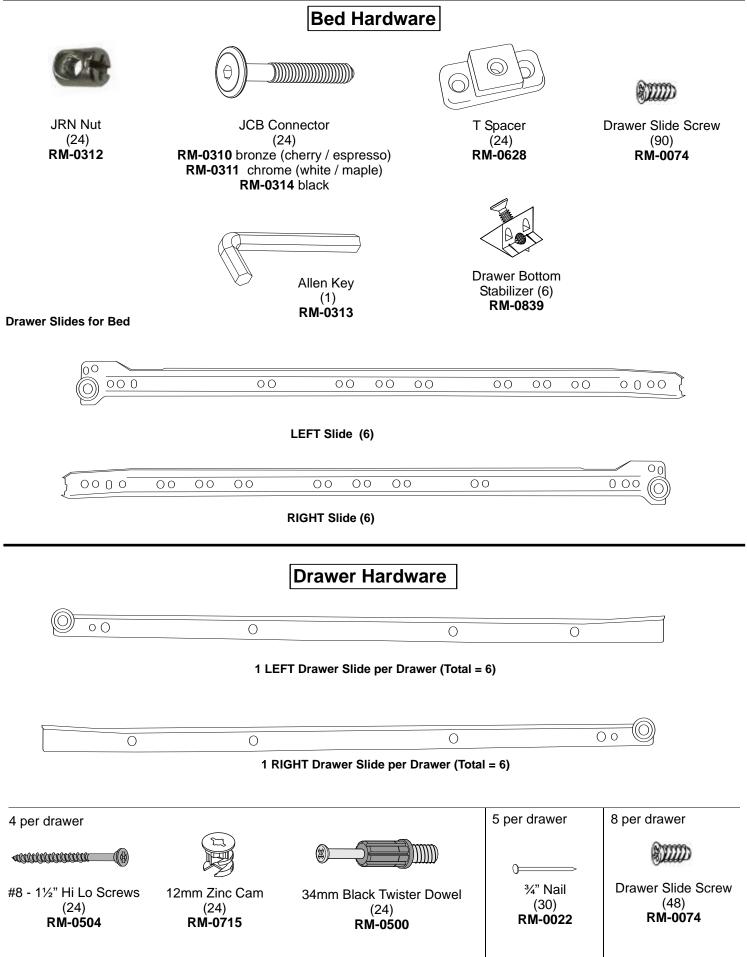


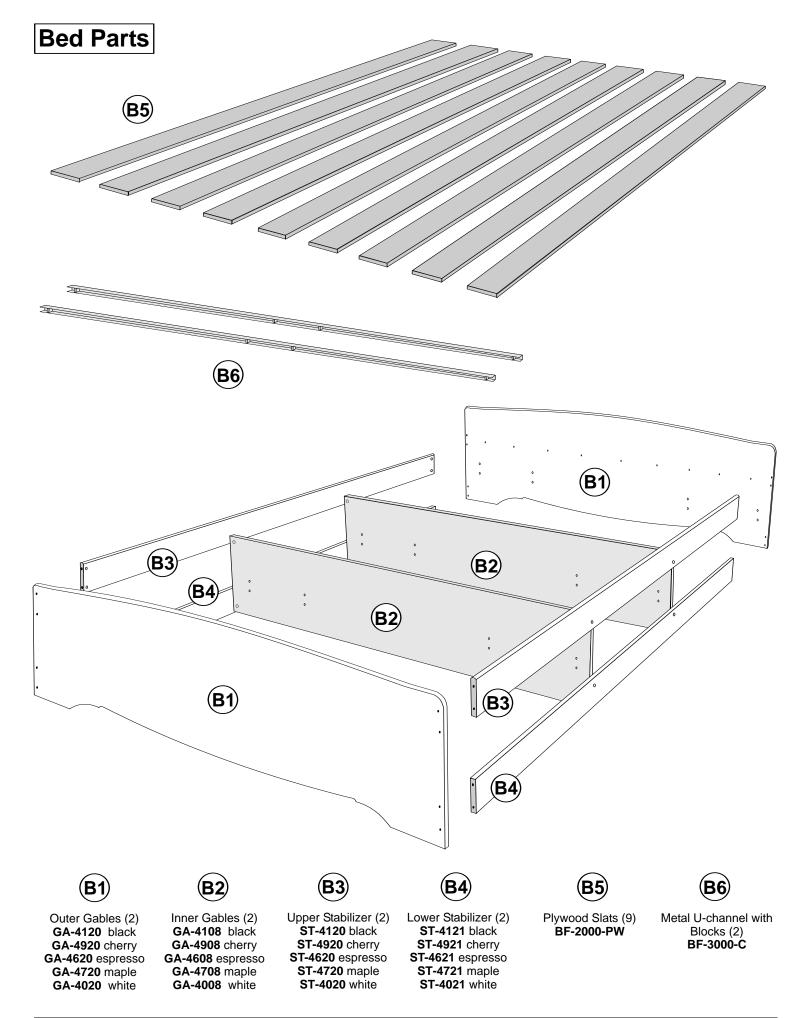

STEP 1 Estimated Time: 10 minutes

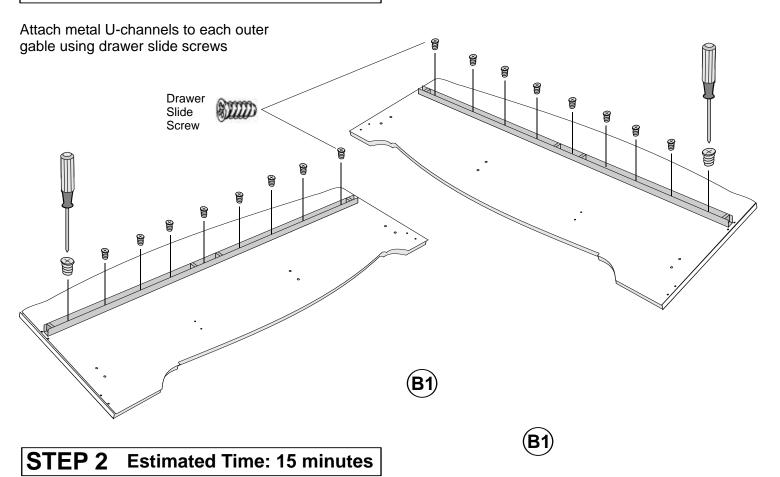

Attach T spacers to outer gables with drawer slide screws.

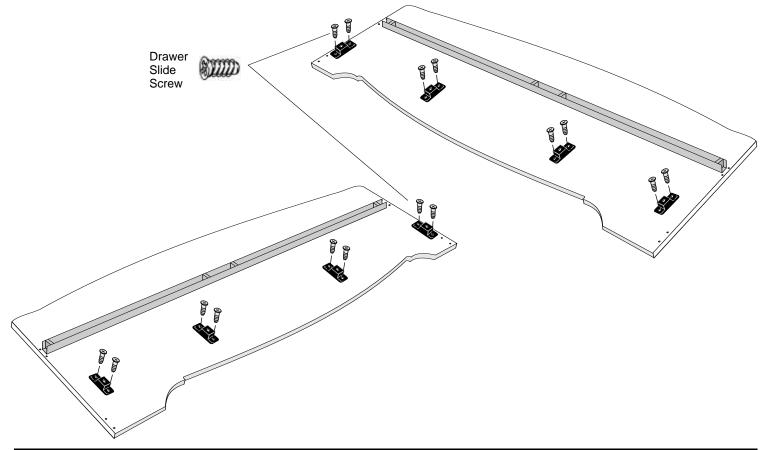


STEP 3 Estimated Time: 10 minutes


Attach drawer glides to T-spacers on outer gables as shown in the photo

Position the Drawer Glides with:

- A) The wheel at the finished side
- B) The wheel on the unfinished bottom

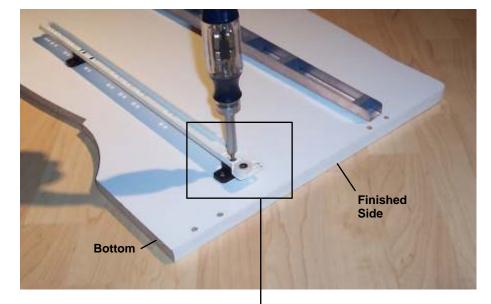




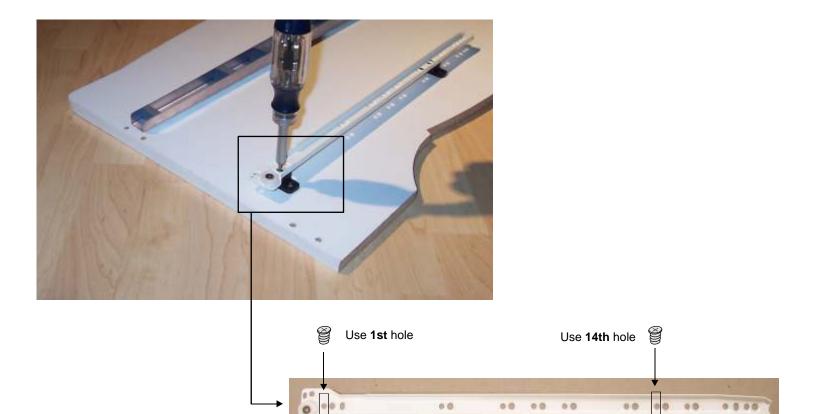


STEP 4 Estimated Time: 5 minutes

Insert JRN nuts into the holes on each end of the inner gables.

The holes are drilled through. You can insert them from either side.

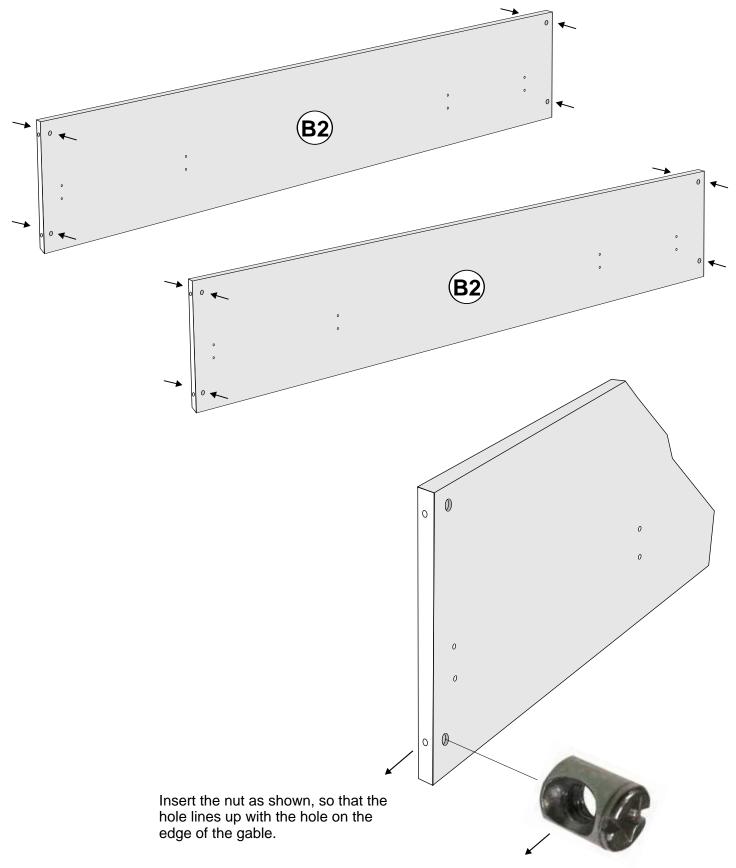

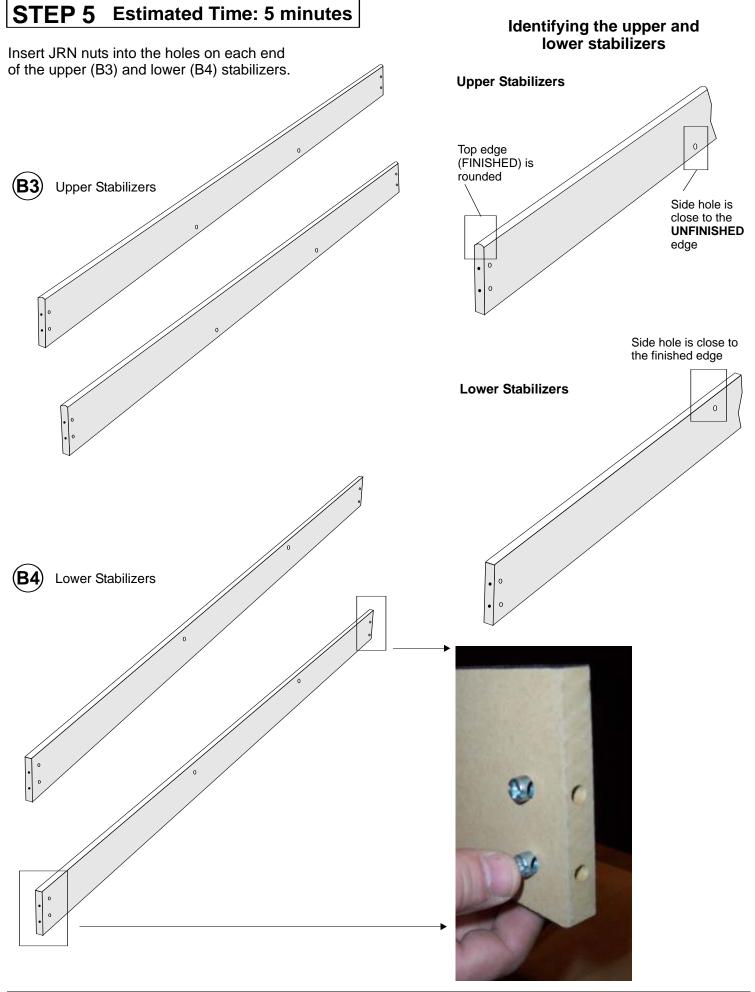

STEP 6 Estimated Time: 10 minutes


Attach "T" spacers and drawer glides to Inner Gables

6a Attach "T" spacers to ONE side of each inner gable with drawer slide screws

6b Attach drawer glides to "T" spacers on inner gables.

Position the drawer glides with:

- A) The wheel at the finished edge
- B) The wheel on the bottom




IMPORTANT:


Before attaching the drawer glides, determine the TOP and BOTTOM of each inner gable.

A. Measure from each edge of the "T" Spacer to each unfinished edge.

B. The measurement that is approximately 4" will be the **BOTTOM**.

Check the position of the drawer glides carefully before you attach them to the inner gables.

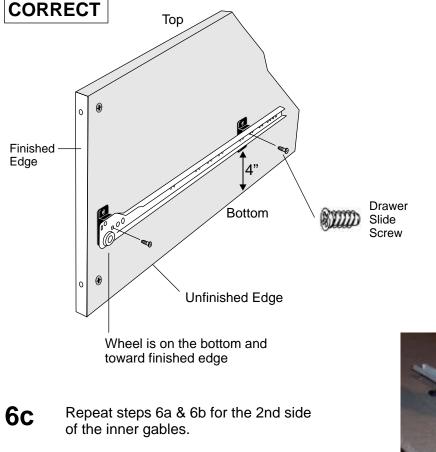







STEP 7 Estimated Time: 5 minutes

Using JCB connectors, and the Allen Key provided, attach each lower stabilizer (B4), one at a time, to both inner gables

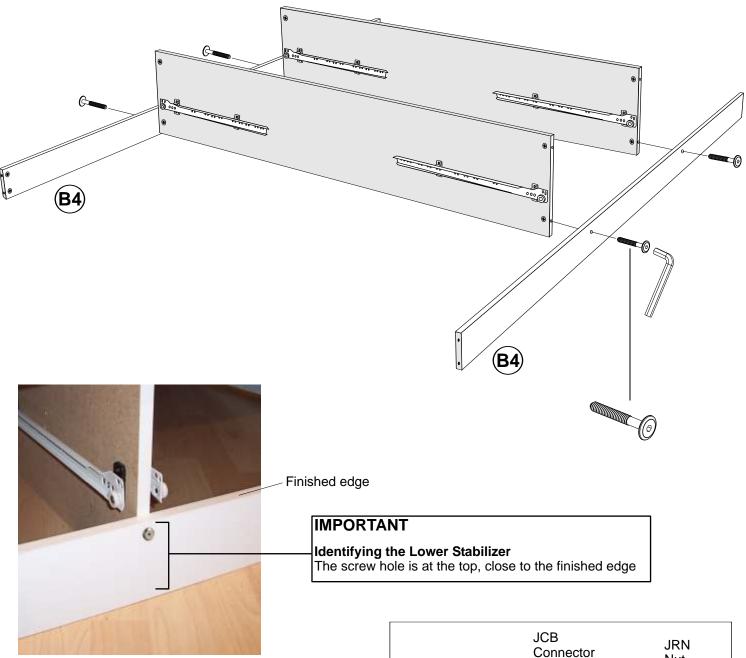


If you have any difficulty tightening the JCB connector, use a screwdriver to adjust the JRN nut to make sure the hole is facing the opening for the connector






STEP 8 Estimated Time: 5 minutes

Using JCB connectors, attach each upper stabilizer (B3), one at a time, to both inner gables.

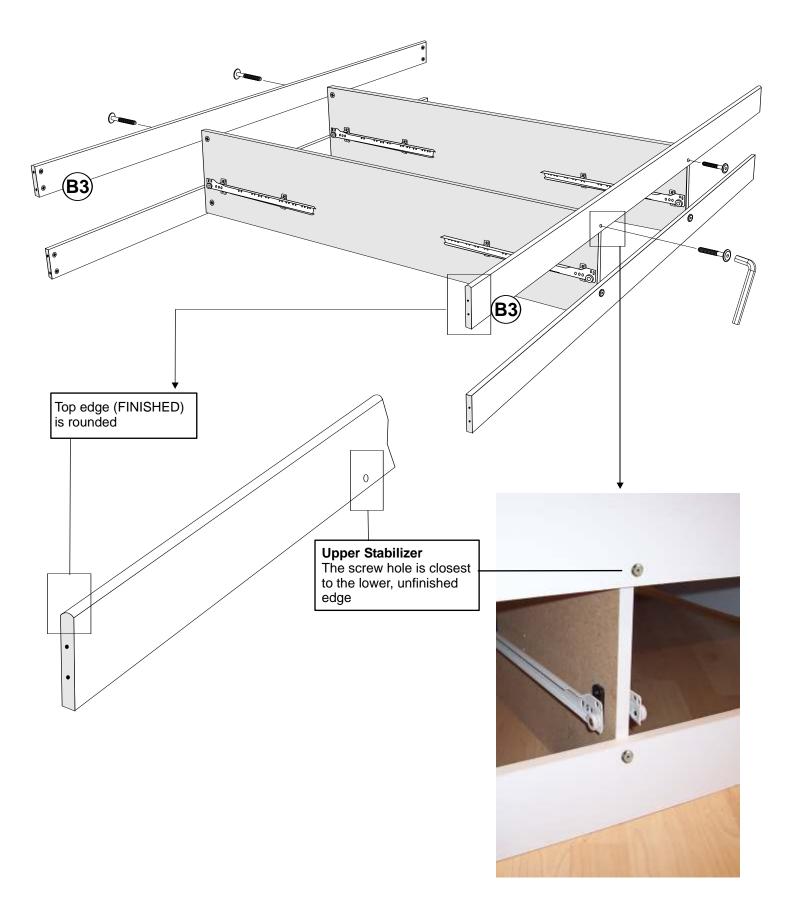


STEP 8 Estimated Time: 10 minutes

Attach one outer gable (B1) to stabilizers with JCB connectors

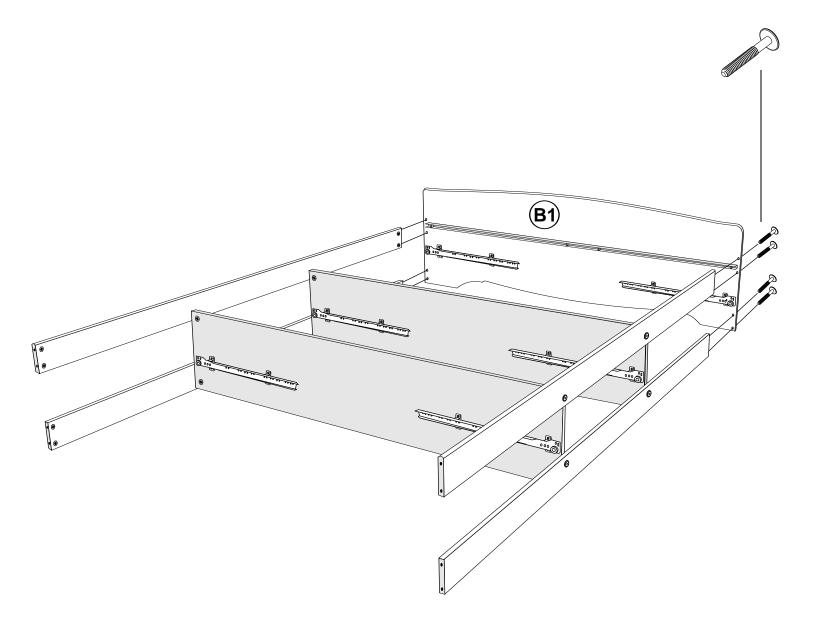

STEP 9 Estimated Time: 5 minutes


- **9a** Spread the wooden slats out across the inner stabilizers
- **9b** Slide the slats into the wide spaces of the metal U-channel (B6) on one outer gable.

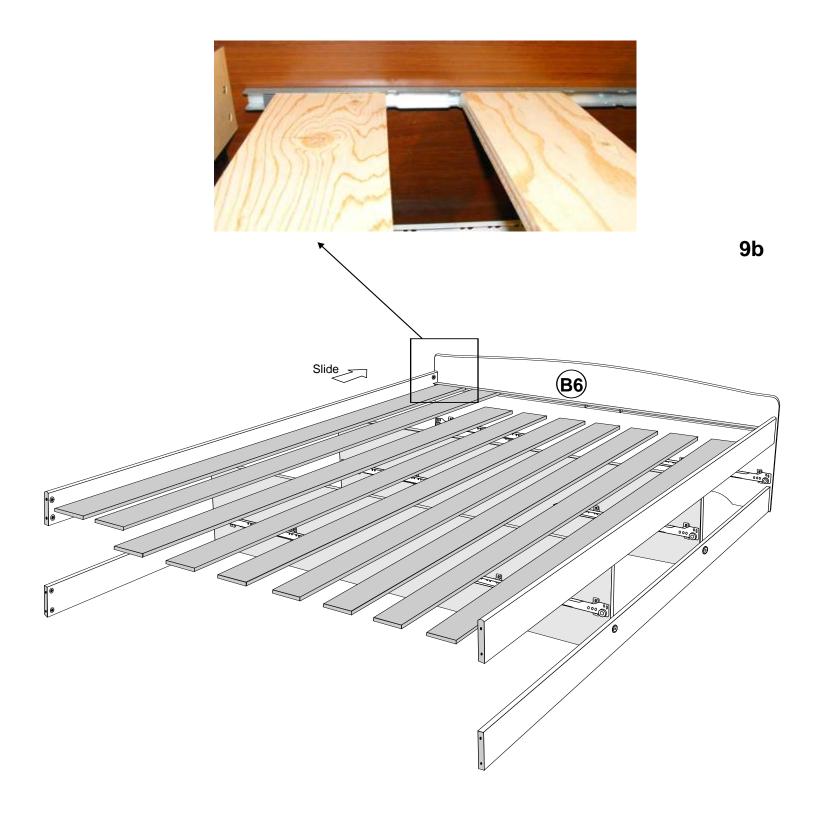


STEP 10 Estimated Time: 10 minutes


Attach second outer gable to stabilizers with JCB connectors


- **10a** Secure the gable in place with connectors, but don't fully tighten
- **10b** Ensure the slats are set inside the u-channel and that they haven't pulled out of the first outer gable.
- **10c** Firmly tighten the connectors

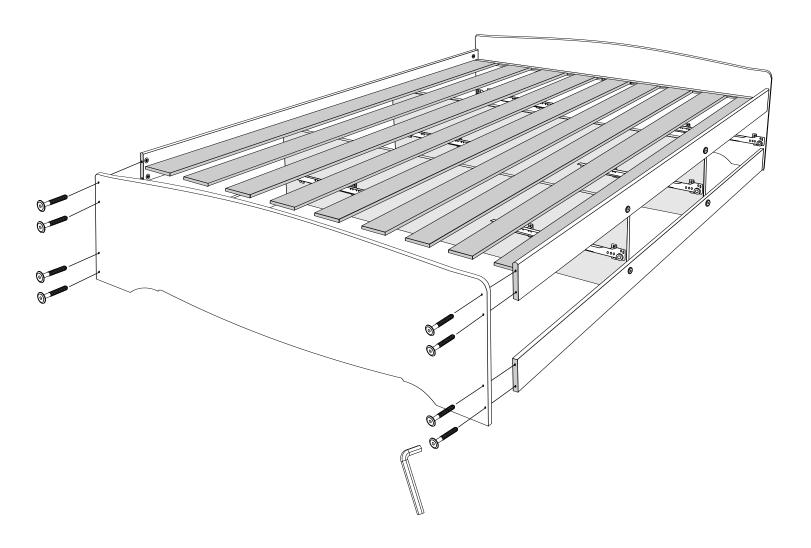

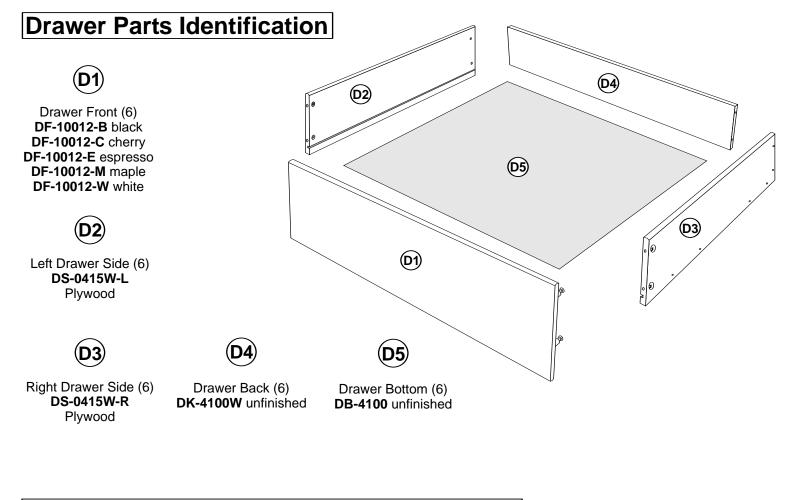





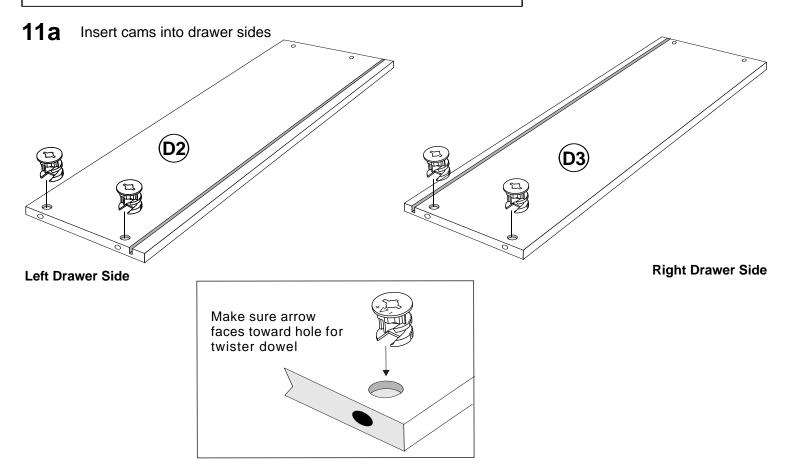

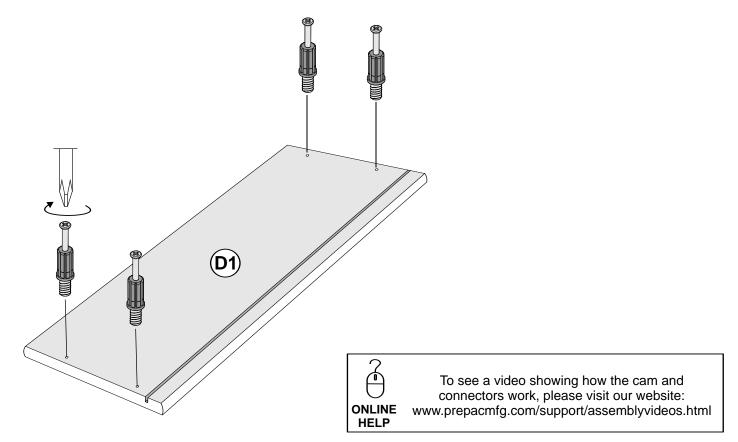



11C Attach drawer sides to drawer back with 1½" Hi Lo screws

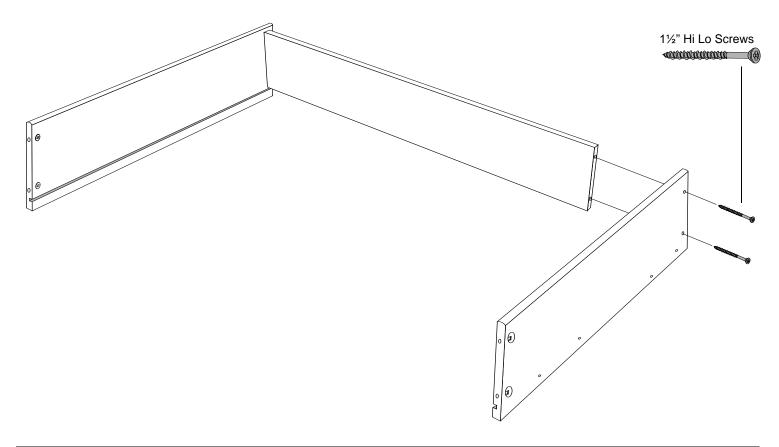

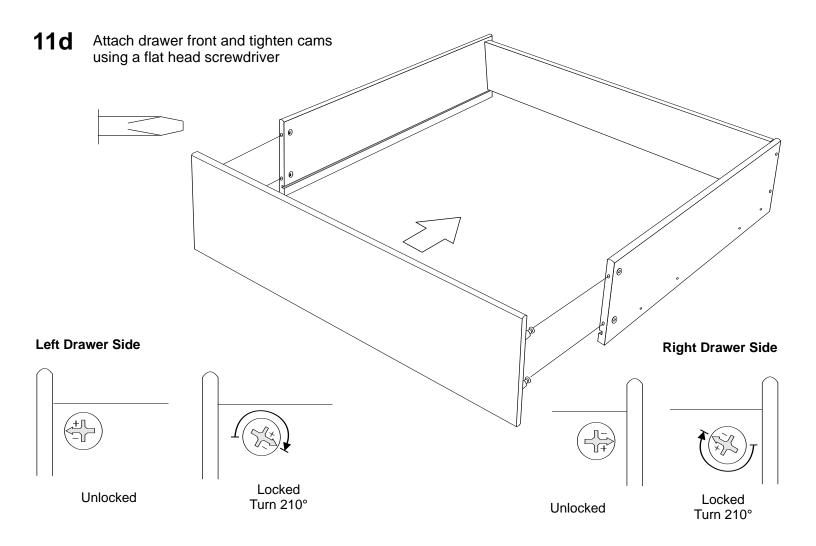


11e Turn drawer upside down and slide drawer bottom into grooves

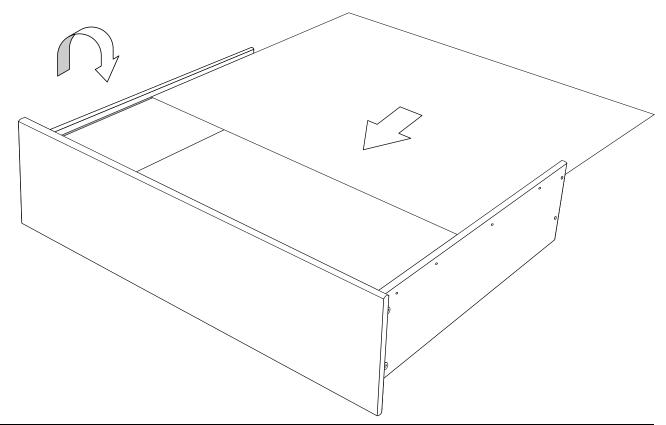


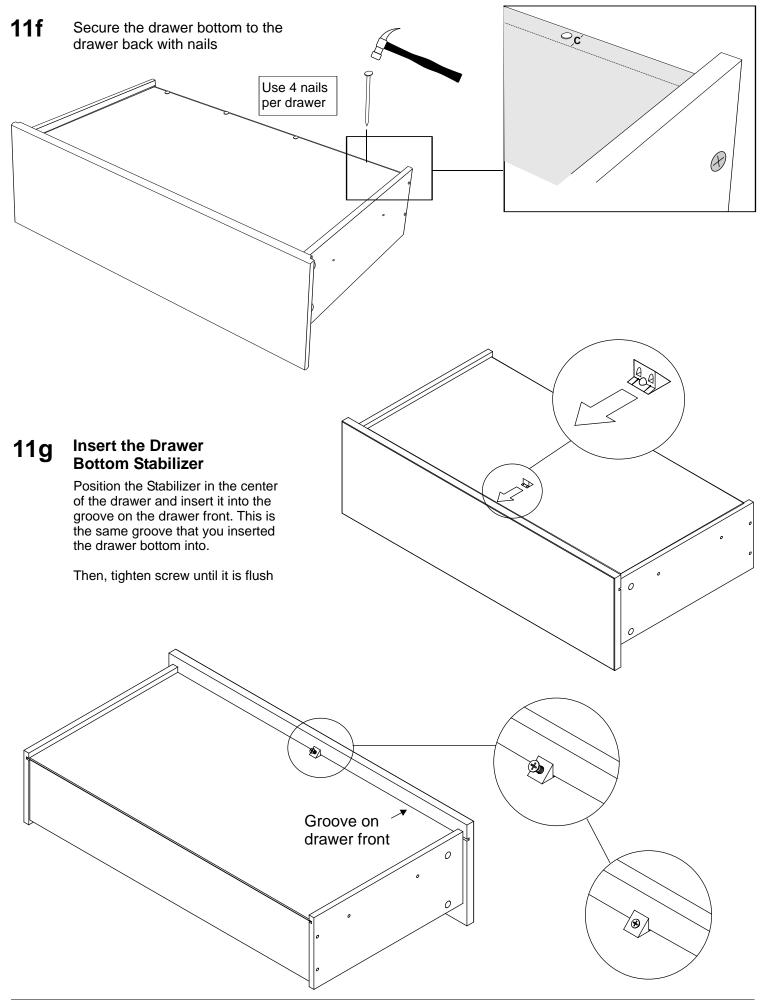

11h Attach drawer slides to left and right drawer sides using drawer slide screws

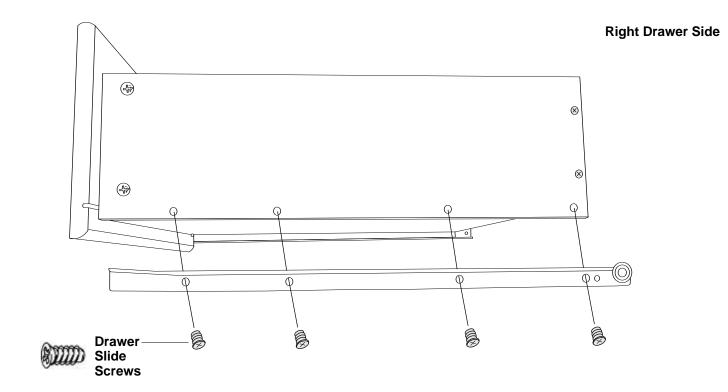


Left Drawer Side

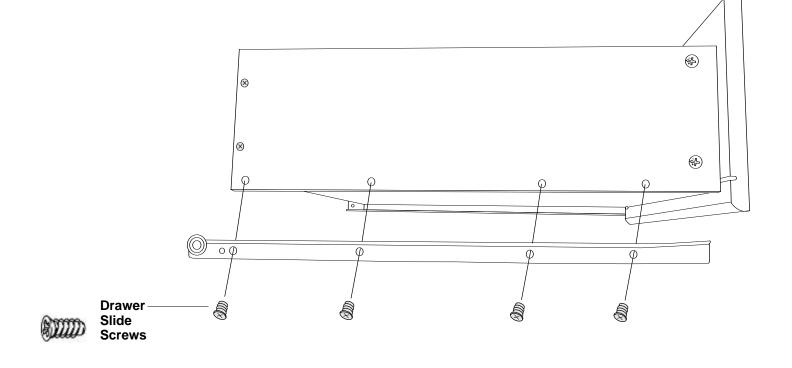

STEP 12 Estimated Time: 2 minutes

Insert drawers

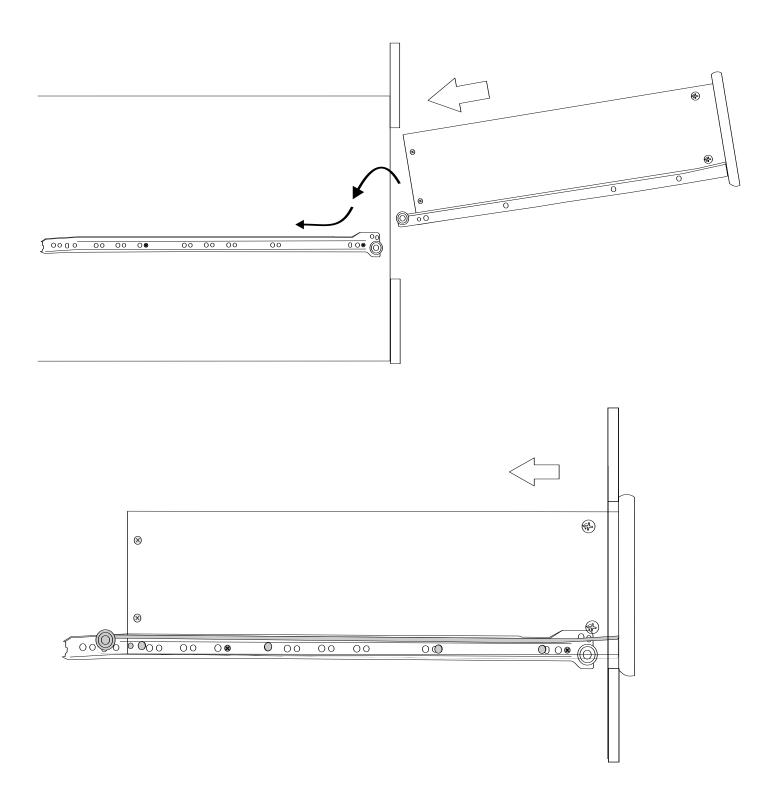

Note: When drawers are installed correctly, you will not be able to remove them without first lifting up the drawer front.

A PREPAC[™]

Furniture Care Q&A

Q. How do I clean your products?

A. We recommend that you simply wipe your products with a clean, damp cloth and then dry immediately with another clean cloth to maximize the life span and look of your unit

Q. Can I paint or varnish your products?

A. Our products are made from durable composite woods with a laminate finish and therefore should not be painted or varnished.

Q. Are they waterproof?

A. NO. If liquid is spilled and quickly wiped up, no damage will be done to your product. However, continuous exposure to liquids or high humidity may cause damage to the board.

