

SPECIFICATIONS

Model LKD2443C

FEATURES

- Model LKD2443C
- Four hole, deck mounted escutcheon, dual handle mixing faucet
 - Four 1-1/4" (32mm) diameter faucet holes required
 - Maximum countertop thickness is 1-1/8" (28mm)
- Full swing spout with restricted flow aerator
- Highly polished, chrome plated finish
- Removeable cartridge
- 1/2" (13mm) I.P. connections on 8" (203mm) centers.
- All operating parts are replaceable from above deck.
- Retractable spray and hose.
- Ship Wt. 4 lbs. (1.8Kg)
- Maximum flow rate

 2.5 GPM/9.5 L/min at 80 P.S.I.G.
 2.2 GPM/8.3 L/min at 60 P.S.I.G.

Model LKD2442C

- Same as LKD2443C except less retractable spray and hose.
- Requires 3 faucet holes.
- Ship Wt. 3-1/4 lbs. (1.4Kg)

Model LKD2442BHC


- Same as LKD2442C except with 4" (102mm) handles.
- Ship Wt. 3-3/4 lbs. (1.6Kg)

WARRANTY

- Limited Lifetime
- COMPLIES WITH:
- ADA

Ż

- ANSI/NSF61 Certified
- ASME 112.18.1/CSA B125-01
- CA AB1953/VT S152

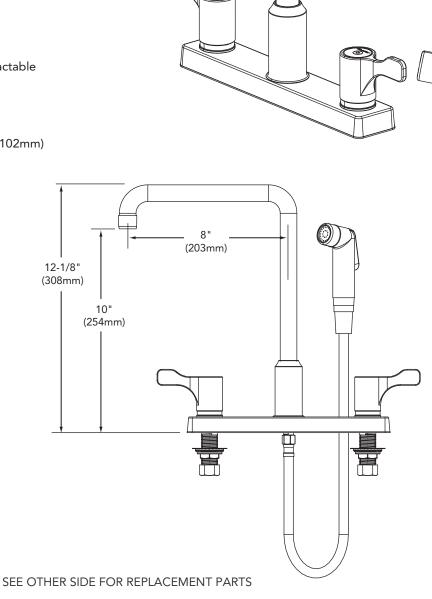



REPLACEMENT PARTS

Hi-Arc[®] Dual Handle Kitchen Faucet Models LKD2442C, LKD2442BHC and LKD2443C

