

FEATURES Model LK7921SSS

- · Single hole top mount installation
 - 1-1/2" (38mm) faucet hole required
 - Maximum countertop thickness 2-1/2" (64mm)
- Stain stainless steel finish, single-lever faucet
- · 360° swing spout
- · Ceramic disc cartridge
- · Stainless steel construction
- Flexible braided stainless steel supply hoses with 1/2"-14 NPT female fittings
- Ship Wt. 6.6 lbs. (3Kg)
- Due to the weight of this faucet, Elkay recommends that it be installed to an 18" (457mm) gauge stainless steel sink (or heavier) or to a solid surface countertop
- · Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G.
 - 2.2 GPM/8.3 L/min at 60 P.S.I.G.

Model LK7922SSS

- Same as LK7921SSS except with a retractable side spray
- Two hole top mount installation
 - One 1-1/2" (38mm) diameter faucet holes required for faucet and one 1-1/4" (32mm) diameter faucet holes required for side spray
 - Maximum countertop thickness 2-1/2" (64mm)
- Ship Wt. 7 lbs. (3.2Kg)


WARRANTY

· Limited Lifetime


COMPLIES WITH:

- ADA
- · ANSI/NSF61 Certified
- ASME 112.18.1/CSA B125.1 Certified
- CA AB1953/VT S152
- · cUPC Certified
- · UPC Certified






Allure[®] Single Handle Kitchen Faucet Models LK7921SSS and LK7922SSS



Model LK7922SSS

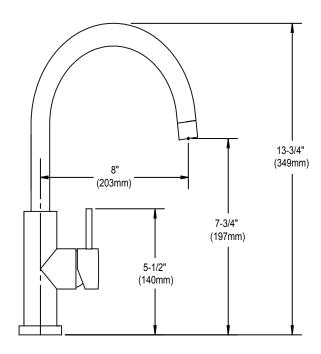

SEE OTHER SIDE FOR REPLACEMENT PARTS



Allure[®] Single Handle Kitchen Faucet Models LK7921SSS and LK7922SSS

