ELKAY®
SPECIFICATIONS

GENERAL
Highest quality sink formed of #16 (1.6mm) gauge, type 316 nickel bearing stainless steel. Undermount.

DESIGN FEATURES
Bowl Depth: 10" (254mm).
Coved Corners: Approximately 5/8" (15mm).
Finish: Exposed surfaces are polished to a bright satin finish.
Underside: Fully protected by heavy duty enhanced Sound Guard® Plus undercoating designed to reduce condensation and dampen sound.

OTHER
Drain Opening: 3-1/2" (89mm).
NOTE: All Elkay undermount sinks are designed to attach to the underside of any solid surface countertop.
This sink complies with ASME A112.19.3-2008/CSA B45.4-08.
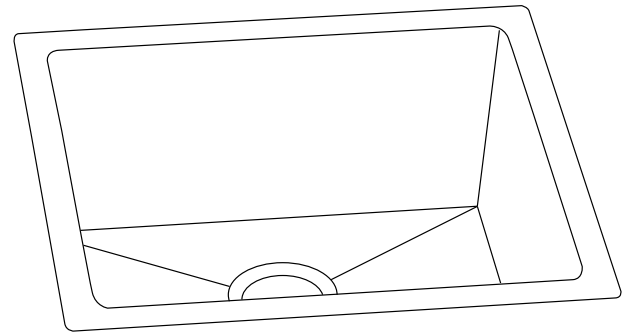
OPTIONAL ACCESSORIES
Drains: LK335, LK372.
Mounting Clip: LKUCLIP8.

Model PLAFRU191610

SINK DIMENSIONS*

Model Number	Overall		Inside Bowl			Cutout in Countertop	Minimum Cabinet Size
	L	W	L	W	D		
PLAFRU191610	21 1/2 (546mm)	18 1/2 (470mm)	19 (483mm)	16 (406mm)	10 (254mm)	See Template**	27 (686mm)
PLAFRU281610	30 1/2 (775mm)	18 1/2 (470mm)	28 (711mm)	16 (406mm)	10 (254mm)		36 (914mm)

*Length is left to right. Width is front to back.
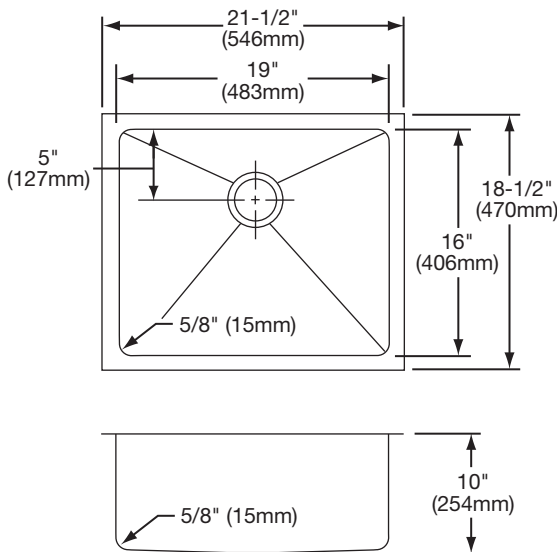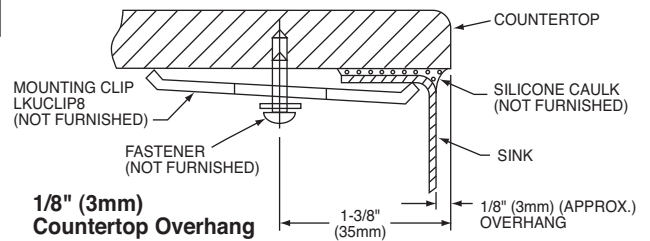**Template is packed with every sink.
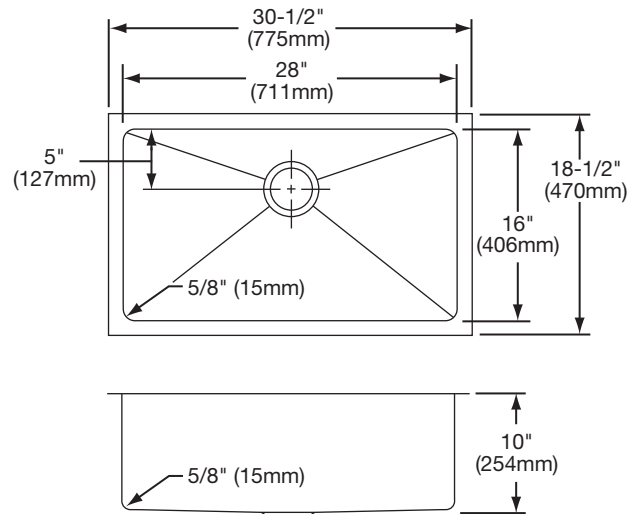
Installation Profile of PLAFRU Models
The template provided with each sink provides the only type of installation recommended by Elkay.

COUNTERTOP
MOUNTING CLIP LKUCLIP8 (NOT FURNISHED)
SILICONE CAULK (NOT FURNISHED)
SINK
FASTENER (NOT FURNISHED)
1/8" (3mm) Countertop Overhang
1-3/8" (35mm)
1/8" (3mm) (APPROX.) OVERHANG

21-1/2" (546mm)
19" (483mm)
5" (127mm)
18-1/2" (470mm)
16" (406mm)
5/8" (15mm)
10" (254mm)
5/8" (15mm)
Model PLAFRU191610 Illustrated

30-1/2" (775mm)
28" (711mm)
5" (127mm)
18-1/2" (470mm)
16" (406mm)
5/8" (15mm)
10" (254mm)
5/8" (15mm)
Model PLAFRU281610 Illustrated