

SPEAKMAN COMPANY

VS-100-AF Installation, Maintenance & Operation Instructions VERSATILE® HAND HELD SHOWER

DESCRIPTION

VERSATILE® hand held shower. 50 individual rubber tipped sprays. Water conserving pause button. Pressure compensating flow control device reduces flow to 2.5 GPM/9.46LPM maximum, to meet existing ANSI A112.18.1 Standard. ½" NPSM inlet.

SPECIFICATIONS

SUPPLY INLET: ½" NPSM
FLOW RATE: 2.5 GPM/9.46LPM MAXIMUM
SHIPPING WEIGHT: .54 LBS.

INSTALLATION

Connect supply hose to end of hand held shower. Firmly hand tighten. Turn water supply on and check for leaks.

OPERATION


To operate the pause button, simply push the button to one side. To return to the spray mode, push the button back from the opposite side.

MAINTENANCE

The finish of your SPEAKMAN VERSATILE® hand held shower can be cleaned by using mild soap and warm water. Dry immediately with a soft, clean cloth for best results. The flow control device limits water flow to 2.5 gallons per minute. The small orifice may become clogged with scale and other minerals found in potable water. To clean the flow regulator, located in the hand shower, simply remove the hose from the hand shower and clean as necessary.

ROUGH-IN MEASUREMENTS

Product improvements may cause specification and dimensional changes without notice.

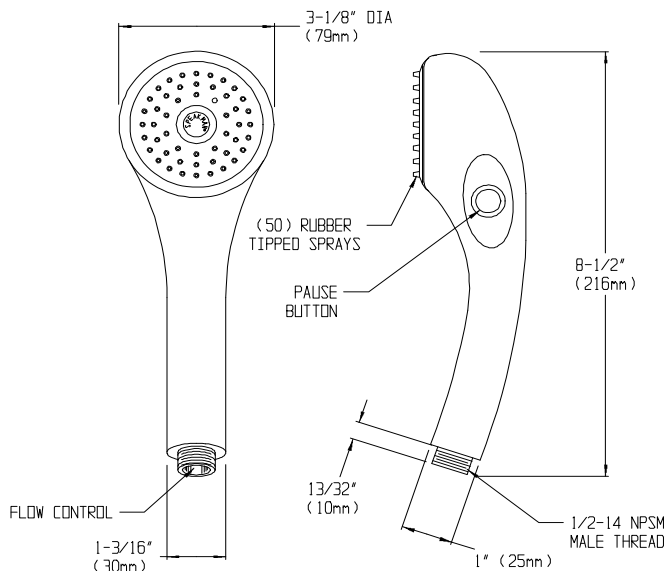

SPEAKMAN®

PO Box 191 Wilmington, DE 19899

Phone: 800-537-2107 Fax: 800-977-2747

Visit us on the web at www.speakmancompany.com

10/07
92-1773-2