



A KOHLER COMPANY

TRANQUILITY™

## Features

- 1-1/4 hp pump with air switch and grounding-type plug-in cord
- Compression molded from Sterling's exclusive solid VIKRELL™ material
- Lightly pebbled bottom surface for sure footing
- Available in either a high gloss or swirl gloss finish
- 10 year consumer/3 year commercial limited warranty, pump motor assembly has 1 year limited warranty
- 6 Jets with independent variable control
- 60" (152.4 cm) x 43-1/2" (104.6 cm) x 18-1/8" (46 cm) complete unit rough-in dimensions include flange
- 60" (152.4 cm) x 42" (106.7 cm) x 18-1/8" (46 cm) finished dimensions

## Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.19.7
- ANSI Z124.1
- IAPMO/UPC
- Underwriter's Laboratories (UL)
- HUD, UM Bulletin 73A

42" (106.7 cm) OVAL BATH WHIRLPOOL

**66050100**

ALSO 66051100, 76050100, 76051100

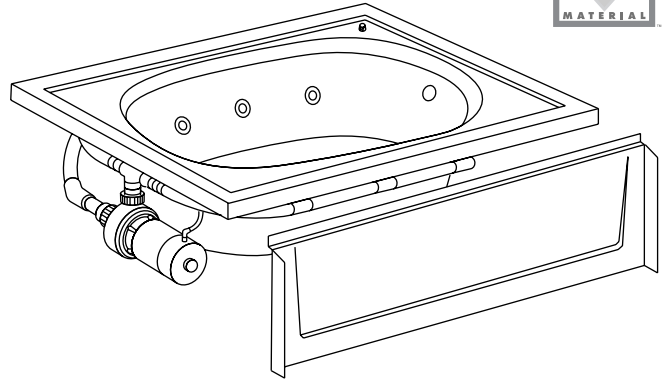

## Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## Specified Model

Model	Description	Colors/Finishes	
76051100	42" (106.7 cm) oval bath whirlpool, high gloss, without apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
76050100	42" (106.7 cm) oval bath whirlpool, high gloss, with apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
66051100	42" (106.7 cm) oval bath whirlpool, swirl gloss, without apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
66050100	42" (106.7 cm) oval bath whirlpool, swirl gloss, with apron	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
Optional Accessories			
71058100	Apron (High Gloss)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____
61058100	Apron (Swirl Gloss)	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____

## SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

# TRANQUILITY™

## Technical Information

Fixture:*	basin area	top area
Bathing well	42" (106.7 cm) x 23" (58.4 cm)	51" (129.5 cm) x 32-1/2" (82.6 cm)
	water depth	capacity
To overflow	11-1/4" (28.6 cm)	56 gal. (212 L)
* Approximate measurements for comparison only.		

Pump:	HP	V	Hz	A
1-speed	1-1/4	120	60	7

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump	120 V, 15 A, 60 Hz

## Installation Notes

Install this product according to the installation guide.

Pump is supplied with a grounding-type plug-in cord. Locate the outlet behind the whirlpool, and within 24" (61 cm) of the pump.

Pump access opening is required.


Do not disassemble the pump or piping as this could void the warranty.

Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

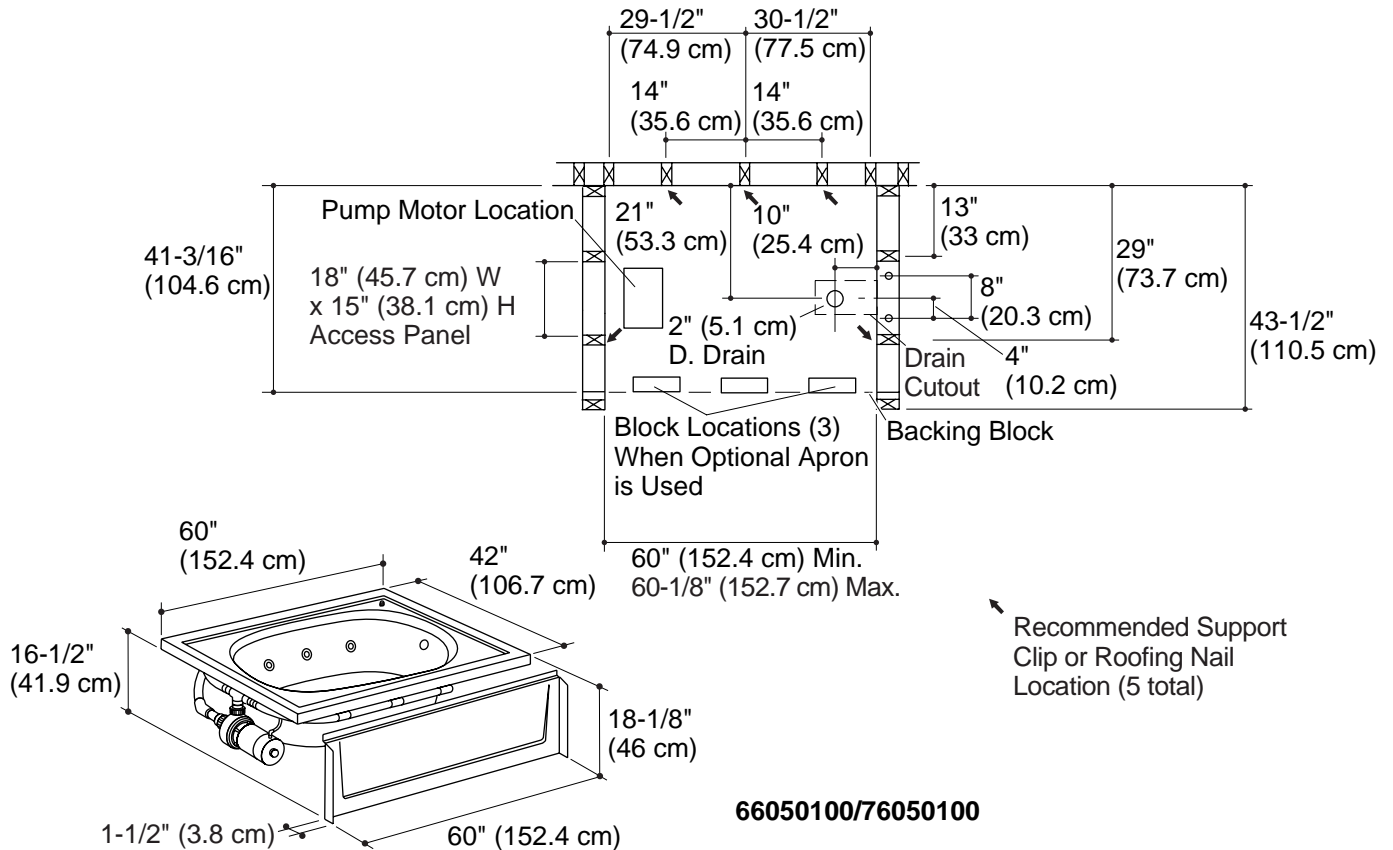

## Product Diagram